

Ribbon PRO




LED Strip | 680 topLED 43 W DC 48 V | 8.6 W/m
1296.4 Lm/m | CRI >90

C00423WHMDI




Technical data	
Length	5000 mm
Minimum cut	125 mm
Type	LED Strip
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward
Nominal power	43 W DC
Power / m	8.6 W / m
Source lumens	6482 lm
Source lumens / m	1296.4 lm / m
Input voltage range	48V
CCT / Tone	2700 K
Colour rendering index	>90 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP20
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.3 m
Resin potting	No
Type of light emission	Single emission
Length	5000 mm
Net weight	0.09 Kg
Electrostatic discharge protection	No
Surge protection	No

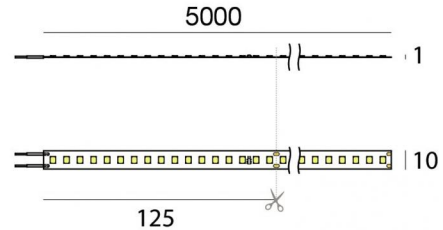



Finishing casing


Colour	white
--------	-------


Electronics

	99331 On/Off Driver 198~264V AC / 176~275V DC 150 W (1 - 3 art.)
---	---

	99332 1-10V Controller (1 - 3 art.)
---	--

	99374 On/Off Driver 198~264V AC / 176~275V DC 75 W (1 art.)
---	--

	83333 Push and Simply Dim - DALI-2 Controller (1 - 3 art.)
---	---

	C-E400002 Push and Simply Dim - DALI-2 Controller (1 - 5 art.)
---	---

Cables Electrification

Max cable length	300 mm
------------------	--------



LED Strip | 680 topLED 43 W DC 48 V | 8.6 W/m | 1296.4 Lm/m | CRI >90 | Base
C00423WHMDI


Single emission led strip for indoor application. The super warm white LED light source with a diffused light distribution is composed of 680 topped LEDs with CCT of 2700 K and a CRI >90; the source luminous flux is 6482 lm, with a 150.7 lm/W nominal luminous efficacy.

The device body and features a white finish. The ingress protection degree is IP20; the total weight is of 0.09 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 43 W. The power supply cable is included and features a 0.3 m length.

The device features protection class III and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

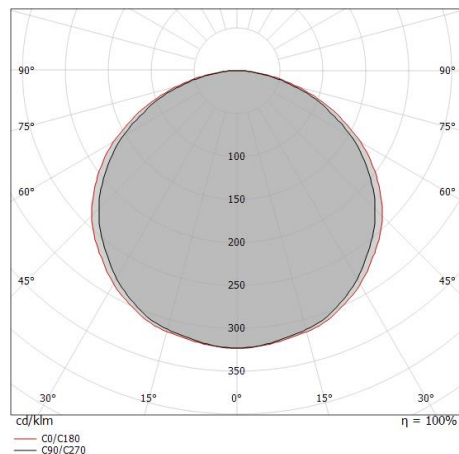

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.64 1.78	E(0°) 8383 E(C90) 595 E(C0) 492
1.0	3.28 3.56	E(0°) 2096 E(C90) 149 E(C0) 123
1.5	4.91 5.35	E(0°) 931 E(C90) 66 E(C0) 55
2.0	6.55 7.13	E(0°) 524 E(C90) 37 E(C0) 31
2.5	8.19 8.91	E(0°) 335 E(C90) 24 E(C0) 20
3.0	9.83 10.69	E(0°) 233 E(C90) 17 E(C0) 14

— C0/C180 (Half-peak divergence: 121.4°)
 — C90/C270 (Half-peak divergence: 117.2°)

Energy efficiency class

This product contains a light source of energy efficiency class E.



Illuminotechnical Features

Light Output Ratio (LOR)	100 %
Source lumens	6482 lm
Delivered lumens	6482 lm
Consumption	43 W
Luminaire efficacy	150 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Standard Operating Ambient Temperature	-20 / +55°C

UGR

UGR axial	29.7
UGR transversal	30.1
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C90/C270 optics	117°
C0/C180 optics	121°
Light distribution symmetry	Symmetrical 2 axis





Ribbon PRO



LED Strip | 680 topLED 43 W DC 48 V | 8.6 W/m | 1296.4 Lm/m | CRI >90

C00423WHMDI

Components

















		LUNO_20/27 - Profili Modular	Code <u>C-K100017</u>
		LUNO_20/27 - Profili Modular	Code <u>C-K100018</u>
		Rive_17/16 - Profili Modular	Code <u>C-K100015</u>
		Rive_17/16 - Profili Modular	Code <u>C-K100016</u>
		Cela_18/18 - Profili Modular	Code <u>C-K100019</u>
		Cela_18/18 - Profili Modular	Code <u>C-K100020</u>
		Tabulo_35/14 - Profili Modular	Code <u>C-K100025</u>
		Fylo+ Recessed_2	Code <u>65007 - 65006</u>

Ribbon PRO



LED Strip | 680 topLED 43 W DC 48 V | 8.6 W/m | 1296.4 Lm/m | CRI >90
C00423WHMDI

Components

		Fylo+ Recessed_1	Code <u>65027 - 65028</u>
		Fylo+ Recessed_4	Code <u>65009 - 65010</u>
		Fylo+ Recessed_5	Code <u>65012 - 65013</u>
		Fylo+ Surface_1	Code <u>65015 - 65016</u>
		Fylo+ Surface_2	Code <u>65018 - 65019</u>
		Fylo+ Surface_3	Code <u>65021 - 65022</u>
		Fylo+ Surface_4	Code <u>65025 - 65024</u>
		Fylo+ Recessed_3	Code <u>65004 - 65003</u>

Ribbon PRO



LED Strip | 680 topLED 43 W DC 48 V | 8.6 W/m | 1296.4 Lm/m | CRI >90
C00423WHMDI

Components



















Fylo+ Direct_1

Code

65180 - 65181



















 <p>5x</p>	 <p>25 30 6,8</p>	<p>Springs for recessing - 5 pieces</p>	<p>Code <u>98420</u></p>
	 <p>2,5 18 2000</p>	<p>Diffuser Diffuser Type: opaline diffuser. Material:PC, colour:opaline.</p>	<p>Finish Opaline Code <u>98395</u></p>
	 <p>15 2000</p>	<p>Diffuser</p>	<p>Code <u>98941</u></p>
	 <p>15 2000</p>	<p>Diffuser</p>	<p>Code <u>98942</u></p>
	 <p>15 2000</p>	<p>Diffuser - Opaline Diffuser</p>	<p>Code <u>98943</u></p>
	 <p>24 2000</p>	<p>Diffuser</p>	<p>Code <u>98898</u></p>
	 <p>24 2000</p>	<p>Diffuser</p>	<p>Code <u>98899</u></p>
	 <p>24 2000</p>	<p>Diffuser</p>	<p>Code <u>98900</u></p>

Ribbon PRO



Ribbon PRO | LED Strip | Accessories
C00423WHMDI

		Diffuser		Code 98917
		Diffuser		Code 98925
		Diffuser Material:PC, colour:black.	Finish Black	Code 83132
		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200001
		Diffuser Material:PC, colour:black.	Finish Black	Code C-K200002
		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200003
		Diffuser Material:PC, colour:black.	Finish Black	Code C-K200004
		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200005



Ribbon PRO | LED Strip | Accessories
C00423WHMDI



Diffuser
 Material:PC, colour:opaline.

Finish
 Opaline **Code**
 C-K200007



Diffuser
 Material:PC, colour:black.

Finish
 Black **Code**
 C-K200009



Closing cap

Code
 98418



Closing cap - Closing cap
 Material:PC, colour:white.

Code
 98892



Closing cap

Code
 98928



Closing cap

Code
 98896



Closing cap

Code
 98902



Closing cap
 Material:Aluminium, colour:translucent.

Code
 98907



		<p>Closing cap Material:PC, colour:white.</p>	<p>Code <u>98922</u></p>
		<p>Closing cap Material:PC, colour:white.</p>	<p>Code <u>98918</u></p>
		<p>Closing cap Material:PC, colour:black.</p>	<p>Code <u>83133</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400023</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400019</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400020</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400021</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400022</u></p>

Ribbon PRO



Ribbon PRO | LED Strip | Accessories
C00423WHMDI

		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400025</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400027</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400029</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400031</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400033</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400035</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400036</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400038</u></p>

Ribbon PRO



Ribbon PRO | LED Strip | Accessories
C00423WHMDI

		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400037</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400041</u></p>
		<p>Bracket - Mounting bracket L=19mm, H=8mm, D=9mm. Material:Iron, colour:zinc, processing:Washing.</p>	<p>Code <u>98944</u></p>
		<p>Bracket L=9mm, H=8.8mm, D=21.8mm. Material:Iron, colour:translucent, processing:Washing.</p>	<p>Code <u>98931</u></p>
		<p>Bracket L=22mm, H=21.5mm, D=16.4mm. Material:PC, colour:transparent.</p>	<p>Finish Transp. Code <u>98904</u></p>
		<p>Bracket L=12mm, H=15mm, D=30mm. Material:PC, colour:white.</p>	<p>Finish White Code <u>98901</u></p>
		<p>Profile - Wall integrated side profile Material:Aluminium 6060, colour:Anodised Aluminum, processing:20 µm anodizing.</p>	<p>Code <u>98921</u></p>
		<p>Connector - Fast connector for Ribbon Plus 10mm - Ribbon PRO - Ribbon PRO 48V Length 21,6 mm.</p>	<p>Code <u>83398</u></p>



Ribbon PRO | LED Strip | Accessories
C00423WHMDI



Connector
 Length 15,4 mm.

Code
83399



Optics
 Light distribution: medium flood,Cover material: pc

Code
C-U100001



Bag / Fixing kit

Code
C-K100027



Bag / Fixing kit

Code
C-K100028



Bag / Fixing kit

Code
C-K100029