






Pendant Luminaires | 240 topLED 45 W DC 24 V

CRI 90

C00425BBNDI

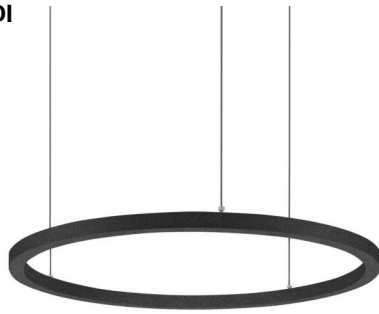

Ø 910



Technical data	
Type	Surface
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	upward
Nominal power	45 W DC
Source lumens	5540 lm
Input voltage range	24V
CCT / Tone	4000 K
Colour rendering index	90 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	4.85 m
Resin potting	No
Type of light emission	Single emission
Net weight	5.2 Kg
Electrostatic discharge protection	No
Surge protection	No
Optics technology	Dot free

Finishing casing

Material	Aluminium 6060
Colour	Black
Processing	Powder coating

Finishing diffuser

Material	UV Resistant Polycarbonate
Colour	opaline

Electronics

	99332 1-10V Controller (1 - 3 art.)
	99374 On/Off Driver 198~264V AC / 176~275V DC 75 W (1 art.)
	99722 DALI Controller 90~305V AC / 127~431V DC 120 W (1 - 2 art.)
	83333 Push and Simply Dim - DALI-2 Controller (1 - 3 art.)
	C-E400002 Push and Simply Dim - DALI-2 Controller (1 - 5 art.)



Pendant Luminaires | 240 topLED 45 W DC 24 V | CRI 90 | Base
C00425BBNDI

Single emission pendant luminaires for indoor application. The natural white LED light source with a diffused light distribution is composed of 240 topLEDs with CCT of 4000 K and a CRI 90; the source luminous flux is 5540 lm, with a 123.1 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a black finish, processed by means of powder coating; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP40; the total weight is of 5.2 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 45 W. The power supply cable is included and features a 4.85 m length.

The device features protection class III and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class


This product contains 10 light sources of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	54 %
Source lumens	5540 lm
Delivered lumens	3010 lm
Consumption	45 W
Luminaire efficacy	66 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Standard Operating Ambient Temperature	-20 / +50°C

LED Life / Failure Ratio

L70 B10 C0 145770h (at Tj 65 Ta 25)

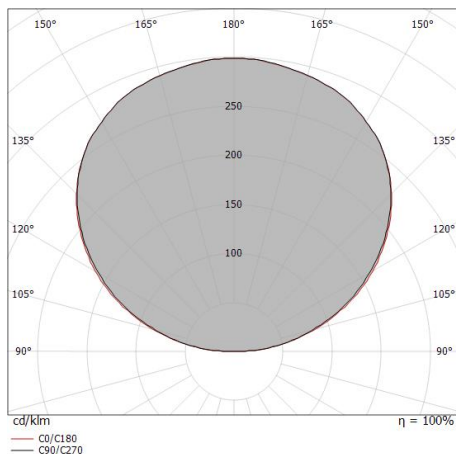

Distance [m]	Cone diameter [m]	Illuminance [lx]	E(180°)	E(C90)	E(C0)
3.0	11.58	11.58	61.8°	0	0
			62.6°	0	0
2.5	9.32	144	61.8°	0	0
	9.65		62.6°	0	0
2.0	7.46	225	61.8°	0	0
	7.72		62.6°	0	0
1.5	5.59	400	61.8°	0	0
	5.79		62.6°	0	0
1.0	3.73	899	61.8°	0	0
	3.86		62.6°	0	0
0.5	1.86	3598	61.8°	0	0
	1.93		62.6°	0	0

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 125.2°)
— C90/C270 (Half-peak divergence: 123.6°)



		<p>Ceiling rose - 3-wire rosette 220-240 V AC On-Off Max 90 W Driver included: Yes; Power Supply Management Protocol: On/off; Maximum power: 90W. Material:Iron, colour:Black, processing:Powder coating.</p>	<p>Code <u>65142</u></p>
		<p>Ceiling rose - 6-wire rosette 220-240 V AC On-Off Max 150 W + 150 W + 150 W Driver included: Yes; Power Supply Management Protocol: On/off; Maximum power: 150+150+150W. Material:Iron, colour:Black, processing:Powder coating.</p>	<p>Code <u>65413</u></p>
		<p>Ceiling rose Driver included: Yes; Power Supply Management Protocol: Phase cut; Maximum power: 50W. Material:Aluminium 6060, colour:Black, processing:Powder coating.</p>	<p>Code <u>64011</u></p>
		<p>Ceiling rose - 3-wire rosette 220-240 V AC DALI - 1-10V Max 70 W Driver included: Yes; Power Supply Management Protocol: Dali,1-10v; Maximum power: 70W. Material:Aluminium 6060, colour:Black, processing:Powder coating.</p>	<p>Code <u>64021</u></p>
		<p>Ceiling rose - 3-cables rosette 220-240 V AC Phase cut-off Max. 100 W Driver included: Yes; Power Supply Management Protocol: Phase cut; Maximum power: 100W. Material:Iron, colour:Black, processing:Powder coating.</p>	<p>Code <u>64031</u></p>
		<p>Ceiling rose - 6-wire rosette 220-240 V AC Phase-cut Max 100 W Driver included: Yes; Power Supply Management Protocol: Phase cut; Maximum power: 100W. Material:Iron, colour:Black, processing:Powder coating.</p>	<p>Code <u>64061</u></p>
		<p>Ceiling rose - 6-wire rosette 220-240 V AC On-Off Max 150 W Driver included: Yes; Power Supply Management Protocol: On/off; Maximum power: 150W. Material:Iron, colour:Black, processing:Powder coating.</p>	<p>Code <u>64067</u></p>
		<p>Ceiling rose - 3-wire rosette 220-240 V AC DALI Push Max. 75 W Driver included: Yes; Power Supply Management Protocol: Dali; Maximum power: 75W. Material:Iron, colour:Black, processing:Powder coating.</p>	<p>Code <u>C-F300014</u></p>



		<p>Ceiling rose - 3-wire rosette 220-240 V AC DALI2 Push Max. 150 W Driver included: Yes; Power Supply Management Protocol: Dali-2; Maximum power: 150W. Material:Aluminium 6060, colour:Black, processing:Powder coating.</p>	<p>Code <u>C-F300055</u></p>
		<p>Ceiling rose - 6-wire rosette 220-240 V AC DALI Push Max 150 W + 150 W Driver included: Yes; Power Supply Management Protocol: Dali; Maximum power: 150+150W. Material:Iron, colour:Black, processing:Powder coating.</p>	<p>Code <u>C-F300035</u></p>
		<p>Ceiling rose - 6-wire canopy 220-240 V AC DALI Push Max 75 W + 100 W 150 W Driver included: Yes; Power Supply Management Protocol: Dali; Maximum power: 75+100+150W. Material:Iron, colour:Black, processing:Powder coating.</p>	<p>Code <u>C-F300039</u></p>
		<p>Ceiling rose - 6-wire rosette 220-240 V AC DALI Push Max 150 W Driver included: Yes; Power Supply Management Protocol: Dali; Maximum power: 150W. Material:Iron, colour:Black, processing:Powder coating.</p>	<p>Code <u>C-F300029</u></p>
		<p>Suspensions - Fixing kit Material:Aluminium 6026, colour:Black, processing:Powder coating.</p>	<p>Code <u>64670</u></p>