


PU_C Plus RGBW



LED Strip | 600 topLED 96 W DC 24 V | 19.2 W/m
0 Lm/m | CRI >90 | RGBW - 3000

C00466WHVDI

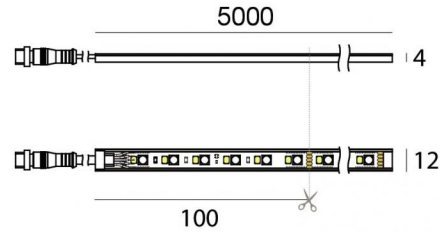

Technical data	
Length	5000 mm
Minimum cut	100 mm
Type	LED Strip
Installation position	Wall lights - Ceiling
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward
Nominal power	96 W DC
Power / m	19.2 W / m
Input voltage range	24V
CCT / Tone	RGBW - 3000 K
Colour rendering index	>90 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP66
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	Yes
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	5x 0.3 m
Resin potting	No
Type of light emission	Single emission
Length	5000 mm
Net weight	0.575 Kg
Electrostatic discharge protection	No
Surge protection	No


Finishing casing


Material	Technopolymer
Colour	white

Finishing diffuser

Material	PU
Colour	Opal

Electronics

 99331
On/Off Driver 198~264V AC / 176~275V DC 150 W (1 art.)

 99332
1-10V Controller (1 art.)

 C-E700005
DMX-RDM Multi Channel 10.8~26.4V DC W (- art.)

Cables Electrification

Cable connector	No
-----------------	----

Lumen RGBW

N. Led	Red	Green	Blue	white
600	729 lm	1449 lm	373 lm	3469 lm

PU_C Plus RGBW



LED Strip | 600 topLED 96 W DC 24 V | 19.2 W/m | 0 Lm/m | CRI >90 | RGBW - 3000
C00466WHVDI

Single emission led strip for outdoor application. The RGBW - 3000 K LED light source with a diffused light distribution is composed of 600 topped LEDs with CCT of RGB-W 3000 K and a CRI >90.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu. The ingress protection degree is IP66; the total weight is of 0.575 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 96 W. The power supply cable is included and features a 5x 0.3 m length.

The device features protection class III and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class F.



Illuminotechnical Features


Standard Deviation of Colour Matching	3 Step MacAdam
Standard Operating Ambient Temperature	-20 / +55°C

PU_C Plus RGBW



LED Strip | 600 topLED 96 W DC 24 V | 19.2 W/m | 0 Lm/m | CRI >90 | RGBW - 3000
C00466WHVDI

















Components

		LUNO_20/27 - Profili Modular	Code <u>C-K100017</u>
		LUNO_20/27	Code <u>C-K100018</u>
		Rive_17/16 - Profili Modular	Code <u>C-K100015</u>
		Rive_17/16 - Profili Modular	Code <u>C-K100016</u>
		Tabulo_35/14 - Profili Modular	Code <u>C-K100025</u>
		Rive_17/16 - Profili Modular	Code <u>C-K100026</u>
		Rive_17/16 - Profili Modular	Code <u>C-K100027</u>

PU_C Plus RGBW



















PU_C Plus RGBW | LED Strip | Accessories
C00466WHVDI

 <p>5x</p>	 <p>25 30 6,8</p>	<p>Springs for recessing - 5 pieces</p>	<p>Code <u>98420</u></p>
	 <p>2,5 18 2000</p>	<p>Diffuser Diffuser Type: opaline diffuser. Material:PC, colour:opaline.</p>	<p>Finish Opaline Code <u>98395</u></p>
	 <p>15 2000</p>	<p>Diffuser</p>	<p>Code <u>98941</u></p>
	 <p>15 2000</p>	<p>Diffuser</p>	<p>Code <u>98942</u></p>
	 <p>15 2000</p>	<p>Diffuser - Opaline Diffuser</p>	<p>Code <u>98943</u></p>
	 <p>24 2000</p>	<p>Diffuser</p>	<p>Code <u>98898</u></p>
	 <p>24 2000</p>	<p>Diffuser</p>	<p>Code <u>98899</u></p>
	 <p>24 2000</p>	<p>Diffuser</p>	<p>Code <u>98900</u></p>

PU_C Plus RGBW



PU_C Plus RGBW | LED Strip | Accessories
C00466WHVDI

		Diffuser Material:PC, colour:black.	Finish Black	Code 83132
		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200001
		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200003
		Diffuser Material:PC, colour:black.	Finish Black	Code C-K200004
		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200005
		Diffuser Material:PC, colour:black.	Finish Black	Code C-K200006
		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200007
		Diffuser Material:PC, colour:black.	Finish Black	Code C-K200008


















	<p>Diffuser Material:PC, colour:black.</p>	<p>Finish Black</p> <p>Code C-K200009</p>
	<p>Closing cap</p>	<p>Code 98418</p>
	<p>Closing cap</p>	<p>Code 98902</p>
	<p>Closing cap Material:Aluminium, colour:translucent.</p>	<p>Code 98907</p>
	<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code C-V400019</p>
	<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code C-V400020</p>
	<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code C-V400021</p>
	<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code C-V400022</p>

PU_C Plus RGBW



PU_C Plus RGBW | LED Strip | Accessories
C00466WHVDI

		Closing cap Material:plastic, colour:grey.	Code <u>C-V400025</u>
		Closing cap Material:ABS Plastic, colour:black.	Code <u>C-V400026</u>
		Closing cap Material:plastic, colour:grey.	Code <u>C-V400031</u>
		Closing cap Material:ABS Plastic, colour:black.	Code <u>C-V400032</u>
		Closing cap Material:ABS Plastic, colour:black.	Code <u>C-V400034</u>
		Closing cap Material:plastic, colour:grey.	Code <u>C-V400033</u>
		Closing cap Material:plastic, colour:grey.	Code <u>C-V400041</u>
		Bracket - Fixing kit for PU_C 5 m 1 x glue, 20 x brackets, 40 x M3 x 25 screws, 10 x plugs	Code <u>98964</u>

PU_C Plus RGBW



PU_C Plus RGBW | LED Strip | Accessories
C00466WHVDI

 x20 x10	Bracket - Bracket kit for PU_C 5 m and Silicone_C 5 m 10 x brackets, 20 x M3 x 25 screws	Code 89223	
	Bracket - Mounting bracket L=19mm, H=8mm, D=9mm. Material:Iron, colour:zinc, processing:Washing.	Code 98944	
	Bracket L=9mm, H=8.8mm, D=21.8mm. Material:Iron, colour:translucent, processing:Washing.	Code 98931	
	Bracket L=22mm, H=21.5mm, D=16.4mm. Material:PC, colour:transparent.	Finish Transp.	Code 98904
	Bracket L=12mm, H=15mm, D=30mm. Material:PC, colour:white.	Finish White	Code 98901
	Extension cable	Code 98947	