


Periskop80



Projectors | 198-264 V
1 arrayLED 9.5 W DC - 11.5 W AC | CRI 80
C00488GRNMW

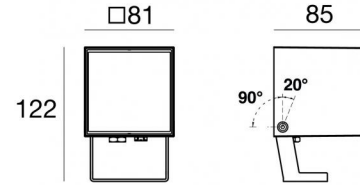

Technical data	
Type	Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Medium Wide Flood
Light emission direction	frontal
Nominal power	9.5 W DC
Total Power	11.5 W
Source lumens	1354 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP66
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	Swivelling
total angle (vertical plane)	110 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	No
Type of light emission	Single emission
Net weight	1 Kg
Electrostatic discharge protection	Yes
Surge protection	1 KV
Optics technology	Honey comb
Product technological characteristics	TCS

Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	Green
Processing	Open pore anodizing + Powder Coating

Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

Finishing bracket

Material	AISI 304 steel
Colour	Black
Processing	Powder coating



Projectors | 198-264 V | 1 arrayLED 9.5 W DC - 11.5 W AC | CRI 80 | Base
C00488GRNMW


Single emission projectors for outdoor application. The natural white LED light source with a medium wide flood light distribution is composed of 1 arrayed LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 1354 lm, with a 142.5 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a green finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP66; the total weight is of 1 kg.

The total absorbed power is 11.5 W. The power supply cable is included and features a 1 m length.

The device features protection class I and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

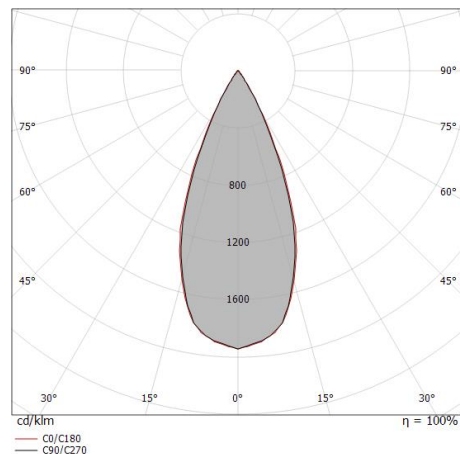

Distance [m]	Cone diameter [m]	Intensity [lx]	E(0°)	E(C90)	E(C0)
0.5	0.40 0.41	5276 2137 2114	21.6°	22.1°	21.6°
1.0	0.79 0.81	1319 534 529	21.6°	22.1°	21.6°
1.5	1.19 1.22	586 237 235	21.6°	22.1°	21.6°
2.0	1.58 1.62	330 134 132	21.6°	22.1°	21.6°
2.5	1.98 2.03	211 85 85	21.6°	22.1°	21.6°
3.0	2.38 2.44	147 59 59	21.6°	22.1°	21.6°

— C0/C180 (Half-peak divergence: 44.2°)
— C90/C270 (Half-peak divergence: 43.2°)

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	50 %
Source lumens	1354 lm
Delivered lumens	680 lm
Consumption	11.5 W
Luminaire efficacy	59 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio


L70 B10 C0 252000h (at Tj 65 Ta 25)

UGR

UGR axial	11.3
UGR transversal	11.1
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	43°
Light distribution simmetry	Symmetrical




Picket
installation position: land,Cover material: pc

Code
98549




Bag / Fixing kit - Belt for installation on tree

Code
99802



Anti-glare
Anti-glare Type: eyelid.
Material:AISI 304 steel, colour:Black, processing:Powder coating.

Code
C-U300023



Anti-glare
Anti-glare Type: snoot.
Material:Aluminium 6060, colour:Black, processing:Open pore anodizing + Powder Coating.

Code
C-U300026