


Ribbon Distance 130 LEDs/m



LED Strip | 1 topLED 192 W DC 48 V | 9.6 W/m
1082.35 Lm/m | CRI 90
C0049NDI20000

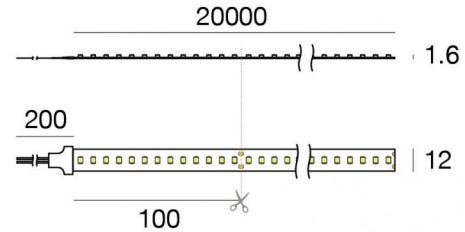

Technical data

Length	20000 mm
Minimum cut	100 mm
Type	LED Strip
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	external
Nominal power	192 W DC
Power / m	9.6 W / m
Source lumens	21647 lm
Source lumens / m	1082.35 lm / m
Input voltage range	48V
CCT / Tone	4000 K
Colour rendering index	90 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP20
Glow wire test	No
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Length	20000 mm
Net weight	1.6 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Technopolymer
Colour	white

Electronics

	99784 Switching Driver 180~295V AC / 255~417V DC 60 W (1 art.)
	99785 On/Off Driver 100~305V AC / 142~431V DC 240 W (1 art.)
	83177 Push and Simply Dim - DMX-RDM Controller (1 art.)
	C-E400003 Push and Simply Dim - DALI-2 Controller (1 art.)

Ribbon Distance 130 LEDs/m



LED Strip | 1 topLED 192 W DC 48 V | 9.6 W/m | 1082.35 Lm/m | CRI 90
C0049NDI20000

Single emission led strip for indoor application. The natural white LED light source with a diffused light distribution is composed of 2600 stripled LEDs with CCT of 4000 K and a CRI 90; the source luminous flux is 21647 lm, with a 112.7 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish. The ingress protection degree is IP20; the total weight is of 1.6 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 192 W. The power supply cable is included and features a 0.2 m length.

The device features protection class III and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class F.



Illuminotechnical Features

Source lumens	21647 lm
Colour temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Standard Operating Ambient Temperature	-20 / +45°C

LED Life / Failure Ratio







L70 B50 C0 50000h


Ribbon Distance 130 LEDs/m



LED Strip | 1 topLED 192 W DC 48 V | 9.6 W/m | 1082.35 Lm/m | CRI 90
C0049NDI20000


Components

		LUNO_20/27 - Profili Modular	Code <u>C-K100017</u>
		LUNO_20/27 - Profili Modular	Code <u>C-K100018</u>
		Tabulo_35/14 - Profili Modular	Code <u>C-K100025</u>

Connector
Length 15,4 mm.


Code
83399



Diffuser
Material:PC, colour:opaline.

Finish
Opaline


Code
C-K200001



Diffuser
Material:PC, colour:black.


Finish
Black

Code
C-K200002



Bracket
L=9mm, H=8.8mm, D=21.8mm.
Material:Iron, colour:translucent, processing:Washing.


Code
98931



Diffuser
Material:PC, colour:opaline.

Finish
Opaline

Code
C-K200003



Diffuser
Material:PC, colour:black.

Finish
Black

Code
C-K200004



Diffuser

Code
98898



Diffuser

Code
98899

Ribbon Distance 130 LEDs/m



Ribbon Distance 130 LEDs/m | LED Strip | Accessories
C0049NDI20000




Diffuser

Code
98900




Closing cap

Code
98902



Bracket
 L=12mm, H=15mm, D=30mm.
 Material:PC, colour:white.

Finish
 White White **Code**
98901




Closing cap
 Material:Aluminium, colour:translucent.

Code
98907




Diffuser
 Material:PC, colour:black.

Finish
 Black Black **Code**
C-K200009




Closing cap
 Material:plastic, colour:grey.

Code
C-V400041



Diffuser
 Diffuser Type: opaline diffuser.
 Material:PC, colour:opaline.

Finish
 Opaline Opaline **Code**
98395



Closing cap















Code
98418

Ribbon Distance 130 LEDs/m



Ribbon Distance 130 LEDs/m | LED Strip | Accessories

C0049NDI20000

 <p>5x</p>	 <p>25 30 6,8</p>	Springs for recessing - 5 pieces	Code <u>98420</u>
	 <p>BCNBB-2 5,70 4,30 3,00 8,30 2,50 4,30 21,60</p>	Connector - Fast connector for Ribbon Basic V2 8mm, Ribbon HD 8mm (not Ribbon COB) Length 21,6 mm.	Code <u>83396</u>
	 <p>3,30 3,80 8,30 4,30 9,50 15,10</p>	Connector - Fast connector for Ribbon Basic V2 8mm, Ribbon HD 8mm (not Ribbon COB) Length 15,4 mm.	Code <u>83397</u>
	 <p>20 5 20,3</p>	Closing cap Material:plastic, colour:grey.	Code <u>C-V400019</u>
	 <p>20 5 20,3</p>	Closing cap Material:ABS Plastic, colour:black.	Code <u>C-V400020</u>
	 <p>20 5 20,3</p>	Closing cap Material:plastic, colour:grey.	Code <u>C-V400021</u>
	 <p>20 5 20,3</p>	Closing cap Material:ABS Plastic, colour:black.	Code <u>C-V400022</u>