


Ribbon Distance 130 LEDs/m




LED Strip | 1 topLED 207 W DC 48 V | 13.8 W/m
1542.13 Lm/m | CRI 90
C0050NDI15000



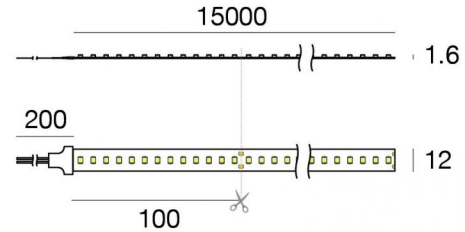

Technical data	
Length	15000 mm
Minimum cut	100 mm
Type	LED Strip
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	external
Nominal power	207 W DC
Power / m	13.8 W / m
Source lumens	23132 lm
Source lumens / m	1542.13 lm / m
Input voltage range	48V
CCT / Tone	4000 K
Colour rendering index	90 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP20
Glow wire test	No
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Length	15000 mm
Net weight	1.2 Kg
Electrostatic discharge protection	No
Surge protection	No


Finishing casing	
Material	Technopolymer
Colour	white

Electronics

- 
99784
Switching Driver 180~295V AC / 255~417V DC 60 W (1 art.)

- 
99785
On/Off Driver 100~305V AC / 142~431V DC 240 W (1 art.)

- 
83177
Push and Simply Dim - DMX-RDM Controller (1 art.)

- 
C-E400003
Push and Simply Dim - DALI-2 Controller (1 art.)

Ribbon Distance 130 LEDs/m



LED Strip | 1 topLED 207 W DC 48 V | 13.8 W/m | 1542.13 Lm/m | CRI 90
C0050NDI15000

Single emission led strip for indoor application. The natural white LED light source with a diffused light distribution is composed of 1950 stripled LEDs with CCT of 4000 K and a CRI 90; the source luminous flux is 23132 lm, with a 111.7 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish. The ingress protection degree is IP20; the total weight is of 1.2 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 207 W. The power supply cable is included and features a 0.2 m length.

The device features protection class III and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class F.



Illuminotechnical Features

Source lumens	23132 lm
Colour temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Standard Operating Ambient Temperature	-20 / +45°C

LED Life / Failure Ratio







L70 B50 C0 50000h

Ribbon Distance 130 LEDs/m



LED Strip | 1 topLED 207 W DC 48 V | 13.8 W/m | 1542.13 Lm/m | CRI 90
C0050NDI15000

Components

		LUNO_20/27 - Profili Modular	Code <u>C-K100017</u>
		LUNO_20/27 - Profili Modular	Code <u>C-K100018</u>
		Tabulo_35/14 - Profili Modular	Code <u>C-K100025</u>



Ribbon Distance 130 LEDs/m | LED Strip | Accessories
C0050NDI15000

		<p>Connector Length 15,4 mm.</p>	<p>Code <u>83399</u></p>
--	--	---	--------------------------------------

		<p>Diffuser Material:PC, colour:opaline.</p>	<p>Finish Opaline Code C-K200001</p>
--	--	---	--

		<p>Diffuser Material:PC, colour:black.</p>	<p>Finish Black Code C-K200002</p>
--	--	---	--

		<p>Bracket L=9mm, H=8.8mm, D=21.8mm. Material:Iron, colour:translucent, processing:Washing.</p>	<p>Code <u>98931</u></p>
--	--	---	--------------------------------------

		<p>Diffuser Material:PC, colour:opaline.</p>	<p>Finish Opaline Code C-K200003</p>
--	--	---	--

		<p>Diffuser Material:PC, colour:black.</p>	<p>Finish Black Code C-K200004</p>
--	--	---	--

		<p>Diffuser</p>	<p>Code <u>98898</u></p>
--	--	-----------------	--------------------------------------

		<p>Diffuser</p>	<p>Code <u>98899</u></p>
--	--	-----------------	--------------------------------------

Ribbon Distance 130 LEDs/m



Ribbon Distance 130 LEDs/m | LED Strip | Accessories
C0050NDI15000




Diffuser

Code
98900




Closing cap

Code
98902



Bracket
 L=12mm, H=15mm, D=30mm.
 Material:PC, colour:white.

Finish
 White White **Code**
98901




Closing cap
 Material:Aluminium, colour:translucent.

Code
98907




Diffuser
 Material:PC, colour:black.

Finish
 Black Black **Code**
C-K200009




Closing cap
 Material:plastic, colour:grey.

Code
C-V400041



Diffuser
 Diffuser Type: opaline diffuser.
 Material:PC, colour:opaline.

Finish
 Opaline Opaline **Code**
98395

















Closing cap

Code
98418

Ribbon Distance 130 LEDs/m



Ribbon Distance 130 LEDs/m | LED Strip | Accessories
C0050NDI15000

		<p>Springs for recessing - 5 pieces</p>	<p>Code <u>98420</u></p>
		<p>Connector - Fast connector for Ribbon Basic V2 8mm, Ribbon HD 8mm (not Ribbon COB) Length 21,6 mm.</p>	<p>Code <u>83396</u></p>
		<p>Connector - Fast connector for Ribbon Basic V2 8mm, Ribbon HD 8mm (not Ribbon COB) Length 15,4 mm.</p>	<p>Code <u>83397</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400019</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400020</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400021</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400022</u></p>