

LED Strip | 1 topLED 50 W DC 24 V | 10 W/m 978.4 Lm/m | CRI 90

C00513WHWDI







Length	
	5000 mm
Minimum cut	50 mm
Туре	LED Strip
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	upward
Nominal power	50 W DC
Power / m	10 W / m
Source lumens	4892 lm
Source lumens / m	978.4 lm / m
Input voltage range	24V
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP20
Glow wire test	No
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Length	5000 mm
Net weight	0.17 Kg
Electrostatic discharge protection	No
Surge protection	No


















Finishing casing	
Material	Technopolymer
Colour	white

Electronics



99331 On/Off Driver 198~264V AC / 176~275V DC 150 W (1 -3 art.)



99332

1-10V Controller (1 - 3 art.)



99374

On/Off Driver 198~264V AC / 176~275V DC 75 W (1



83333

Push and Simply Dim - DALI-2 Controller (1 - 3 art.)



C-E400002

Push and Simply Dim - DALI-2 Controller (1 - 4 art.)



LED Strip | 1 topLED 50 W DC 24 V | 10 W/m | 978.4 Lm/m | CRI 90 | Base C00513WHWDI


Single emission led strip for indoor application. The warm white LED light source with a diffused light distribution is composed of 1600 stripled LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 4892 lm, with a 97.8 lm/W nominal luminous efficacy.


The device body is made of technopolymer and features a white finish. The ingress protection degree is IP20; the total weight is of 0.17 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 50 W. The power supply cable is included and features a 0.2 m length.

The device features protection class III and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

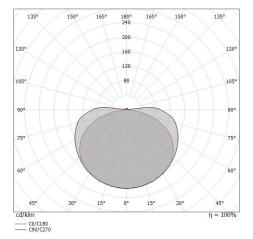



— C0/C180 (Half-peak divergence: 135.4°) — C90/C270 (Half-peak divergence: 172.8°)

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotechnical Features	
Light Output Ratio (LOR)	100 %
Source lumens	4892 lm
Delivered lumens	4892 lm
Consumption	50 W
Luminaire efficacy	97 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Standard Operating Ambient Temperature	-20 / +45°C

LED Life / Failure Ratio

L70 B50 C0 50000h

UGR	
UGR axial	32.8
UGR transversal	29.5
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
C90/C270 optics	173°
C0/C180 optics	135°
Light distribution simmetry	Symmetrical 2 assis





LED Strip | 1 topLED 50 W DC 24 V | 10 W/m | 978.4 Lm/m | CRI 90 ${ m C00513WHWDI}$

Components





LUNO_20/27 - Profili | Modular

Code

C-K100017






LUNO_20/27 - Profili | Modular

Code

C-K100018






Rive_17/16 - Profili | Modular

Code

C-K100015





Rive_17/16 - Profili | Modular

Code

C-K100016





Cela_18/18 - Profili | Modular

Code

C-K100019





Cela_18/18 - Profili | Modular

Code C-K100020





Tabulo_35/14 - Profili | Modular

Code

C-K100025



The state of the s	5.92 11-90 - 10,00 - 2,10	Connector Length 15,4 mm.		Code 83399
	e 5000	Diffuser		Code 98941
	of 15 2000	Diffuser		Code 98942
	on 19 5000	Diffuser - Opaline Diffuser		Code 98943
	- 19 2009	Diffuser Material:PC, colour:black.	Finish Black	Code 83132
	16 2009 41 Formal	Optics Light distribution: medium flood,Cover material: pc	Cod C-U	le 100001
19 3000		Diffuser Material:PC, colour:opaline.	Finish Cod Opaline C-K2	le 200005
± 17 2000 ± 17 2000		Diffuser Material:PC, colour:opaline.	Finish Cod Opaline C-K	l e 200007

5/10 23.12.2024



	2	Closing cap - Closing cap Material:PC, colour:white.	Code 98892
44		Closing cap Material:PC, colour:black.	Code 83133
		Closing cap Material:plastic, colour:grey.	Code C-V400023
		Closing cap Material:plastic, colour:grey.	Code <u>C-V400027</u>
		Closing cap Material:plastic, colour:grey.	Code <u>C-V400029</u>
	-	Bracket - Mounting bracket L=19mm, H=8mm, D=9mm. Material:Iron, colour:zinc, processing:Washing.	Code 98944
	15.3	Diffuser	Code 98925
		Closing cap	Code 98928



Ribbon Cob | LED Strip | Accessories C00513WHWDI


21	Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200001
19 2000	Diffuser Material:PC, colour:black.	Finish Black	Code C-K200002
2 20	Bracket L=9mm, H=8.8mm, D=21.8mm. Material:Iron, colour:translucent, processing:Washing.		Code 98931
77 21 2000	Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200003
21 2000	Diffuser Material:PC, colour:black.	Finish Black	Code C-K200004
	Closing cap Material:plastic, colour:grey.		Code C-V400035
	Closing cap Material:ABS Plastic, colour:black.		Code C-V400036
16 TO 16 TO 104	Closing cap Material:plastic, colour:grey.		Code C-V400025

5 707 5 707




		Closing cap Material:plastic, colour:grey.	Code <u>C-V400031</u>
	3)	Closing cap Material:plastic, colour:grey.	Code C-V400033
5	F 12 2000	Bag / Fixing kit	Code C-K100027
		Closing cap	Code 98896
	24 2000	Diffuser	Code 98898
	24 2000	Diffuser	Code 98899
	24 2000	Diffuser	Code 98900
	E 0 0 1	Closing cap	Code 98902



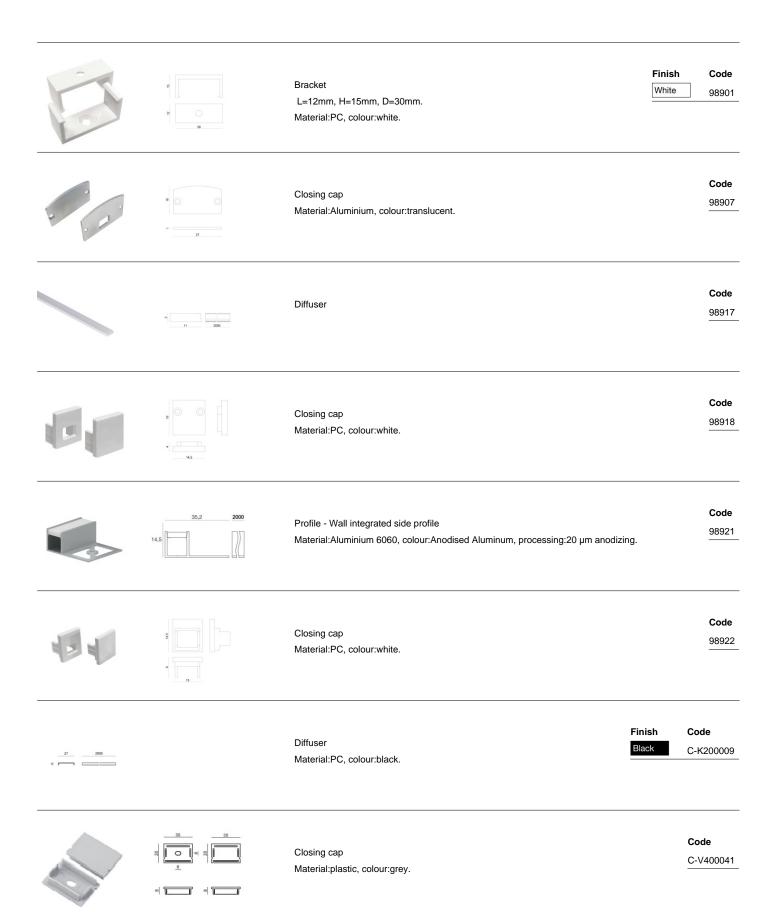

9/10 23.12.2024



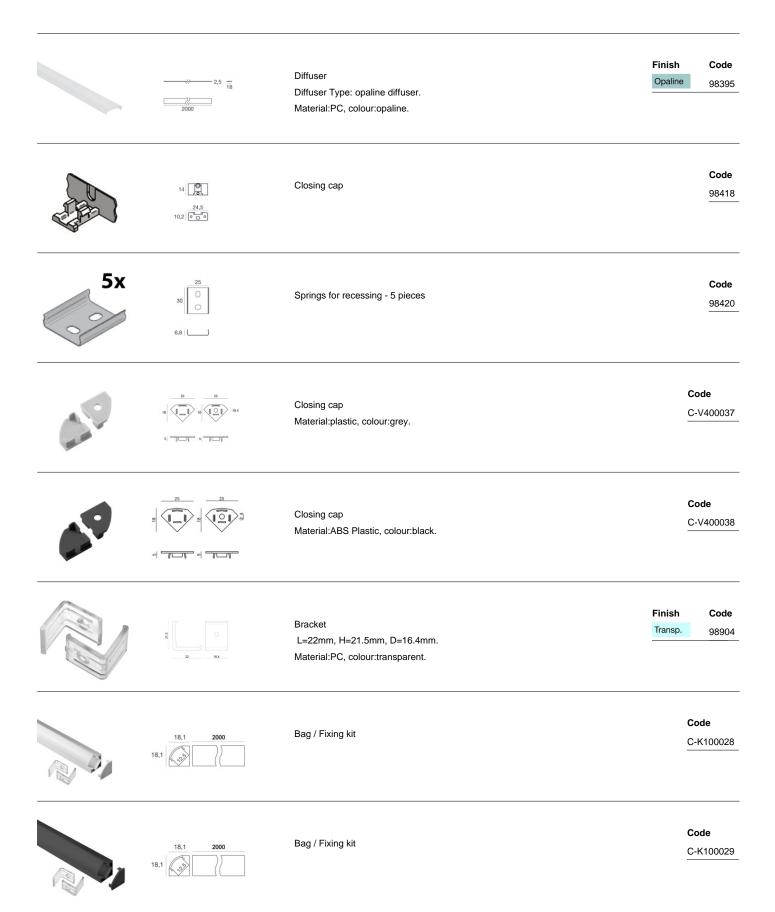



NA WE WAY	8 2 3 5 5 5 6 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	Connector - Fast connector for Ribbon Basic V2 8mm, Ribbon HD 8mm (not Ribbon COB) Length 21,6 mm.	Code 83396
The Real Property of the Party	1 2 3 20 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	Connector - Fast connector for Ribbon Basic V2 8mm, Ribbon HD 8mm (not Ribbon COB) Length 15,4 mm.	Code 83397
		Connector - Quick cable-strip / strip-strip connector for Ribbon COB Length 9.6 mm.	Code C-W400003
	F2 20.5	Closing cap Material:plastic, colour:grey.	Code C-V400019
	F2	Closing cap Material:ABS Plastic, colour:black.	Code C-V400020
	E	Closing cap Material:plastic, colour:grey.	Code C-V400021
	Fi	Closing cap Material:ABS Plastic, colour:black.	Code C-V400022