

LED Strip | 1 topLED 24 W DC 24 V | 4.8 W/m 423 Lm/m | CRI 90

C0051MDI05019








Technical data	
Length	5000 mm
Minimum cut	100 mm
Туре	LED Strip
Installation position	Wall lights - Ceiling
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	external
Nominal power	24 W DC
Power / m	4.8 W / m
Source lumens	2115 lm
Source lumens / m	423 lm / m
Input voltage range	24V
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP67
Glow wire test	No
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.3 m
Resin potting	No
Type of light emission	Single emission
Length	5000 mm
Net weight	0.4 Kg
Electrostatic discharge protection	No
Surge protection	No



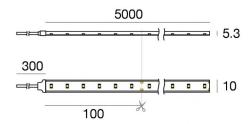

Finishing casi	ing	
Material	Silicone	
Colour	transparent	

Electronics



99331 On/Off Driver 198~264V AC / 176~275V DC 150 W (1 -6 art.)



1-10V Controller (1 - 6 art.)

99374





On/Off Driver 198~264V AC / 176~275V DC 75 W (1 - 3



83333 Push and Simply Dim - DALI-2 Controller (1 - 6 art.)



C-E400002 Push and Simply Dim - DALI-2 Controller (1 - 10 art.)



LED Strip | 1 topLED 24 W DC 24 V | 4.8 W/m | 423 Lm/m | CRI 90 **C0051MDI05019**

Single emission led strip for outdoor application. The super warm white LED light source with a diffused light distribution is composed of 300 stripled LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 2115 lm, with a 88.1 lm/W nominal luminous efficacy.

The device body is made of silicone and features a transparent finish. The ingress protection degree is IP67; the total weight is of 0.4 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is $24\,\mathrm{W}$. The power supply cable is included and features a $0.3\,\mathrm{m}$ length.

The device features protection class III and can be wall lights or ceilingmounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class G.

2115 lm
2700 K
3 Step MacAdam
90 Ra
-20 / +45°C

LED Life / Failure Ratio


L70 B50 C0 50000h





LED Strip | 1 topLED 24 W DC 24 V | 4.8 W/m | 423 Lm/m | CRI 90 **C0051MDI05019**

Components

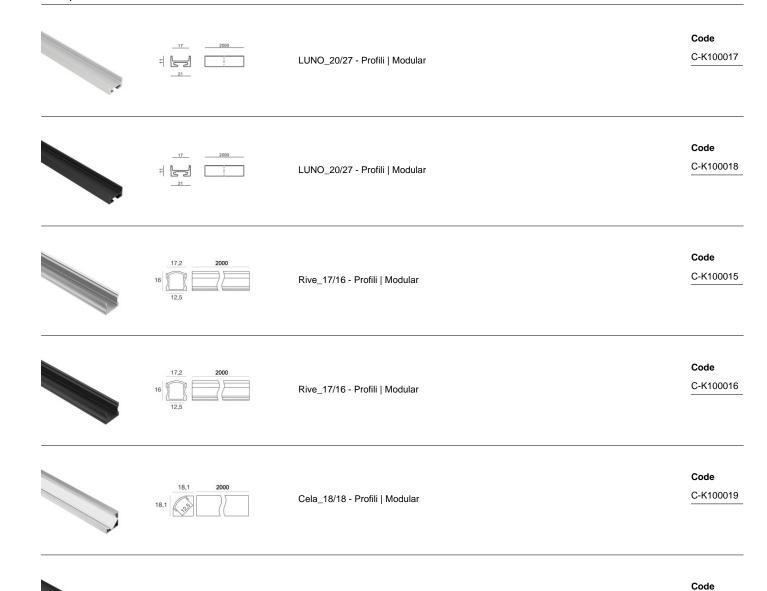





Tabulo_35/14 - Profili | Modular

Cela_18/18 - Profili | Modular

Code C-K100025

C-K100020



x20 x10		Bracket - Bracket kit for PU_C 5 m and Silicone_C 5 m 10 x brackets, 20 x M3 x 25 screws	
X5		Bag / Fixing kit - Fixing kit for Silicone_C 5 m 1 x glue, 10 x plugs	Code <u>C-V400002</u>
	21 2500	Diffuser Material:PC, colour:opaline.	
	18 2000 21 2000	Diffuser Material:PC, colour:black.	_
	2 21.9	Bracket L=9mm, H=8.8mm, D=21.8mm. Material:Iron, colour:translucent, processing:Washing.	Code 98931
	71 2000	Diffuser Material:PC, colour:opaline.	
	71 2000	Diffuser Material:PC, colour:black.	_
	W 2000	Diffuser	Code 98898



	a 24 2008	Diffuser	Code 98899
	a 34 2009	Diffuser	Code 98900
		Closing cap	Code 98902
	50 O	Bracket L=12mm, H=15mm, D=30mm. Material:PC, colour:white.	Finish Code White 98901
		Closing cap Material:Aluminium, colour:translucent.	Code 98907
27 2900		Diffuser Material:PC, colour:black.	Finish Code Black C-K200009
		Closing cap Material:plastic, colour:grey.	Code C-V400041
	2,5 18	Diffuser Diffuser Type: opaline diffuser. Material:PC, colour:opaline.	Finish Code Opaline 98395



	14 24.5 10.2 (0 0 0)	Closing cap	Code 98418
5x	25 30 0 6.8 \	Springs for recessing - 5 pieces	Code 98420
	m 79 2000	Diffuser	Code 98941
	e 15 2009	Diffuser	Code 98942
	e 15 2009	Diffuser - Opaline Diffuser	Code 98943
	e 19 2000	Diffuser Material:PC, colour:black.	Finish Code Black 83132
		Optics Light distribution: medium flood,Cover material: pc	Code C-U100001
17		Diffuser Material:PC, colour:opaline.	Finish Code Opaline C-K200005



g		Diffuser Material:PC, colour:opaline.	Finish Opaline	Code C-K200007
	2	Closing cap - Closing cap Material:PC, colour:white.		Code 98892
**	2	Closing cap Material:PC, colour:black.		Code 83133
		Closing cap Material:plastic, colour:grey.		Code C-V400023
		Closing cap Material:plastic, colour:grey.		Code C-V400027
		Closing cap Material:plastic, colour:grey.		Code C-V400029
	n	Bracket - Mounting bracket L=19mm, H=8mm, D=9mm. Material:Iron, colour:zinc, processing:Washing.		Code 98944
	9 3000	Diffuser		Code 98925



	£ 17	Closing cap	Code 98928
W. T.		Closing cap Material:plastic, colour:grey.	Code C-V400035
		Closing cap Material:ABS Plastic, colour:black.	Code <u>C-V400036</u>
		Closing cap Material:plastic, colour:grey.	Code C-V400025
		Closing cap Material:plastic, colour:grey.	Code C-V400031
	20 3 20 104 5 5 5 5	Closing cap Material:plastic, colour:grey.	Code C-V400033
*	172 3000	Bag / Fixing kit	Code C-K100027
	n 11 2000	Diffuser	Code 98917



