


Silicone 60 LEDs/m



LED Strip | 1 topLED 24 W DC 24 V | 4.8 W/m
470 Lm/m | CRI 90
C0051NDI05019

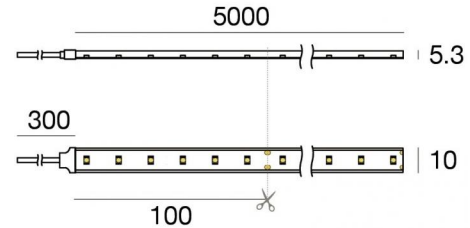

Technical data	
Length	5000 mm
Minimum cut	100 mm
Type	LED Strip
Installation position	Wall lights - Ceiling
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	external
Nominal power	24 W DC
Power / m	4.8 W / m
Source lumens	2350 lm
Source lumens / m	470 lm / m
Input voltage range	24V
CCT / Tone	4000 K
Colour rendering index	90 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP67
Glow wire test	No
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	Yes
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Resin potting	No
Type of light emission	Single emission
Length	5000 mm
Net weight	0.4 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Silicone
Colour	transparent

Electronics

	99331 On/Off Driver 198~264V AC / 176~275V DC 150 W (1 - 6 art.)
	99332 1-10V Controller (1 - 6 art.)
	99374 On/Off Driver 198~264V AC / 176~275V DC 75 W (1 - 3 art.)
	83333 Push and Simply Dim - DALI-2 Controller (1 - 6 art.)
	C-E400002 Push and Simply Dim - DALI-2 Controller (1 - 10 art.)

Silicone 60 LEDs/m



LED Strip | 1 topLED 24 W DC 24 V | 4.8 W/m | 470 Lm/m | CRI 90
C0051NDI05019

Single emission led strip for outdoor application. The natural white LED light source with a diffused light distribution is composed of 300 stripled LEDs with CCT of 4000 K and a CRI 90; the source luminous flux is 2350 lm, with a 97.9 lm/W nominal luminous efficacy.

The device body is made of silicone and features a transparent finish. The ingress protection degree is IP67; the total weight is of 0.4 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 24 W. The power supply cable is included and features.

The device features protection class III and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class F.



Illuminotechnical Features

Source lumens	2350 lm
Colour temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Standard Operating Ambient Temperature	-20 / +45°C

LED Life / Failure Ratio





L70 B50 C0 50000h

Silicone 60 LEDs/m



LED Strip | 1 topLED 24 W DC 24 V | 4.8 W/m | 470 Lm/m | CRI 90
C0051NDI05019

Components

		LUNO_20/27 - Profili Modular	Code <u>C-K100017</u>
		LUNO_20/27 - Profili Modular	Code <u>C-K100018</u>
		Rive_17/16 - Profili Modular	Code <u>C-K100015</u>
		Rive_17/16 - Profili Modular	Code <u>C-K100016</u>
		Cela_18/18 - Profili Modular	Code <u>C-K100019</u>
		Cela_18/18 - Profili Modular	Code <u>C-K100020</u>
		Tabulo_35/14 - Profili Modular	Code <u>C-K100025</u>

Silicone 60 LEDs/m



Silicone 60 LEDs/m | LED Strip | Accessories
C0051NDI05019

	<p>Bracket - Bracket kit for PU_C 5 m and Silicone_C 5 m 10 x brackets, 20 x M3 x 25 screws</p>	<p>Code <u>89223</u></p>
	<p>Bag / Fixing kit - Fixing kit for Silicone_C 5 m 1 x glue, 10 x plugs</p>	<p>Code <u>C-V400002</u></p>
	<p>Diffuser Material:PC, colour:opaline.</p>	<p>Finish Opaline Code <u>C-K200001</u></p>
	<p>Diffuser Material:PC, colour:black.</p>	<p>Finish Black Code <u>C-K200002</u></p>
	<p>Bracket L=9mm, H=8.8mm, D=21.8mm. Material:Iron, colour:translucent, processing:Washing.</p>	<p>Code <u>98931</u></p>
	<p>Diffuser Material:PC, colour:opaline.</p>	<p>Finish Opaline Code <u>C-K200003</u></p>
	<p>Diffuser Material:PC, colour:black.</p>	<p>Finish Black Code <u>C-K200004</u></p>
	<p>Diffuser</p>	<p>Code <u>98898</u></p>

Silicone 60 LEDs/m



Silicone 60 LEDs/m | LED Strip | Accessories
C0051NDI05019

		Diffuser	Code 98899
		Diffuser	Code 98900
		Closing cap	Code 98902
		Bracket L=12mm, H=15mm, D=30mm. Material:PC, colour:white.	Finish White Code 98901
		Closing cap Material:Aluminium, colour:translucent.	Code 98907
		Diffuser Material:PC, colour:black.	Finish Black Code C-K200009
		Closing cap Material:plastic, colour:grey.	Code C-V400041
		Diffuser Diffuser Type: opaline diffuser. Material:PC, colour:opaline.	Finish Opaline Code 98395

Silicone 60 LEDs/m



Silicone 60 LEDs/m | LED Strip | Accessories
C0051NDI05019

		Closing cap	Code <u>98418</u>				
		Springs for recessing - 5 pieces	Code <u>98420</u>				
		Diffuser	Code <u>98941</u>				
		Diffuser	Code <u>98942</u>				
		Diffuser - Opaline Diffuser	Code <u>98943</u>				
		Diffuser Material:PC, colour:black.	<table border="1"> <thead> <tr> <th>Finish</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Black</td> <td>83132</td> </tr> </tbody> </table>	Finish	Code	Black	83132
Finish	Code						
Black	83132						
		Optics Light distribution: medium flood,Cover material: pc	Code <u>C-U100001</u>				
		Diffuser Material:PC, colour:opaline.	<table border="1"> <thead> <tr> <th>Finish</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Opaline</td> <td>C-K200005</td> </tr> </tbody> </table>	Finish	Code	Opaline	C-K200005
Finish	Code						
Opaline	C-K200005						

Silicone 60 LEDs/m



Silicone 60 LEDs/m | LED Strip | Accessories
C0051NDI05019

	<p>Diffuser Material:PC, colour:opaline.</p>	<p>Finish Opaline</p> <p>Code C-K200007</p>
	<p>Closing cap - Closing cap Material:PC, colour:white.</p>	<p>Code 98892</p>
	<p>Closing cap Material:PC, colour:black.</p>	<p>Code 83133</p>
	<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code C-V400023</p>
	<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code C-V400027</p>
	<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code C-V400029</p>
	<p>Bracket - Mounting bracket L=19mm, H=8mm, D=9mm. Material:Iron, colour:zinc, processing:Washing.</p>	<p>Code 98944</p>
	<p>Diffuser</p>	<p>Code 98925</p>

Silicone 60 LEDs/m



Silicone 60 LEDs/m | LED Strip | Accessories
C0051NDI05019

		<p>Closing cap</p>	<p>Code <u>98928</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400035</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400036</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400025</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400031</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400033</u></p>
		<p>Bag / Fixing kit</p>	<p>Code <u>C-K100027</u></p>
		<p>Diffuser</p>	<p>Code <u>98917</u></p>

Silicone 60 LEDs/m




Silicone 60 LEDs/m | LED Strip | Accessories
C0051NDI05019

		<p>Closing cap Material:PC, colour:white.</p>	<p>Code <u>98918</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400037</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400038</u></p>
		<p>Bracket L=22mm, H=21.5mm, D=16.4mm. Material:PC, colour:transparent.</p>	<p>Finish <u>Transp.</u> Code <u>98904</u></p>
		<p>Bag / Fixing kit</p>	<p>Code <u>C-K100028</u></p>
		<p>Bag / Fixing kit</p>	<p>Code <u>C-K100029</u></p>
		<p>Closing cap Material:plastic, colour:grey.</p>	<p>Code <u>C-V400019</u></p>
		<p>Closing cap Material:ABS Plastic, colour:black.</p>	<p>Code <u>C-V400020</u></p>

Silicone 60 LEDs/m




Silicone 60 LEDs/m | LED Strip | Accessories
C0051NDI05019



Closing cap
Material:plastic, colour:grey.

Code
C-V400021



Closing cap
Material:ABS Plastic, colour:black.

Code
C-V400022