


Xenia_W RGBW DMX



Wall Lights - Lines | 85-277 V
36 topLED 12 W DC - 13 W AC | RGBW - 3000
C00527AMVWW

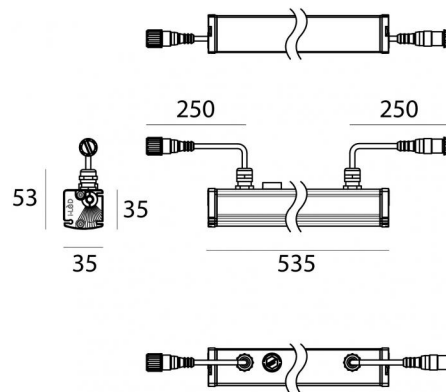

Technical data	
Type	- - Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	Asymmetric Wallwasher
Light emission direction	frontal
Nominal power	12 W DC
Total Power	13 W
Input voltage range	85 - 277 V AC
Frequency	50 - 60 Hz
CCT / Tone	RGBW - 3000 K
C.C. / C.V.	AC
Safety class	2
IP	IP66
IK	IK07
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Control unit/Driver
Dimmable article	DMX-RDM
Directional	Swivelling
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.25 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.7 Kg
Electrostatic discharge protection	Yes
Surge protection	2 KV
Product technological characteristics	TCS

Finishing casing	
Material	Aluminium
Colour	Anodised Aluminum
Processing	15 µm Anodizing

Finishing diffuser	
Material	PMMA
Colour	transparent

Lumen RGBW					
N. Led	Red	Green	Blue	white	
36	108 lm	144 lm	72 lm	252 lm	

Xenia_W RGBW DMX



Wall Lights - Lines | 85-277 V | 36 topLED 12 W DC - 13 W AC | RGBW - 3000

C00527AMVWW

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio

Single emission wall lights or lines for outdoor application. The RGBW - 3000 K LED light source with a asymmetric wallwasher light distribution is composed of 36 topLEDs with CCT of RGB-W 3000 K.

The device body is made of aluminium and features a anodised aluminum finish, processed by means of 15 µm anodizing; the diffuser is made of pmma. The ingress protection degree is IP66; the total weight is of 0.7 kg.

The total absorbed power is 12 W. The power supply cable is included and features a 0.25 m length.








The device features protection class II and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Xenia_W RGBW DMX



Xenia_W RGBW DMX | Lines | Accessories
C00527AMVWW

	<p>Cable and connector Type of cable power + signal cable allinone; Length 5000 mm; insulation double with shielding for signal.</p>	<p>Code <u>C-W200014</u></p>
	<p>Cable and connector Type of cable power + signal cable allinone; Length 500 mm; insulation double with shielding for signal.</p>	<p>Code <u>C-W200015</u></p>
	<p>Cable and connector Type of cable power + signal cable allinone; Length 1500 mm; insulation double with shielding for signal.</p>	<p>Code <u>C-W200016</u></p>
	<p>Cable and connector Type of cable power + signal cable allinone; Length 5000 mm; insulation double with shielding for signal.</p>	<p>Code <u>C-W200017</u></p>
	<p>Connector Type of cable power + signal cable allinone; ; insulation double with shielding for signal.</p>	<p>Code <u>C-W200018</u></p>
	<p>Connector Type of cable power + signal cable allinone; ; insulation double with shielding for signal.</p>	<p>Code <u>C-W200019</u></p>
	<p>Closing cap - Adapter cap for DMX line closure</p>	<p>Code <u>C-W400005</u></p>