




Uplights | 1 arrayLED 12.6 W DC 24/48 V
 RGBW - 3000
C00605SAVWF

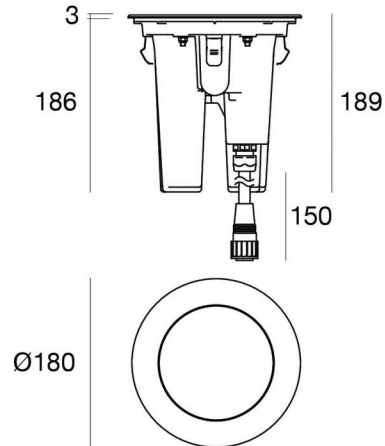

Technical data	
Type	Drive Over
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Wide Flood
Light emission direction	upward
Nominal power	12.6 W DC
CCT / Tone	RGBW - 3000 K
C.C. / C.V.	CV
Safety class	3
IP	IP68
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	No
CE	Yes
Driver included	24/48V converter
Dimmable article	DMX-RDM
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	5000 Kg
Cable included	Yes
Cable length	0.15 m
Resin potting	No
Type of light emission	Single emission
Net weight	3 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	Acquastop

Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	black
Processing	Open pore anodizing + Powder Coating

Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent

Finishing flange

Material	AISI 316 steel
Colour	steel
Processing	Brushing

Lumen RGBW

N. Led	Red	Green	Blue	white
1	228 lm	331 lm	58 lm	262 lm



Uplights | 1 arrayLED 12.6 W DC 24/48 V | RGBW - 3000
C00605SAVWF

Illuminotechnical Features	
Standard Deviation of Colour Matching	5 Step MacAdam
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio	
--------------------------	--

Single emission uplights for outdoor application. The RGBW - 3000 K LED light source with a wide flood light distribution is composed of 1 arrayed LEDs with CCT of RGB-W 3000 K.












The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered. The ingress protection degree is IP68; the total weight is of 3 kg.

The total absorbed power is 12.6 W. The power supply cable is included and features a 0.15 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 83328(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.



		<p>Outer casing installation position: floor, land; type of installation: masonry L=300mm, H=210mm, D=300mm. Material:ABS Plastic, colour:black.</p>	<p>Code <u>83328</u></p>
		<p>Accessories for outer casings - Caseback for outer casing Material:Galvanised Iron, colour:grey, processing:Galvanising.</p>	<p>Code <u>83330</u></p>
<p>L. 1m</p>		<p>Cable and connector Type of cable power + signal cable allinone; Length 1000 mm; insulation double with shielding for signal; external diameter: 12.6 mm; colors: white - blue - red - grey - brown - yellow-green.</p>	<p>Code <u>98660</u></p>
<p>L. 5m</p>		<p>Cable and connector Type of cable power + signal cable allinone; Length 5000 mm; insulation double with shielding for signal; external diameter: 12.6 mm; colors: white - blue - red - grey - brown - yellow-green.</p>	<p>Code <u>98661</u></p>
<p>L. 1m</p>		<p>Cable and connector Type of cable power + signal cable allinone; Length 1000 mm; insulation double with shielding for signal; external diameter: 12.6 mm.</p>	<p>Code <u>98662</u></p>
<p>L. 5m</p>		<p>Cable and connector Type of cable power + signal cable allinone; Length 5000 mm; insulation double with shielding for signal; external diameter: 12.6 mm.</p>	<p>Code <u>98663</u></p>
		<p>Connector - Connector for parallel connections Type of cable power + signal cable allinone; ; insulation double with shielding for signal.</p>	<p>Code <u>C-W400004</u></p>
		<p>Template - Template for cementation (For version with surface mounted flange)</p>	<p>Code <u>83329</u></p>




Suelo_RF | Uplights | Accessories
C00605SAVWF



Connector - Start splitter

Type of cable power + signal cable allinone; Length 5000 + 5000 + 200 mm; insulation double with shielding for signal.

Code
98985



Connector - Continuity splitter

Type of cable power + signal cable allinone; Length 200 + 200 + 5000 mm; insulation double with shielding for signal.

Code
99390



Connector - DMX line closure adapter for ALLinONE cables

Type of cable power + signal cable allinone; ; insulation double with shielding for signal.

Code
98986