


Warp_QJ EVO



Downlights | 1 arrayLED 14 W DC 400 mA | CRI 80
C00701AUAFL

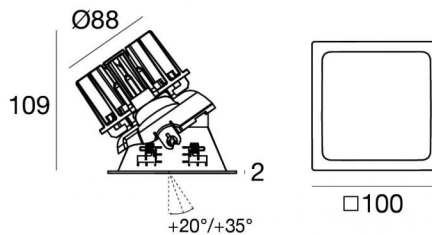

91

Max inclination:
+20° with double panel
+35° with single panel

Technical data

Type	Encasement with flange
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	arrayLED
Optics	Flood
Light emission direction	downward
Nominal power	14 W DC
Source lumens	2007 lm
Input voltage range	400mA
CCT / Tone	2200 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP40
Optical compartment IP	IP65
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	Yes
total angle (horizontal plane)	360 °
total angle (vertical plane)	35 °
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.35 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Technopolymer
Colour	gold
Processing	Coating


Finishing diffuser


Material	UV Resistant Polycarbonate
Colour	transparent

Finishing radiator

Material	Die-cast Aluminium EN AB - 46100
Colour	Aluminium
Processing	Polishing

Electronics

 99734
Multi Power 198~264V AC / 180~275V DC (1 art.)

 99732
1-10V Multi Power 198~264V AC / 180~275V DC (1 art.)

 83322
Push and Simply Dim - DALI-2 Controller



Downlights | 1 arrayLED 14 W DC 400 mA | CRI 80 | Base C00701AUAFL

Single emission recessed downlights for indoor application. The ancient white LED light source with a flood light distribution is composed of 1 arrayed LEDs with CCT of 2200 K and a CRI 80; the source luminous flux is 2007 lm, with a 143.4 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a gold finish, processed by means of coating; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP40; the total weight is of 0.35 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 14 W. The power supply cable is included and features a 0.2 m length.

The device features protection class III and can be ceiling-mounted, with a 91 x 91 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	65 %
Source lumens	2007 lm
Delivered lumens	1309 lm
Consumption	14 W
Luminaire efficacy	93 lm/W
Colour temperature	2200 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature -20 / +50°C	
Ordinary temperature on the glass 40°C	

LED Life / Failure Ratio


L70 B10 C0 252000h (at Tj 65 Ta 25)

UGR

UGR axial	7.7
UGR transversal	7.7
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	21°
Light distribution simmetry	Symmetrical

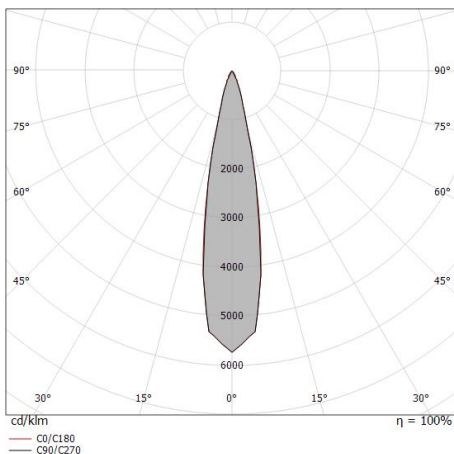

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.19	E(0°) 30062 E(C90) 10.7° 14422 E(C0) 10.9° 14275
1.0	0.38	E(0°) 7516 E(C90) 10.7° 3605 E(C0) 10.9° 3569
1.5	0.57	E(0°) 3340 E(C90) 10.7° 1602 E(C0) 10.9° 1586
2.0	0.76	E(0°) 1879 E(C90) 10.7° 901 E(C0) 10.9° 892
2.5	0.94	E(0°) 1202 E(C90) 10.7° 577 E(C0) 10.9° 571
3.0	1.13	E(0°) 835 E(C90) 10.7° 401 E(C0) 10.9° 397

— C0/C180 (Half-peak divergence: 21.8°)
— C90/C270 (Half-peak divergence: 21.4°)



Diffuser
Diffuser Type: aesthetic filter

Code
83381



Diffuser
Diffuser Type: elliptical filter

Code
83380



Anti-glare
Anti-glare Type: honeycomb louvre.
Material:Pom-C, colour:Black.

Code
83379



Optics - Steel AISI 304L
Light distribution: flood,Cover material: uv resistant polycarbonate

Code
83382



Optics
Light distribution: medium flood,Cover material: uv resistant polycarbonate

Code
83383



Optics
Light distribution: wide flood,Cover material: uv resistant polycarbonate

Code
83384



Warp_QJ EVO white front kit

Code
C-K400095



Warp_QJ EVO black front kit

Code
C-K400096



Warp_QJ EVO gold front kit

Code
C-K400106



Warp_QJ EVO copper front kit

Code
C-K400107