




Ceiling Downlights | 198-264 V  
1 arrayLED 32.5 W DC - 36 W AC | CRI 80  
**C00761WHMML**

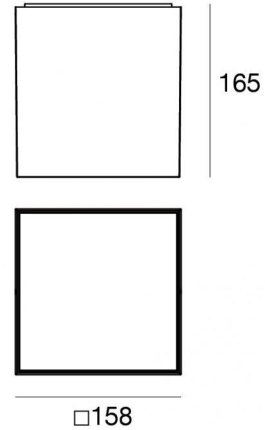

Technical data	
Type	Surface
Installation position	Ceiling
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Medium Flood
Light emission direction	downward
Nominal power	32.5 W DC
Total Power	36 W
Source lumens	4777 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP65
IK	IK07
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI - PUSH DIM
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	3.1 Kg
Electrostatic discharge protection	Yes
Surge protection	1 KV
Optics technology	Honey comb

Finishing casing	
Material	Die-cast Aluminium EN AB - 46100
Colour	White
Processing	Open pore anodizing + Powder Coating
Finishing diffuser	
Material	Extra clear glass
Colour	transparent
Processing	Silk-screening



## Ceiling Downlights | 198-264 V | 1 arrayLED 32.5 W DC - 36 W AC | CRI 80 | Base C00761WHMML


Single emission ceiling downlights for outdoor application. The super warm white LED light source with a medium flood light distribution is composed of 1 arrayed LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 4777 lm, with a 147.0 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a white finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass with a silk-screening treatment. The ingress protection degree is IP65; the total weight is of 3.1 kg.

The total absorbed power is 36 W.

The device features protection class II and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

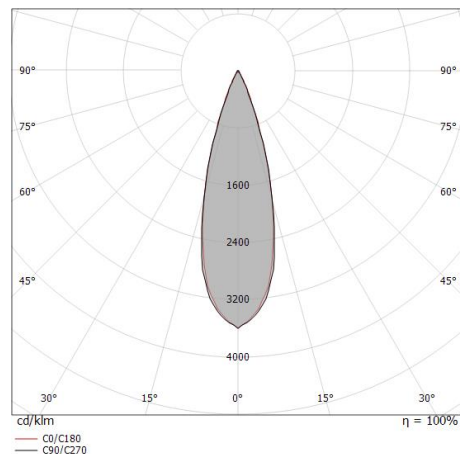

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.27	E(0°) 36020 E(C0) 16265
1.0	0.54	E(0°) 9005 E(C0) 4066
1.5	0.81	E(0°) 4002 E(C0) 1807
2.0	1.08	E(0°) 2251 E(C0) 1017
2.5	1.35	E(0°) 1441 E(C0) 851
3.0	1.62	E(0°) 1001 E(C0) 452

Distance [m] Cone diameter [m] illuminance [lx]  
— C0/C180 (Half-peak divergence: 30.2°)

### Energy efficiency class

This product contains a light source of energy efficiency class E.

### Illuminotechnical Features

Light Output Ratio (LOR)	52 %
Source lumens	4777 lm
Delivered lumens	2505 lm
Consumption	36 W
Luminaire efficacy	69 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25 )

### UGR

UGR axial	8.1
UGR transversal	7.3
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C0/C180 optics	30°
Light distribution simmetry	Symmetrical