


# Periskop80 RGBW



Projectors | 1 x powerLED 8 W DC 630 mA  
 RGBW - 4000  
**C00781GGQUS**

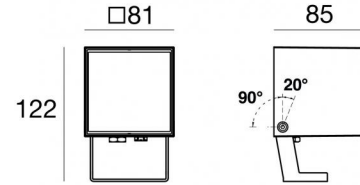

Technical data	
Type	Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Ultra Spot
Light emission direction	frontal
Nominal power	8 W DC
Input voltage range	630mA
CCT / Tone	RGBW - 4000 K
C.C. / C.V.	CC
Safety class	3
IP	IP66
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	No
Directional	Swivelling
total angle (vertical plane)	110 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	No
Type of light emission	Single emission
Net weight	1 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	TCS

## Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	Grey
Processing	Open pore anodizing + Powder Coating

## Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

## Finishing bracket

Material	AISI 304 steel
Colour	Black
Processing	Powder coating

## Electronics



C-E500011  
 DMX-RDM - NFC Multi Channel 4ch. 19~50V DC (1 art.)

## Cables Electrification

Cable connector	No
-----------------	----

## Lumen RGBW

N. Led	Red	Green	Blue	white
1	74 lm	121 lm	21 lm	153 lm

# Periskop80 RGBW



Projectors | 1 x powerLED 8 W DC 630 mA | RGBW - 4000  
**C00781GGQUS**

## Energy efficiency class

This product contains a light source of energy efficiency class G.

Standard Operating Ambient Temperature	-20 / +50°C
--	-------------

Ordinary temperature on the glass	40°C
-----------------------------------	------

## LED Life / Failure Ratio

L70 B10 C0 202460h (at Tj 60 Ta 25 )

Single emission projectors for outdoor application. The RGBW - 4000 K LED light source with a ultra spot light distribution is composed of 1 powerLEDs with CCT of RGB-W 4000 K.

The device body is made of die-cast aluminium en ab - 46100 and features a grey finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP66; the total weight is of 1 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 8 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

# Periskop80 RGBW




Periskop80 RGBW | Projectors | Accessories  
**C00781GGQUS**




Bag / Fixing kit - Belt for installation on tree

**Code**  
99802




Picket  
installation position: land,Cover material: pc

**Code**  
98549




Anti-glare  
Anti-glare Type: eyelid.  
Material:AISI 304 steel, colour:Black, processing:Powder coating.

**Code**  
C-U300023




Anti-glare  
Anti-glare Type: snoot.  
Material:Aluminium 6060, colour:Black, processing:Open pore anodizing + Powder Coating.

**Code**  
C-U300026



RF remote control

**Code**  
C-W600001



Dimmer  
RF Remote controller

**Code**  
C-E700003