


# Periskop160



Projectors | 198-264 V AC / 220-240 V DC  
 1 arrayLED 44 W DC - 48 W AC | CRI 80  
**C00860WHWML**

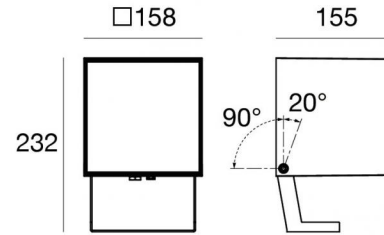

Technical data	
Type	Surface
Installation position	Wall lights - Ceiling - Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	arrayLED
Optics	Medium Flood
Light emission direction	frontal
Nominal power	44 W DC
Total Power	48 W
Source lumens	7642 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	198 - 264 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP66
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI-2 - PUSH DIM
Directional	Swivelling
total angle (vertical plane)	110 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	No
Type of light emission	Single emission
Net weight	3.7 Kg
Electrostatic discharge protection	Yes
Surge protection	2 KV
Optics technology	Honey comb
Product technological characteristics	TCS

## Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	White
Processing	Open pore anodizing + Powder Coating

## Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

## Finishing bracket

Material	AISI 304 steel
Colour	Black
Processing	Powder coating



Projectors | 198-264 V AC /220-240 V DC | 1 arrayLED 44 W DC - 48 W AC | CRI 80 | Base  
**C00860WHWML**


Single emission projectors for outdoor application. The warm white LED light source with a medium flood light distribution is composed of 1 arrayed LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 7642 lm, with a 173.7 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a white finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP66; the total weight is of 3.7 kg.

The total absorbed power is 48 W. The power supply cable is included and features a 1 m length.

The device features protection class II and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

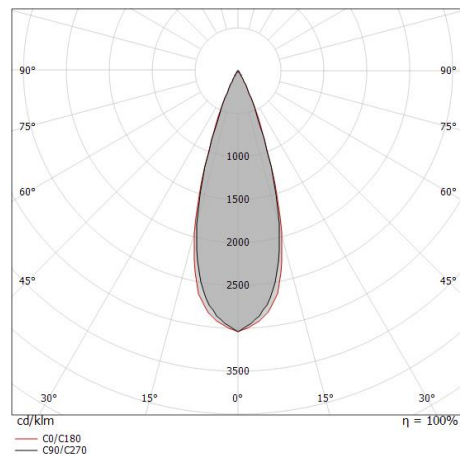

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.30 0.31	E(0°) 48396 E(C90) 16.9° 21256 E(C0) 17.3° 21186
1.0	0.61 0.62	E(0°) 12099 E(C90) 16.9° 5314 E(C0) 17.3° 5296
1.5	0.91 0.93	E(0°) 5377 E(C90) 16.9° 2362 E(C0) 17.3° 2354
2.0	1.22 1.25	E(0°) 3025 E(C90) 16.9° 1329 E(C0) 17.3° 1324
2.5	1.52 1.56	E(0°) 1936 E(C90) 16.9° 850 E(C0) 17.3° 847
3.0	1.82 1.87	E(0°) 1344 E(C90) 16.9° 590 E(C0) 17.3° 588

Distance [m] Cone diameter [m] illuminance [lx]

— C0/C180 (Half-peak divergence: 34.6°)  
 — C90/C270 (Half-peak divergence: 33.8°)

### Energy efficiency class

This product contains a light source of energy efficiency class E.

### Illuminotechnical Features

Light Output Ratio (LOR)	52 %
Source lumens	7642 lm
Delivered lumens	3987 lm
Consumption	48 W
Luminaire efficacy	83 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### LED Life / Failure Ratio


L70 B10 C0 112960h (at Tj 65 Ta 25)

### UGR

UGR axial	6.5
UGR transversal	6.5
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C0/C180 optics	34°
Light distribution simmetry	Symmetrical




Picket  
installation position: land,Cover material: pc

**Code**  
98549




Bag / Fixing kit - Belt for installation on tree

**Code**  
99802




Anti-glare  
Anti-glare Type: eyelid.  
Material:AISI 304 steel, colour:Black, processing:Powder coating.

**Code**  
C-U300025




Anti-glare  
Anti-glare Type: snoot.  
Material:Aluminium 6060, colour:Black, processing:Open pore anodizing + Powder Coating.

**Code**  
C-U300028



Anti-glare  
Anti-glare Type: directional blades.  
Material:Iron, colour:Black, processing:Powder coating.

**Code**  
C-U300032



Diffuser - Diffuser to be mounted in combination with the C-U300032 accessory  
Diffuser Type: elliptical filter

**Code**  
C-U300033