




Uplights | 1 x powerLED 3 W DC 1000 mA | CRI 80  
C01052BSMDI



Technical data	
Type	Frame
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Diffused
Light emission direction	upward
Nominal power	3 W DC
Source lumens	417 lm
Input voltage range	1000mA
CCT / Tone	2700 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP67
IK	IK06
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	2000 Kg
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.174 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	TVS


### Finishing casing


Material	OT58 brass
Colour	Raw Brass


### Finishing base

Material	Stainless steel --
Colour	steel

### Electronics

 C-E100034  
Push and Simply Dim - DALI-2 Controller (4 - 12 art.)

 C-E100033  
On/Off Driver 198~264V AC / 180~280V DC (4 - 12 art.)

 C-E100046  
On/Off Driver 100~264V AC / 176~264V DC (1 - 6 art.)

 C-E100047  
Push and Simply Dim - DALI-2 Controller (1 - 3 art.)

### Cables Electrification

Cable connector	No
-----------------	----



Uplights | 1 x powerLED 3 W DC 1000 mA | CRI 80 | Base  
C01052BSMDI

Single emission uplights for outdoor application. The super warm white LED light source with a diffused light distribution is composed of 1 powered LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 417 lm, with a 139.0 lm/W nominal luminous efficacy.

The device body is made of ot58 brass and features a raw brass finish. The ingress protection degree is IP67; the total weight is of 0.174 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 3 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 84918(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class D.

### Illuminotechnical Features

Light Output Ratio (LOR)	17 %
Source lumens	417 lm
Delivered lumens	71 lm
Consumption	3 W
Luminaire efficacy	23 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	1.5 Step
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### LED Life / Failure Ratio


L70 B10 C0 361980h (at Tj 60 Ta 25 )

### UGR

UGR axial	32.1
UGR transversal	32
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C0/C180 optics	104°
Light distribution simmetry	Symmetrical

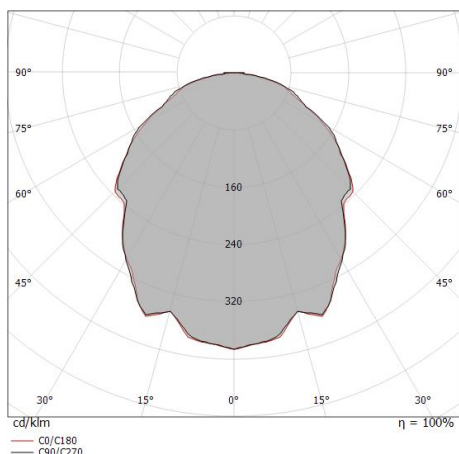

Distance [m]	Cone diameter [m]	illuminance [lx]	E(0°)	E(C90)	E(C0)
0.5	1.28 1.28	109 13 13	51.9°	52.1°	13
1.0	2.55 2.57	27 3 3	51.9°	52.1°	3
1.5	3.83 3.85	12 1 1	51.9°	52.1°	1
2.0	5.10 5.14	7 1 1	51.9°	52.1°	1
2.5	6.38 6.42	4 1 1	51.9°	52.1°	1
3.0	7.65 7.71	3 0 0	51.9°	52.1°	0

Distance [m]      Cone diameter [m]      illuminance [lx]

— C0/C180 (Half-peak divergence: 104.2°)  
— C90/C270 (Half-peak divergence: 103.8°)



Beret\_2R | Uplights | Accessories  
**C01052BSMDI**



Outer casing

installation position: floor, land; type of installation: masonry L=87mm, H=60mm, D=60mm.

Material:ABS Plastic, colour:black.

**Code**

84918