





Uplights | 1 x powerLED 3 W DC 1000 mA | CRI 80  
**C01052BSMFL**



Technical data	
Type	Frame
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Flood
Light emission direction	upward
Nominal power	3 W DC
Source lumens	417 lm
Input voltage range	1000mA
CCT / Tone	2700 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP67
IK	IK06
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	2000 Kg
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.174 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	TVS


### Finishing casing


Material	OT58 brass
Colour	Raw Brass


### Finishing base


Material	Stainless steel --
Colour	steel

### Electronics

	C-E100034 Push and Simply Dim - DALI-2 Controller (4 - 12 art.)
---	--

	C-E100033 On/Off Driver 198~264V AC / 180~280V DC (4 - 12 art.)
---	--

	C-E100046 On/Off Driver 100~264V AC / 176~264V DC (1 - 6 art.)
---	---

	C-E100047 Push and Simply Dim - DALI-2 Controller (1 - 3 art.)
---	---

### Cables Electrification

Cable connector	No
-----------------	----



Uplights | 1 x powerLED 3 W DC 1000 mA | CRI 80 | Base  
C01052BSMFL

Single emission uplights for outdoor application. The super warm white LED light source with a flood light distribution is composed of 1 powered LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 417 lm, with a 139.0 lm/W nominal luminous efficacy.

The device body is made of ot58 brass and features a raw brass finish. The ingress protection degree is IP67; the total weight is of 0.174 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 3 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 84918(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class D.

### Illuminotechnical Features

Light Output Ratio (LOR)	51 %
Source lumens	417 lm
Delivered lumens	215 lm
Consumption	3 W
Luminaire efficacy	71 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	1.5 Step
Colour rendering index	80 Ra

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### LED Life / Failure Ratio


L70 B10 C0 361980h (at Tj 60 Ta 25 )

### UGR

UGR axial	22.5
UGR transversal	22.5
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C0/C180 optics	21°
Light distribution simmetry	Symmetrical

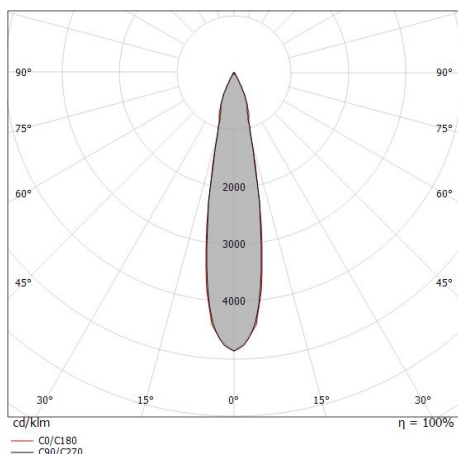

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.19 0.19	E(0°) 4182 E(C90) 2007 E(C0) 1993
1.0	0.37 0.38	E(0°) 1045 E(C90) 502 E(C0) 498
1.5	0.56 0.57	E(0°) 465 E(C90) 223 E(C0) 221
2.0	0.75 0.76	E(0°) 261 E(C90) 125 E(C0) 125
2.5	0.94 0.94	E(0°) 167 E(C90) 80 E(C0) 80
3.0	1.12 1.13	E(0°) 116 E(C90) 56 E(C0) 55

Distance [m] Cone diameter [m] illuminance [lx]

— C0/C180 (Half-peak divergence: 21.4°)  
— C90/C270 (Half-peak divergence: 21.2°)



Beret\_2R | Uplights | Accessories  
**C01052BSMFL**



Outer casing

installation position: floor, land; type of installation: masonry L=87mm, H=60mm, D=60mm.

Material:ABS Plastic, colour:black.

**Code**

84918