




Uplights | 1 x powerLED 3 W DC 1000 mA | CRI 80  
**C01052NKNFL**

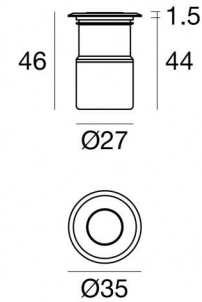

Technical data	
Type	Frame
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Flood
Light emission direction	upward
Nominal power	3 W DC
Source lumens	642 lm
Input voltage range	1000mA
CCT / Tone	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP67
IK	IK06
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	2000 Kg
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.130 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	TVS

### Finishing casing

Material	OT58 brass
Colour	nickel
Processing	Galvanic Nickel Plating + Brushing

### Finishing base

Material	Stainless steel --
Colour	steel

### Electronics

- 
C-E100034  
Push and Simply Dim - DALI-2 Controller (4 - 12 art.)

---

- 
C-E100033  
On/Off Driver 198~264V AC / 180~280V DC (4 - 12 art.)

---

- 
C-E100046  
On/Off Driver 100~264V AC / 176~264V DC (1 - 6 art.)

---

- 
C-E100047  
Push and Simply Dim - DALI-2 Controller (1 - 3 art.)

### Cables Electrification

Cable connector	No
-----------------	----



Uplights | 1 x powerLED 3 W DC 1000 mA | CRI 80 | Base  
C01052NKNFL

Single emission uplights for outdoor application. The natural white LED light source with a flood light distribution is composed of 1 powered LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 642 lm, with a 214.0 lm/W nominal luminous efficacy.

The device body is made of ot58 brass and features a nickel finish, processed by means of galvanic nickel plating + brushing. The ingress protection degree is IP67; the total weight is of 0.130 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 3 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 84918(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class D.

### Illuminotechnical Features

Light Output Ratio (LOR)	37 %
Source lumens	642 lm
Delivered lumens	239 lm
Consumption	3 W
Luminaire efficacy	79 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	1.5 Step
Colour rendering index	80 Ra

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### LED Life / Failure Ratio


L70 B10 C0 361980h (at Tj 60 Ta 25 )

### UGR

UGR axial	22.9
UGR transversal	22.9
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C0/C180 optics	21°
Light distribution simmetry	Symmetrical

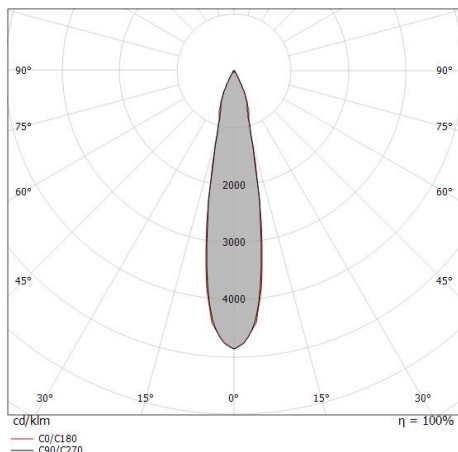

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.19 0.19	E(0°) 4637 E(C90) 2226 E(C0) 2210
1.0	0.37 0.38	E(0°) 1159 E(C90) 556 E(C0) 553
1.5	0.56 0.57	E(0°) 515 E(C90) 247 E(C0) 246
2.0	0.75 0.76	E(0°) 290 E(C90) 139 E(C0) 138
2.5	0.94 0.94	E(0°) 185 E(C90) 89 E(C0) 88
3.0	1.12 1.13	E(0°) 129 E(C90) 62 E(C0) 61

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 21.4°)  
— C90/C270 (Half-peak divergence: 21.2°)



Beret\_2R | Uplights | Accessories  
**C01052NKNFL**



Outer casing

installation position: floor, land; type of installation: masonry L=87mm, H=60mm, D=60mm.

Material:ABS Plastic, colour:black.

**Code**

84918