




Uplights | 1 x powerLED 3 W DC 1000 mA | CRI 80
C01052NKNSP



| Technical data | |
|--|-----------------|
| Type | Frame |
| Installation position | Floor |
| Installation environment | Outdoor |
| Light Source | LED |
| Circuit structure | powerLED |
| Optics | Spot |
| Light emission direction | upward |
| Nominal power | 3 W DC |
| Source lumens | 642 lm |
| Input voltage range | 1000mA |
| CCT / Tone | 4000 K |
| Colour rendering index | 80 Ra |
| C.C. / C.V. | CC |
| Safety class | 3 |
| IP | IP67 |
| IK | IK06 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Driver included | No |
| Dimmable article | DALI - 1-10V |
| Directional | No |
| Tilting | No |
| Walk-over | Yes |
| Drive-over | 2000 Kg |
| Cable included | Yes |
| Cable length | 1 m |
| Resin potting | Yes |
| Type of light emission | Single emission |
| Net weight | 0.130 Kg |
| Electrostatic discharge protection | No |
| Surge protection | No |
| Product technological characteristics | TVS |

Finishing casing

| | |
|------------|------------------------------------|
| Material | OT58 brass |
| Colour | nickel |
| Processing | Galvanic Nickel Plating + Brushing |

Finishing base

| | |
|----------|--------------------|
| Material | Stainless steel -- |
| Colour | steel |

Electronics

| | |
|---|--|
|  | C-E100034 Push and Simply Dim - DALI-2 Controller (4 - 12 art.) |
|  | C-E100033 On/Off Driver 198~264V AC / 180~280V DC (4 - 12 art.) |
|  | C-E100046 On/Off Driver 100~264V AC / 176~264V DC (1 - 6 art.) |
|  | C-E100047 Push and Simply Dim - DALI-2 Controller (1 - 3 art.) |

Cables Electrification

| | |
|-----------------|----|
| Cable connector | No |
|-----------------|----|



Uplights | 1 x powerLED 3 W DC 1000 mA | CRI 80 | Base
C01052NKNSP

Single emission uplights for outdoor application. The natural white LED light source with a spot light distribution is composed of 1 powerLEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 642 lm, with a 214.0 lm/W nominal luminous efficacy.

The device body is made of ot58 brass and features a nickel finish, processed by means of galvanic nickel plating + brushing. The ingress protection degree is IP67; the total weight is of 0.130 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 3 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 84918(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class D.

Illuminotechnical Features

| | |
|---------------------------------------|----------|
| Light Output Ratio (LOR) | 46 % |
| Source lumens | 642 lm |
| Delivered lumens | 299 lm |
| Consumption | 3 W |
| Luminaire efficacy | 99 lm/W |
| Colour temperature | 4000 K |
| Standard Deviation of Colour Matching | 1.5 Step |
| Colour rendering index | 80 Ra |

| | |
|--|-------------|
| Standard Operating Ambient Temperature | -20 / +50°C |
| Ordinary temperature on the glass | 40°C |

LED Life / Failure Ratio


L70 B10 C0 361980h (at Tj 60 Ta 25)

UGR

| | |
|-------------------|----------|
| UGR axial | 14 |
| UGR transversal | 14.1 |
| X=4H Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

OPTICAL

| | |
|-----------------------------|-------------|
| C0/C180 optics | 10° |
| Light distribution simmetry | Symmetrical |

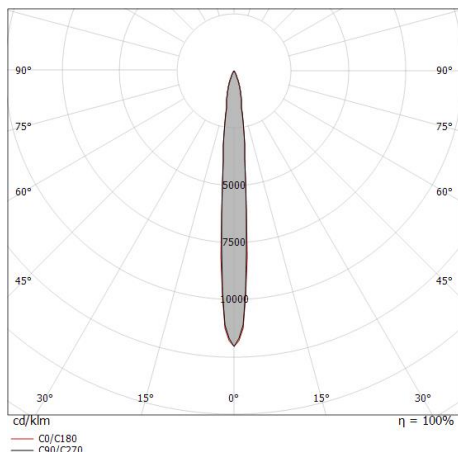

| Distance [m] | Cone diameter [m] | Illuminance [lx] |
|--------------|-------------------|--|
| 0.5 | 0.09 0.09 | E(0°) 14362 E(C90) 5.1° 7134 E(C0) 5.2° 7206 |
| 1.0 | 0.18 0.18 | E(0°) 3591 E(C90) 5.1° 1783 E(C0) 5.2° 1801 |
| 1.5 | 0.27 0.27 | E(0°) 1596 E(C90) 5.1° 793 E(C0) 5.2° 801 |
| 2.0 | 0.36 0.36 | E(0°) 898 E(C90) 5.1° 446 E(C0) 5.2° 450 |
| 2.5 | 0.45 0.46 | E(0°) 574 E(C90) 5.1° 285 E(C0) 5.2° 288 |
| 3.0 | 0.54 0.55 | E(0°) 399 E(C90) 5.1° 198 E(C0) 5.2° 200 |

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 10.4°)
— C90/C270 (Half-peak divergence: 10.2°)



Beret_2R | Uplights | Accessories
C01052NKNSP



Outer casing

installation position: floor, land; type of installation: masonry L=87mm, H=60mm, D=60mm.

Material:ABS Plastic, colour:black.

Code

84918