




Sistemas - Elementos lineales  
264 topLED 20 W DC 24 V | Modular | CRI 90  
**65441W**




67 x  
512 x  
512


| Datos técnicos  |              |
|---|--------------|
| Tipo  | --- Frame    |
| Posición de instalación                                   | Techo        |
| Ambiente de instalación                                   | Interiores   |
| Fuente de luz   | LED          |
| Circuit structure   | topLED       |
| Light emission direction                                  | downward     |
| Potencia nominal  | 20 W DC      |
| Flujo luminoso (fuente)                                   | 2531 lm      |
| Rango de voltaje de entrada                               | 24V          |
| CCT / Tone  | 3000 K       |
| Índice de rendimientos cromático                          | 90 Ra        |
| C.C. / C.V.   | CV           |
| Clase de aislamiento                                      | 3            |
| IP  | IP40         |
| IP vano óptico  | IP54         |
| Test del hilo incandescente                               | 850°         |
| Montaje directo sobre superficies normalmente inflamables | Sí           |
| CE  | Sí           |
| Driver incluido.  | No           |
| Artículo regulable  | DALI - 1-10V |
| Orientabilidad  | No           |
| Basculación   | No           |
| Practicabilidad   | No           |
| Transitabilidad   | No           |
| Cable incluido.   | No           |
| Resinado  | No           |
| Tipología de emisión luminosa                             | Una emisión  |
| Peso neto   | 0.84 Kg      |
| Modularity  | Modular      |
| Protección descargas electrostáticas                      | No           |
| Protección contra sobretensiones                          | No           |
| Tecnología óptica   | Dot free     |


### Acabado cuerpo


|             |                        |
|-------------|------------------------|
| Material    | Aluminio 6060          |
| Color       | Blanco                 |
| Elaboración | Recubrimiento en polvo |


### Electrónica

 99331  
On/Off Driver 198~264V AC / 176~275V DC 150 W (1 - 7 art.)

 99332  
1-10V Controller (1 - 7 art.)

 99374  
On/Off Driver 198~264V AC / 176~275V DC 75 W (1 - 3 art.)

 83333  
Push and Simply Dim - DALI-2 Controller (1 - 7 art.)

 C-E400002  
Push and Simply Dim - DALI-2 Controller (1 - 12 art.)

Sistemas - Elementos lineales | 264 topLED 20 W DC 24 V | Modular | CRI 90 | + 62461+1  
**65441W**


Single emission systems, lines or lines for indoor application. The warm white LED light source is composed of 264 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2531 lm, with a 126.6 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a white finish, processed by means of powder coating. The ingress protection degree is IP40; the total weight is of 0.84 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 20 W.

The device features protection class III and can be ceiling-mounted, with a 67 x 512 x 512 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

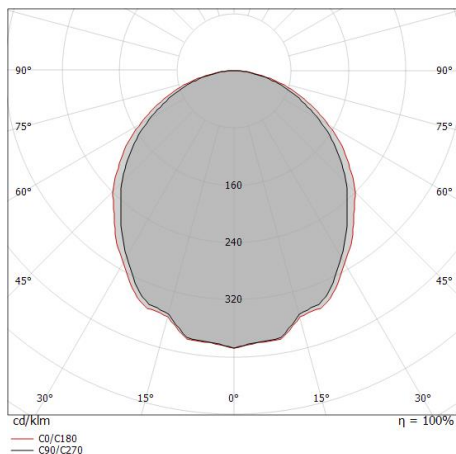

| Distance [m] | Cone diameter [m] | illuminance [lx]                    |
|--------------|-------------------|-------------------------------------|
| 0.5          | 1.19<br>1.33      | E(0°) 761<br>E(C90) 102<br>E(C0) 82 |
| 1.0          | 2.38<br>2.66      | E(0°) 190<br>E(C90) 25<br>E(C0) 21  |
| 1.5          | 3.56<br>4.00      | E(0°) 85<br>E(C90) 11<br>E(C0) 9    |
| 2.0          | 4.75<br>5.33      | E(0°) 48<br>E(C90) 6<br>E(C0) 5     |
| 2.5          | 5.94<br>6.66      | E(0°) 30<br>E(C90) 4<br>E(C0) 3     |
| 3.0          | 7.13<br>7.99      | E(0°) 21<br>E(C90) 3<br>E(C0) 2     |

— C0/C180 (Half-peak divergence: 106.2°)  
 — C90/C270 (Half-peak divergence: 99.8°)

### Clase de eficiencia energética

Este producto contiene 4 fuentes de luz de clase de eficiencia energética E.

### Características Luminotécnicas

|  |                |
|--|----------------|
| Light Output Ratio (LOR)               | 19 %           |
| Flujo luminoso (fuente)                | 2531 lm        |
| Flujo luminoso de luminaria            | 491 lm         |
| Consumption                            | 11 W           |
| Rendimiento luminoso de las luminarias | 44 lm/W        |
| Temperatura de color                   | 3000 K         |
| Standard Deviation of Colour Matching  | 3 Step MacAdam |
| Índice de rendimientos cromático       | 90 Ra          |

|   |             |
|---|-------------|
| Temperatura estándar del ambiente de servicio | -20 / +50°C |
| Temperatura típica sobre el vidrio            | 40°C        |

### LED Life / Failure Ratio

L70 B10 C0 145770h (at Tj 65 Ta 25 )

### UGR

|                   |          |
|-------------------|----------|
| UGR axial         | 21.6     |
| UGR transversal   | 22.2     |
| X=4H   Y=8H       | S=0.25H  |
| Reflection factor | 70/50/20 |

### OPTICAL

|                             |                     |
|-----------------------------|---------------------|
| Óptica C90/C270             | 100°                |
| Óptica C0/C180              | 106°                |
| Light distribution simmetry | Symmetrical 2 assis |

## 65441W

Single emission systems, lines or lines for indoor application. The warm white LED light source is composed of 264 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2531 lm, with a 126.6 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a white finish, processed by means of powder coating. The ingress protection degree is IP40; the total weight is of 0.84 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 20 W.

The device features protection class III and can be ceiling-mounted, with a 67 x 512 x 512 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

### Clase de eficiencia energética

Este producto contiene 4 fuentes de luz de clase de eficiencia energética E.

### Características Luminotécnicas

|  |                |
|--|----------------|
| Light Output Ratio (LOR)               | 19 %           |
| Flujo luminoso (fuente)                | 2531 lm        |
| Flujo luminoso de luminaria            | 491 lm         |
| Consumption                            | 11 W           |
| Rendimiento luminoso de las luminarias | 44 lm/W        |
| Temperatura de color                   | 3000 K         |
| Standard Deviation of Colour Matching  | 3 Step MacAdam |
| Índice de rendimientos cromático       | 90 Ra          |

|   |             |
|---|-------------|
| Temperatura estándar del ambiente de servicio | -20 / +50°C |
| Temperatura típica sobre el vidrio            | 40°C        |

### LED Life / Failure Ratio


L70 B10 C0 145770h (at Tj 65 Ta 25 )

### UGR

|                   |          |
|-------------------|----------|
| UGR axial         | 22.2     |
| UGR transversal   | 21.6     |
| X=4H   Y=8H       | S=0.25H  |
| Reflection factor | 70/50/20 |

### OPTICAL

|                             |                     |
|-----------------------------|---------------------|
| Óptica C90/C270             | 106°                |
| Óptica C0/C180              | 100°                |
| Light distribution symmetry | Symmetrical 2 assis |

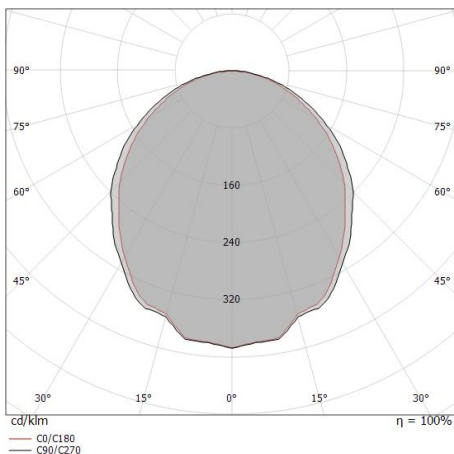

| Distance [m] | Cone diameter [m] | illuminance [lx]                    |
|--------------|-------------------|-------------------------------------|
| 0.5          | 1.33<br>1.19      | E(0°) 761<br>E(C90) 82<br>E(C0) 102 |
| 1.0          | 2.66<br>2.38      | E(0°) 190<br>E(C90) 21<br>E(C0) 25  |
| 1.5          | 4.00<br>3.56      | E(0°) 85<br>E(C90) 9<br>E(C0) 11    |
| 2.0          | 5.33<br>4.75      | E(0°) 48<br>E(C90) 5<br>E(C0) 6     |
| 2.5          | 6.66<br>5.94      | E(0°) 30<br>E(C90) 3<br>E(C0) 4     |
| 3.0          | 7.99<br>7.13      | E(0°) 21<br>E(C90) 2<br>E(C0) 3     |

Distance [m] Cone diameter [m] illuminance [lx]

— C0/C180 (Half-peak divergence: 99.8°)  
- - C90/C270 (Half-peak divergence: 106.2°)

Sistemas - Elementos lineales | 264 topLED 20 W DC 24 V | Modular | CRI 90 | + 62464+1

**65441W**

Single emission systems, lines or lines for indoor application. The warm white LED light source is composed of 264 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2531 lm, with a 126.6 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a white finish, processed by means of powder coating. The ingress protection degree is IP40; the total weight is of 0.84 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 20 W.

The device features protection class III and can be ceiling-mounted, with a 67 x 512 x 512 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

### Clase de eficiencia energética

Este producto contiene 4 fuentes de luz de clase de eficiencia energética E.

### Características Luminotécnicas

|  |                |
|--|----------------|
| Light Output Ratio (LOR)               | 15 %           |
| Flujo luminoso (fuente)                | 2531 lm        |
| Flujo luminoso de luminaria            | 398 lm         |
| Consumption                            | 11 W           |
| Rendimiento luminoso de las luminarias | 36 lm/W        |
| Temperatura de color                   | 3000 K         |
| Standard Deviation of Colour Matching  | 3 Step MacAdam |
| Índice de rendimientos cromático       | 90 Ra          |

|   |             |
|---|-------------|
| Temperatura estándar del ambiente de servicio | -20 / +50°C |
| Temperatura típica sobre el vidrio            | 40°C        |

### LED Life / Failure Ratio


L70 B10 C0 145770h (at Tj 65 Ta 25 )

### UGR

|                   |          |
|-------------------|----------|
| UGR axial         | 17       |
| UGR transversal   | 17.8     |
| X=4H   Y=8H       | S=0.25H  |
| Reflection factor | 70/50/20 |

### OPTICAL

|                             |                     |
|-----------------------------|---------------------|
| Óptica C90/C270             | 72°                 |
| Óptica C0/C180              | 78°                 |
| Light distribution symmetry | Symmetrical 2 assis |

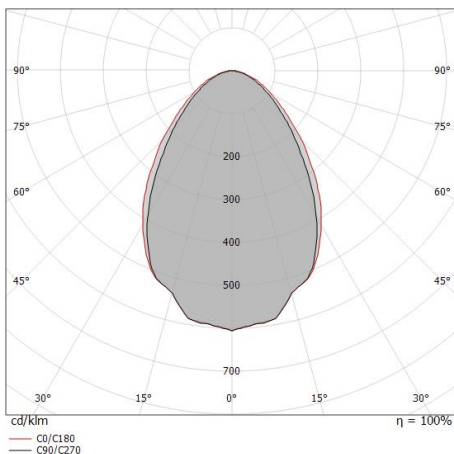

| Distance [m] | Cone diameter [m] | illuminance [lx]                     |
|--------------|-------------------|--------------------------------------|
| 0.5          | 0.73<br>0.81      | E(0°) 962<br>E(C90) 254<br>E(C0) 227 |
| 1.0          | 1.46<br>1.61      | E(0°) 240<br>E(C90) 64<br>E(C0) 57   |
| 1.5          | 2.19<br>2.42      | E(0°) 107<br>E(C90) 28<br>E(C0) 25   |
| 2.0          | 2.92<br>3.23      | E(0°) 60<br>E(C90) 16<br>E(C0) 14    |
| 2.5          | 3.65<br>4.03      | E(0°) 38<br>E(C90) 10<br>E(C0) 9     |
| 3.0          | 4.38<br>4.84      | E(0°) 27<br>E(C90) 7<br>E(C0) 6      |

— C0/C180 (Half-peak divergence: 77.8°)  
— C90/C270 (Half-peak divergence: 72.2°)

Sistemas - Elementos lineales | 264 topLED 20 W DC 24 V | Modular | CRI 90 | + 62464+2

**65441W**


Single emission systems, lines or lines for indoor application. The warm white LED light source is composed of 264 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2531 lm, with a 126.6 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a white finish, processed by means of powder coating. The ingress protection degree is IP40; the total weight is of 0.84 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 20 W.

The device features protection class III and can be ceiling-mounted, with a 67 x 512 x 512 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

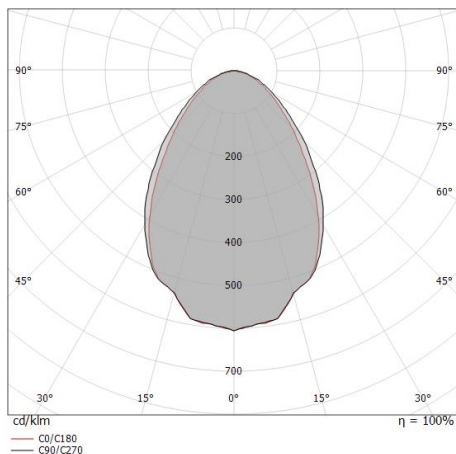

| Distance [m] | Cone diameter [m] | illuminance [lx]                     |
|--------------|-------------------|--------------------------------------|
| 0.5          | 0.81<br>0.73      | E(0°) 962<br>E(C90) 227<br>E(C0) 254 |
| 1.0          | 1.61<br>1.46      | E(0°) 240<br>E(C90) 57<br>E(C0) 64   |
| 1.5          | 2.42<br>2.19      | E(0°) 107<br>E(C90) 25<br>E(C0) 28   |
| 2.0          | 3.23<br>2.92      | E(0°) 60<br>E(C90) 14<br>E(C0) 16    |
| 2.5          | 4.03<br>3.65      | E(0°) 38<br>E(C90) 9<br>E(C0) 10     |
| 3.0          | 4.84<br>4.38      | E(0°) 27<br>E(C90) 6<br>E(C0) 7      |

— C0/C180 (Half-peak divergence: 72.2°)  
— C90/C270 (Half-peak divergence: 77.8°)

### Clase de eficiencia energética

Este producto contiene 4 fuentes de luz de clase de eficiencia energética E.

### Características Luminotécnicas

|  |                |
|--|----------------|
| Light Output Ratio (LOR)               | 15 %           |
| Flujo luminoso (fuente)                | 2531 lm        |
| Flujo luminoso de luminaria            | 398 lm         |
| Consumption                            | 11 W           |
| Rendimiento luminoso de las luminarias | 36 lm/W        |
| Temperatura de color                   | 3000 K         |
| Standard Deviation of Colour Matching  | 3 Step MacAdam |
| Índice de rendimientos cromático       | 90 Ra          |

|   |             |
|---|-------------|
| Temperatura estándar del ambiente de servicio | -20 / +50°C |
| Temperatura típica sobre el vidrio            | 40°C        |

### LED Life / Failure Ratio

L70 B10 C0 145770h (at Tj 65 Ta 25 )

### UGR

|                   |          |
|-------------------|----------|
| UGR axial         | 17.8     |
| UGR transversal   | 17       |
| X=4H   Y=8H       | S=0.25H  |
| Reflection factor | 70/50/20 |

### OPTICAL

|                             |                     |
|-----------------------------|---------------------|
| Óptica C90/C270             | 78°                 |
| Óptica C0/C180              | 72°                 |
| Light distribution simmetry | Symmetrical 2 assis |

Sistemas - Elementos lineales | 264 topLED 20 W DC 24 V | Modular | CRI 90 | + 83356+1

**65441W**


Single emission systems, lines or lines for indoor application. The warm white LED light source is composed of 264 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2531 lm, with a 126.6 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a white finish, processed by means of powder coating. The ingress protection degree is IP40; the total weight is of 0.84 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 20 W.

The device features protection class III and can be ceiling-mounted, with a 67 x 512 x 512 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

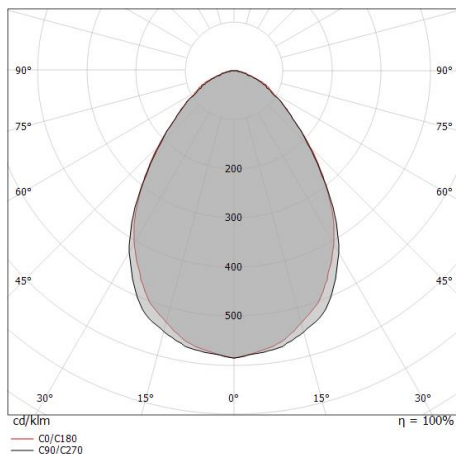

| Distance [m] | Cone diameter [m] | illuminance [lx]                      |
|--------------|-------------------|---------------------------------------|
| 0.5          | 0.82<br>0.81      | E(0°) 1250<br>E(C90) 291<br>E(C0) 293 |
| 1.0          | 1.63<br>1.63      | E(0°) 313<br>E(C90) 73<br>E(C0) 73    |
| 1.5          | 2.45<br>2.44      | E(0°) 139<br>E(C90) 32<br>E(C0) 33    |
| 2.0          | 3.26<br>3.25      | E(0°) 78<br>E(C90) 18<br>E(C0) 18     |
| 2.5          | 4.08<br>4.06      | E(0°) 50<br>E(C90) 12<br>E(C0) 12     |
| 3.0          | 4.89<br>4.88      | E(0°) 35<br>E(C90) 8<br>E(C0) 8       |

— C0/C180 (Half-peak divergence: 78.2°)  
- - C90/C270 (Half-peak divergence: 78.4°)

### Clase de eficiencia energética

Este producto contiene 4 fuentes de luz de clase de eficiencia energética E.

### Características Luminotécnicas

|  |                |
|--|----------------|
| Light Output Ratio (LOR)               | 21 %           |
| Flujo luminoso (fuente)                | 2531 lm        |
| Flujo luminoso de luminaria            | 533 lm         |
| Consumption                            | 10 W           |
| Rendimiento luminoso de las luminarias | 53 lm/W        |
| Temperatura de color                   | 3000 K         |
| Standard Deviation of Colour Matching  | 3 Step MacAdam |
| Índice de rendimientos cromático       | 90 Ra          |

|   |             |
|---|-------------|
| Temperatura estándar del ambiente de servicio | -20 / +50°C |
| Temperatura típica sobre el vidrio            | 40°C        |

### LED Life / Failure Ratio

L70 B10 C0 145770h (at Tj 65 Ta 25 )

### UGR

|                   |          |
|-------------------|----------|
| UGR axial         | 17.8     |
| UGR transversal   | 18.1     |
| X=4H   Y=8H       | S=0.25H  |
| Reflection factor | 70/50/20 |

### OPTICAL

|                             |             |
|-----------------------------|-------------|
| Óptica C0/C180              | 78°         |
| Light distribution simmetry | Symmetrical |

## 65441W


Single emission systems, lines or lines for indoor application. The warm white LED light source is composed of 264 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2531 lm, with a 126.6 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a white finish, processed by means of powder coating. The ingress protection degree is IP40; the total weight is of 0.84 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 20 W.

The device features protection class III and can be ceiling-mounted, with a 67 x 512 x 512 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

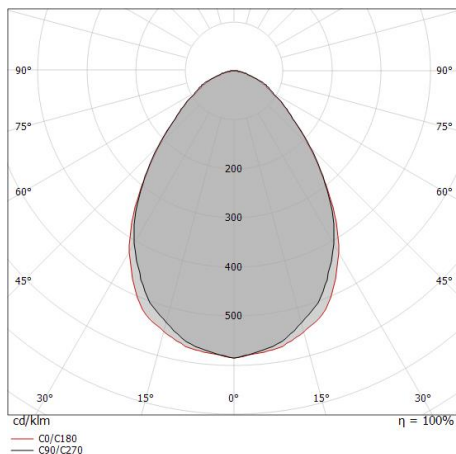

### Clase de eficiencia energética

Este producto contiene 4 fuentes de luz de clase de eficiencia energética E.

### Características Luminotécnicas

|  |                |
|--|----------------|
| Light Output Ratio (LOR)               | 21 %           |
| Flujo luminoso (fuente)                | 2531 lm        |
| Flujo luminoso de luminaria            | 533 lm         |
| Consumption                            | 10 W           |
| Rendimiento luminoso de las luminarias | 53 lm/W        |
| Temperatura de color                   | 3000 K         |
| Standard Deviation of Colour Matching  | 3 Step MacAdam |
| Índice de rendimientos cromático       | 90 Ra          |

|   |             |
|---|-------------|
| Temperatura estándar del ambiente de servicio | -20 / +50°C |
| Temperatura típica sobre el vidrio            | 40°C        |

### LED Life / Failure Ratio

L70 B10 C0 145770h (at Tj 65 Ta 25 )

### UGR

|                   |          |
|-------------------|----------|
| UGR axial         | 17.8     |
| UGR transversal   | 18.1     |
| X=4H   Y=8H       | S=0.25H  |
| Reflection factor | 70/50/20 |

### OPTICAL

|                             |             |
|-----------------------------|-------------|
| Óptica C0/C180              | 78°         |
| Light distribution simmetry | Symmetrical |

## 65441W


Single emission systems, lines or lines for indoor application. The warm white LED light source is composed of 264 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2531 lm, with a 126.6 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a white finish, processed by means of powder coating. The ingress protection degree is IP40; the total weight is of 0.84 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 20 W.

The device features protection class III and can be ceiling-mounted, with a 67 x 512 x 512 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

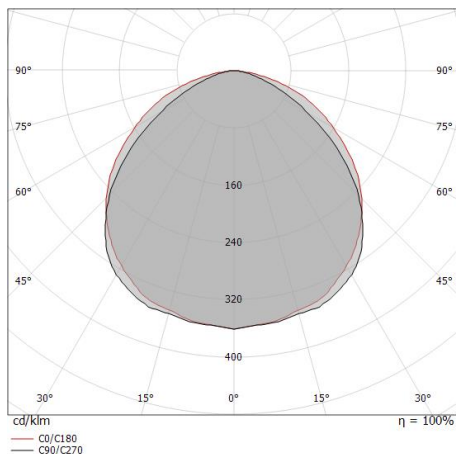

| Distance [m] | Cone diameter [m] | illuminance [lx]                   |
|--------------|-------------------|------------------------------------|
| 0.5          | 1.33<br>1.53      | E(0°) 868<br>E(C90) 95<br>E(C0) 72 |
| 1.0          | 2.65<br>3.06      | E(0°) 217<br>E(C90) 24<br>E(C0) 18 |
| 1.5          | 3.98<br>4.58      | E(0°) 96<br>E(C90) 11<br>E(C0) 8   |
| 2.0          | 5.31<br>6.11      | E(0°) 54<br>E(C90) 6<br>E(C0) 4    |
| 2.5          | 6.64<br>7.64      | E(0°) 35<br>E(C90) 4<br>E(C0) 3    |
| 3.0          | 7.96<br>9.17      | E(0°) 24<br>E(C90) 3<br>E(C0) 2    |

— C0/C180 (Half-peak divergence: 113.6°)  
— C90/C270 (Half-peak divergence: 106.0°)

### Clase de eficiencia energética

Este producto contiene 4 fuentes de luz de clase de eficiencia energética E.

### Características Luminotécnicas

|  |                |
|--|----------------|
| Light Output Ratio (LOR)               | 23 %           |
| Flujo luminoso (fuente)                | 2531 lm        |
| Flujo luminoso de luminaria            | 602 lm         |
| Consumption                            | 10 W           |
| Rendimiento luminoso de las luminarias | 60 lm/W        |
| Temperatura de color                   | 3000 K         |
| Standard Deviation of Colour Matching  | 3 Step MacAdam |
| Índice de rendimientos cromático       | 90 Ra          |

Temperatura estándar del ambiente de servicio -20 / +50°C

Temperatura típica sobre el vidrio 40°C

### LED Life / Failure Ratio

L70 B10 C0 145770h (at Tj 65 Ta 25 )

### UGR

|                   |          |
|-------------------|----------|
| UGR axial         | 20.5     |
| UGR transversal   | 22.8     |
| X=4H   Y=8H       | S=0.25H  |
| Reflection factor | 70/50/20 |

### OPTICAL

|                             |                     |
|-----------------------------|---------------------|
| Óptica C90/C270             | 106°                |
| Óptica C0/C180              | 114°                |
| Light distribution simmetry | Symmetrical 2 assis |



## 65441W


Single emission systems, lines or lines for indoor application. The warm white LED light source is composed of 264 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2531 lm, with a 126.6 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a white finish, processed by means of powder coating. The ingress protection degree is IP40; the total weight is of 0.84 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 20 W.

The device features protection class III and can be ceiling-mounted, with a 67 x 512 x 512 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

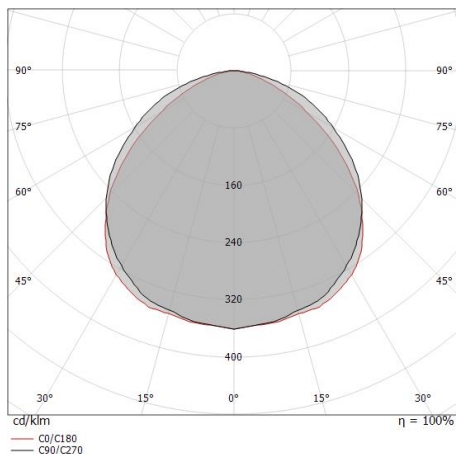

### Clase de eficiencia energética

Este producto contiene 4 fuentes de luz de clase de eficiencia energética E.

### Características Luminotécnicas

|  |                |
|--|----------------|
| Light Output Ratio (LOR)               | 23 %           |
| Flujo luminoso (fuente)                | 2531 lm        |
| Flujo luminoso de luminaria            | 602 lm         |
| Consumption                            | 10 W           |
| Rendimiento luminoso de las luminarias | 60 lm/W        |
| Temperatura de color                   | 3000 K         |
| Standard Deviation of Colour Matching  | 3 Step MacAdam |
| Índice de rendimientos cromático       | 90 Ra          |

Temperatura estándar del ambiente de servicio -20 / +50°C

Temperatura típica sobre el vidrio 40°C

### LED Life / Failure Ratio

L70 B10 C0 145770h (at Tj 65 Ta 25 )

### UGR

|                   |          |
|-------------------|----------|
| UGR axial         | 20.5     |
| UGR transversal   | 22.8     |
| X=4H   Y=8H       | S=0.25H  |
| Reflection factor | 70/50/20 |

### OPTICAL

|                             |                     |
|-----------------------------|---------------------|
| Óptica C90/C270             | 114°                |
| Óptica C0/C180              | 106°                |
| Light distribution simmetry | Symmetrical 2 assis |



|  |  |   |                                      |
|--|--|---|--------------------------------------|
|  |  | <p>Tapón - Cristal de cuarzo<br/>           Material:Aluminio fundido EN AB - 46100, color:Blanco, elaboración :Recubrimiento en polvo.</p>                                 | <p><b>Code</b><br/> <u>62460</u></p> |
|  |  | <p>Difusor<br/>           Tipo de difusor: difusore satinato anti glare - all white.<br/>           Material:Polimetilmetacrilato Resistente UV, elaboración :Satinado.</p> | <p><b>Code</b><br/> <u>83356</u></p> |
|  |  | <p>Difusor<br/>           Tipo de difusor: difusore satinato anti glare - all white.<br/>           Material:Polimetilmetacrilato Resistente UV, elaboración :Satinado.</p> | <p><b>Code</b><br/> <u>83357</u></p> |
|  |  | <p>Difusor<br/>           Tipo de difusor: difusore satinato - all white.<br/>           Material:Polimetilmetacrilato Resistente UV, elaboración :Satinado.</p>            | <p><b>Code</b><br/> <u>83407</u></p> |
|  |  | <p>Difusor<br/>           Tipo de difusor: difusore satinato - all white.<br/>           Material:Polimetilmetacrilato Resistente UV, elaboración :Satinado.</p>            | <p><b>Code</b><br/> <u>83408</u></p> |
|  |  | <p>Difusor<br/>           Tipo de difusor: difusore satinato - all white.<br/>           Material:Polimetilmetacrilato Resistente UV, elaboración :Satinado.</p>            | <p><b>Code</b><br/> <u>83409</u></p> |