

Uplights | 1 arrayLED 9 W DC 24 V | CRI 80
77321M30

Single emission uplights for outdoor application. The super warm white LED light source with a flood light distribution is composed of 1 arrayed LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 1080 lm, with a 120.0 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 0.65 kg.

The total absorbed power is 9 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code C-C100003(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Clase de eficiencia energética

Este producto contiene una fuente de luz de clase de eficiencia energética F.

Características Luminotécnicas

Light Output Ratio (LOR)	56 %
Flujo luminoso (fuente)	1080 lm
Flujo luminoso de luminaria	614 lm
Consumption	9 W
Rendimiento luminoso de las luminarias	68 lm/W
Temperatura de color	2700 K
Standard Deviation of Colour Matching	2 Step MacAdam
Índice de rendimientos cromático	80 Ra
Black Body Locus	On

Temperatura estándar del ambiente de servicio	-20 / +50°C
Temperatura típica sobre el vidrio	50°C

LED Life / Failure Ratio


L70 B10 C0 252000h (at Tj 65 Ta 25)

UGR

UGR axial	7.3
UGR transversal	7.2
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL


Óptica C0/C180	23°
Light distribution simmetry	Symmetrical

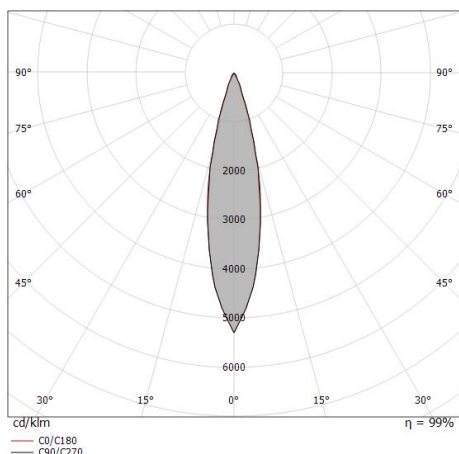

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	0.20 0.21	13029	6180	6169	
1.0	0.41 0.41	3257	1545	1542	
1.5	0.61 0.62	1448	867	865	
2.0	0.81 0.82	814	386	386	
2.5	1.02 1.03	521	247	247	
3.0	1.22 1.23	362	172	171	

— C0/C180 (Half-peak divergence: 23.2°)
— C90/C270 (Half-peak divergence: 23.0°)

COLOR VECTOR GRAPHIC

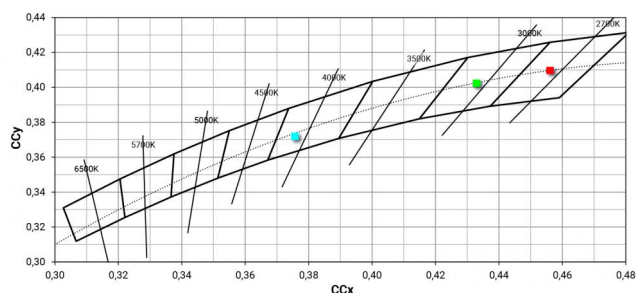



Orma_QFJ | Uplights | Accessories
77321M30



Herramienta - Ventosa para extracción de producto
Material:plástico, color:naranja, elaboración :Pintura.

Code
83235



Caja de empotrar
posición de instalación: piso; tipo instalación: albañilería L=114mm, H=93mm, D=114mm.
Material:Plástico ABS, color:negro.

Code
C-C100003