





Uplights | 198-264 V | 1 x powerLED 8 W DC - 9 W AC | CRI 80  
80557N06

Single emission uplights for outdoor application. The natural white LED light source with a ultra spot light distribution is composed of 1 poweredLEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 1013 lm, with a 126.6 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered. The ingress protection degree is IP68; the total weight is of 0.780 kg.

The total absorbed power is 9 W. The power supply cable is included and features a 1 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 98122(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Clase de eficiencia energética

Este producto contiene una fuente de luz de clase de eficiencia energética E.

### Características Luminotécnicas

Light Output Ratio (LOR)	50 %
Flujo luminoso (fuente)	1013 lm
Flujo luminoso de luminaria	507 lm
Consumption	9 W
Rendimiento luminoso de las luminarias	56 lm/W
Temperatura de color	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Índice de rendimientos cromático	80 Ra

Temperatura estándar del ambiente de servicio	-20 / +50°C
Temperatura típica sobre el vidrio	40°C

### LED Life / Failure Ratio


L70 B10 C0 247450h (at Tj 60 Ta 25 )

### UGR

UGR axial	10.7
UGR transversal	10.4
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

Óptica C0/C180	9°
Light distribution simmetry	Symmetrical

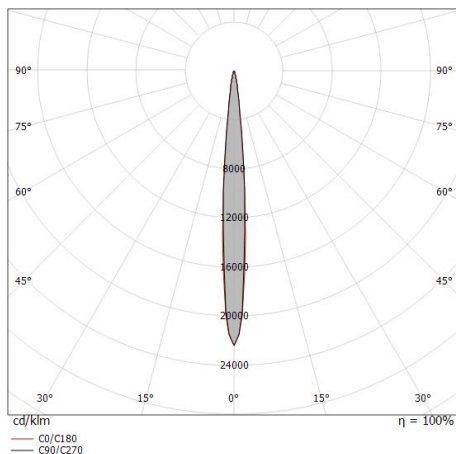

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.08 0.08	E(0°) 45518 E(C90) 4.5° 22763 E(C0) 4.6° 23136
1.0	0.16 0.16	E(0°) 11379 E(C90) 4.5° 5691 E(C0) 4.6° 5784
1.5	0.24 0.24	E(0°) 5058 E(C90) 4.5° 2529 E(C0) 4.6° 2571
2.0	0.31 0.32	E(0°) 2845 E(C90) 4.5° 1423 E(C0) 4.6° 1446
2.5	0.39 0.40	E(0°) 1821 E(C90) 4.5° 911 E(C0) 4.6° 925
3.0	0.47 0.48	E(0°) 1264 E(C90) 4.5° 632 E(C0) 4.6° 643



Suelo\_RX | Uplights | Accessories  
**80557N06**



Caja de empotrar

posición de instalación: piso; tipo instalación: albañilería L=110mm, H=220mm, D=110mm.

Material:Plástico ABS, color:negro.

**Code**

98122