





Downlights | 198-264 V | 1 arrayLED 7.2 W DC - 8.5 W AC | CRI 80  
81895N30

Single emission recessed downlights for outdoor application. The natural white LED light source with a medium flood light distribution is composed of 1 arrayled LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 1114 lm, with a 154.7 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered. The ingress protection degree is IP67; the total weight is of 1 kg.

The total absorbed power is 8.5 W. The power supply cable is included and features a 1 m length.

The device features protection class I and can be ceiling-mounted, with a 96 mm diameter hole (in plasterboard) with an outer casing, code 99673(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Clase de eficiencia energética

Este producto contiene una fuente de luz de clase de eficiencia energética E.

### Características Luminotécnicas

Light Output Ratio (LOR)	54 %
Flujo luminoso (fuente)	1114 lm
Flujo luminoso de luminaria	604 lm
Consumption	8.5 W
Rendimiento luminoso de las luminarias	71 lm/W
Temperatura de color	4000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Índice de rendimientos cromático	80 Ra

Temperatura estándar del ambiente de servicio	-20 / +50°C
Temperatura típica sobre el vidrio	40°C

### LED Life / Failure Ratio


L70 B10 C0 252000h (at Tj 65 Ta 25 )

### UGR

UGR axial	19.4
UGR transversal	19.4
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

Óptica C0/C180	30°
Light distribution simmetry	Symmetrical

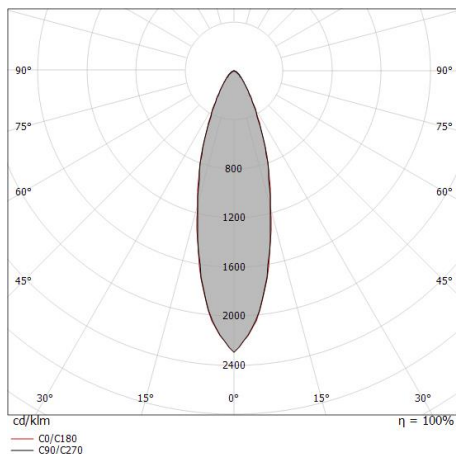


Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.27 0.27	E(0°) 5539 E(C90) 2503 E(C0) 2507
1.0	0.53 0.54	E(0°) 1385 E(C90) 626 E(C0) 627
1.5	0.80 0.80	E(0°) 615 E(C90) 278 E(C0) 279
2.0	1.06 1.07	E(0°) 346 E(C90) 156 E(C0) 157
2.5	1.33 1.34	E(0°) 222 E(C90) 100 E(C0) 100
3.0	1.60 1.61	E(0°) 154 E(C90) 70 E(C0) 70

Distance [m] Cone diameter [m] illuminance [lx]

— C0/C180 (Half-peak divergence: 30.0°)  
— C90/C270 (Half-peak divergence: 29.8°)



Guardian\_J | Downlights | Accessories  
**81895N30**



Caja de empotrar

posición de instalación: techo; tipo instalación: albañilería .

Material:Gris.

**Code**

99673