



Elementos lineales | 198-264 V | 9 x powerLED 19.8 W DC - 22 W AC | CRI 80  
**82304N27**

Single emission lines for outdoor application. The natural white LED light source with a asymmetric wallwasher light distribution is composed of 9 powerLED LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 2898 lm, with a 146.4 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised black finish, processed by means of 15 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 2.8 kg.

The total absorbed power is 22 W. The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 98725(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Clase de eficiencia energética

Este producto contiene 2 fuentes de luz de clase de eficiencia energética D.


### Características Luminotécnicas

|  |          |
|--|----------|
| Light Output Ratio (LOR)               | 65 %     |
| Flujo luminoso (fuente)                | 2898 lm  |
| Flujo luminoso de luminaria            | 1894 lm  |
| Consumption                            | 22 W     |
| Rendimiento luminoso de las luminarias | 86 lm/W  |
| Temperatura de color                   | 4000 K   |
| Standard Deviation of Colour Matching  | 1.5 Step |
| Índice de rendimientos cromático       | 80 Ra    |

|   |             |
|---|-------------|
| Temperatura estándar del ambiente de servicio | -20 / +50°C |
| Temperatura típica sobre el vidrio            | 40°C        |

### LED Life / Failure Ratio

L70 B10 C0 361980h (at Tj 60 Ta 25 )

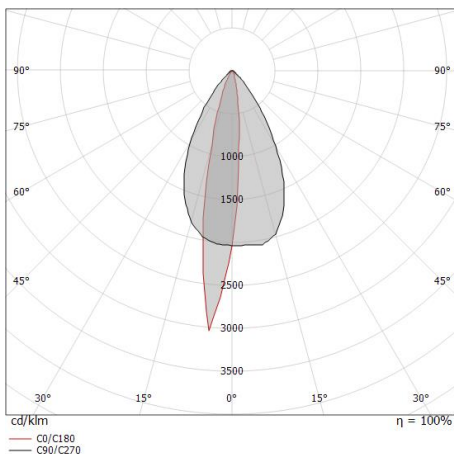



|  |   |   |  |
|--|---|---|--|
|  | <p>Cable y conector<br/>                     Largo 2000 mm; aislamiento doppio; sección 1.5 mm<sup>2</sup>; prensacable: no; diámetro externo: 9.5 mm; colores: azul - marrón - amarillo-verde.</p> | <p><b>Code</b><br/> <u>99057</u></p>  |  |
|  | <p>Cable y conector<br/>                     Largo 5000 mm; aislamiento doppio; sección 1.5 mm<sup>2</sup>; prensacable: no; diámetro externo: 9.5 mm; colores: azul - marrón - amarillo-verde.</p> | <p><b>Code</b><br/> <u>98147</u></p>  |  |
|  |   | <p>Cable y conector<br/>                     Largo 10000 mm; aislamiento doppio; sección 1.5 mm<sup>2</sup>; prensacable: no; diámetro externo: 9.5 mm; colores: azul - marrón - amarillo-verde.</p>  | <p><b>Code</b><br/> <u>98146</u></p>   |
|  |   | <p>Caja de empotrar<br/>                     posición de instalación: piso; tipo instalación: albañilería L=511mm, H=140mm, D=75mm.<br/>                     Material:Aluminio 6060, color:Negro anodizado, elaboración :Anodizado 15 µm.</p> | <p><b>Finish</b><br/> <span style="background-color: black; color: black;">██████████</span> <b>Code</b><br/> <u>98725</u></p> |
|  | <p>Llave</p>  | <p><b>Code</b><br/> <u>98957</u></p>  |  |