

Uplights | 1 x powerLED 5 W DC 24 V | CRI 80 82664N60


Single emission uplights for outdoor application. The natural white LED light source with a wide flood light distribution is composed of 1 powered LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 529 lm, with a 105.8 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP68; the total weight is of 0.2 kg.

The total absorbed power is 5 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 83038(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

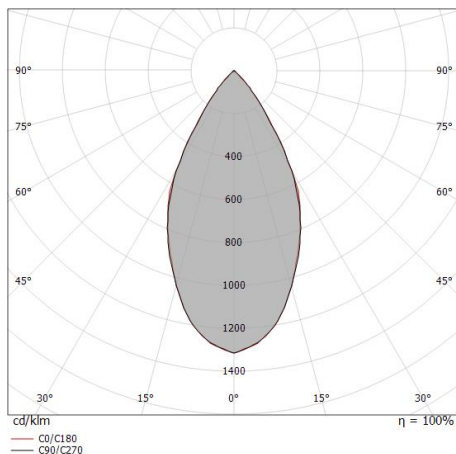

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.51 0.52	E(0°) 1604 E(C90) 571 E(C0) 562
1.0	1.01 1.04	E(0°) 401 E(C90) 143 E(C0) 140
1.5	1.52 1.56	E(0°) 178 E(C90) 63 E(C0) 62
2.0	2.03 2.08	E(0°) 100 E(C90) 36 E(C0) 35
2.5	2.54 2.60	E(0°) 64 E(C90) 23 E(C0) 22
3.0	3.04 3.12	E(0°) 45 E(C90) 16 E(C0) 16

— C0/C180 (Half-peak divergence: 55.0°)
— C90/C270 (Half-peak divergence: 53.8°)

Clase de eficiencia energética

Este producto contiene una fuente de luz de clase de eficiencia energética E.

Características Luminotécnicas

Light Output Ratio (LOR)	57 %
Flujo luminoso (fuente)	529 lm
Flujo luminoso de luminaria	305 lm
Consumption	5 W
Rendimiento luminoso de las luminarias	61 lm/W
Temperatura de color	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Índice de rendimientos cromático	80 Ra

Temperatura estándar del ambiente de servicio	-20 / +50°C
Temperatura típica sobre el vidrio	40°C

LED Life / Failure Ratio

L70 B10 C0 247450h (at Tj 60 Ta 25)

UGR


UGR axial	16.6
UGR transversal	16.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Óptica C0/C180	54°
Light distribution simmetry	Symmetrical



Orma_FJ | Uplights | Accessories
82664N60



Caja de empotrar

posición de instalación: piso; tipo instalación: albañilería L=56mm, H=88mm, D=56mm.

Material:Plástico ABS, color:negro.

Code

99922



Caja de empotrar

posición de instalación: piso; tipo instalación: albañilería L=97mm, H=88mm, D=97mm.

Material:Plástico ABS, color:negro.

Code

83038