




Downlights | 1 arrayLED 6.3 W DC 700 mA | CRI 90
C00049AUMMW



Ø42

35

| Datos técnicos | |
|---|-------------------|
| Posición de instalación | Techo |
| Ambiente de instalación | Interiores |
| Fuente de luz | LED |
| Circuit structure | arrayLED |
| Óptica | Medium Wide Flood |
| Light emission direction | downward |
| Potencia nominal | 6.3 W DC |
| Flujo luminoso (fuente) | 715 lm |
| Rango de voltaje de entrada | 700mA |
| CCT / Tone | 2700 K |
| Índice de rendimientos cromático | 90 Ra |
| C.C. / C.V. | CC |
| Clase de aislamiento | 3 |
| IP | IP44 |
| Test del hilo incandescente | 850° |
| Montaje directo sobre superficies normalmente inflamables | Sí |
| CE | Sí |
| Driver incluido. | No |
| Artículo regulable | DALI - 1-10V |
| Orientabilidad | No |
| Basculación | No |
| Practicabilidad | No |
| Transitabilidad | No |
| Cable incluido. | Sí |
| Largo del cable | 0.1 m |
| Resinado | No |
| Tipología de emisión luminosa | Una emisión |
| Peso neto | 0.11 Kg |
| Protección descargas electrostáticas | No |
| Protección contra sobretensiones | No |
| Tecnología óptica | Honey comb |

| Acabado cuerpo | |
|----------------|------------------------|
| Material | Aluminio 6026 |
| Color | dorado |
| Elaboración | Recubrimiento en polvo |

| Acabado difusor | |
|-----------------|---|
| Material | Policarbonato resistente a los rayos UV |
| Color | transparente |

| Acabado radiador | |
|------------------|------------------|
| Material | Aluminio fundido |
| Color | aluminio |
| Elaboración | Pulido |

Electrónica

- 
99147
On/Off Driver 198-264V AC (3 - 3 art.)
- 
99735
Multi Power 198-264V AC / 180-275V DC (1 art.)
- 
99733
1-10V Multi Power 198-264V AC / 180-275V DC (1 art.)
- 
83323
Push and Simply Dim - DALI-2 Controller (1 art.)
- 
C-E100016
Push and Simply Dim - DALI-2 Controller (2 - 4 art.)

Downlights | 1 arrayLED 6.3 W DC 700 mA | CRI 90
C00049AUMMW



Single emission recessed downlights for indoor application. The super warm white LED light source with a medium wide flood light distribution is composed of 1 arrayed LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 715 lm, with a 113.5 lm/W nominal luminous efficacy.

The device body is made of aluminium 6026 and features a gold finish, processed by means of powder coating; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP44; the total weight is of 0.11 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 6.3 W. The power supply cable is included and features a 0.1 m length.

The device features protection class III and can be ceiling-mounted, with a 35 mm diameter hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

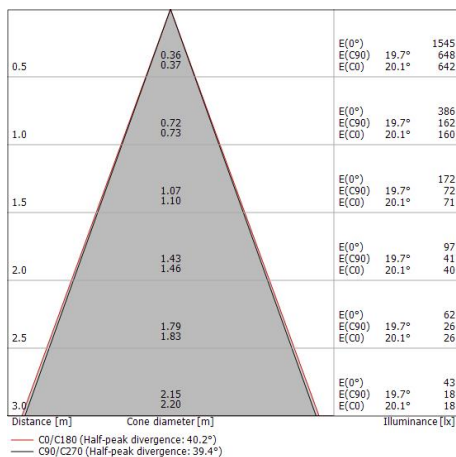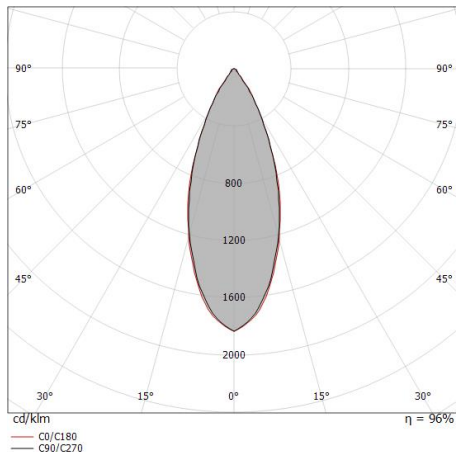

Clase de eficiencia energética

Este producto contiene una fuente de luz de clase de eficiencia energética F.

Características Luminotécnicas

| | |
|--|----------------|
| Light Output Ratio (LOR) | 29 % |
| Flujo luminoso (fuente) | 715 lm |
| Flujo luminoso de luminaria | 211 lm |
| Consumption | 6.5 W |
| Rendimiento luminoso de las luminarias | 32 lm/W |
| Temperatura de color | 2700 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Índice de rendimientos cromático | 90 Ra |

Temperatura estándar del ambiente de servicio -20 / +50°C

LED Life / Failure Ratio

L70 B10 C0 134020h (at Tj 65 Ta 25)

UGR

| | |
|-------------------|----------|
| UGR axial | 19.6 |
| UGR transversal | 19.6 |
| X=4H Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

OPTICAL

| | |
|-----------------------------|-------------|
| Óptica C0/C180 | 39° |
| Light distribution simmetry | Symmetrical |