

Silicone 130 LEDs/m




LED Strip | 1 topLED 207 W DC 48 V | 13.8 W/m
1429.33 Lm/m | CRI 90

C0055NDI15000



Datos técnicos	
Largo	15000 mm
Corte mínimo	100 mm
Posición de instalación	Pared - Techo
Ambiente de instalación	Exteriores
Fuente de luz	LED
Circuit structure	topLED
Óptica	Difusa
Light emission direction	external
Potencia nominal	207 W DC
Flujo luminoso (fuente)	21440 lm
Rango de voltaje de entrada	48V
CCT / Tone	4000 K
Índice de rendimientos cromático	90 Ra
C.C. / C.V.	CV
Clase de aislamiento	3
IP	IP67
Test del hilo incandescente	No
Montaje directo sobre superficies normalmente inflamables	Sí
CE	Sí
Driver incluido.	No
Artículo regulable	DALI - 1-10V
Orientabilidad	No
Basculación	No
Practicabilidad	No
Transitabilidad	No
Cable incluido.	Sí
Largo del cable	0.3 m
Resinado	No
Tipología de emisión luminosa	Una emisión
Largo	15000 mm
Peso neto	1.5 Kg
Protección descargas electrostáticas	No
Protección contra sobretensiones	No

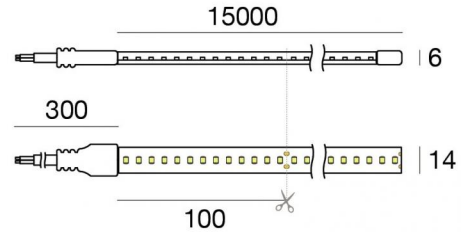

Acabado cuerpo

Color transparente

Electrónica

99784
Switching Driver 180~295V AC / 255~417V DC 60 W (1 art.)

99785
On/Off Driver 100~305V AC / 142~431V DC 240 W (1 art.)

83177
Push and Simply Dim - DMX-RDM Controller (1 art.)

C-E400003
Push and Simply Dim - DALI-2 Controller (1 art.)

Silicone 130 LEDs/m



LED Strip | 1 topLED 207 W DC 48 V | 13.8 W/m | 1429.33 Lm/m | CRI 90
C0055NDI15000

Single emission led strip for outdoor application. The natural white LED light source with a diffused light distribution is composed of 1950 stripled LEDs with CCT of 4000 K and a CRI 90; the source luminous flux is 21440 lm, with a 103.6 lm/W nominal luminous efficacy.

The device body is made of silicone and features a transparent finish. The ingress protection degree is IP67; the total weight is of 1.5 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 207 W. The power supply cable is included and features a 0.3 m length.

The device features protection class III and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Clase de eficiencia energética



Este producto contiene una fuente de luz de clase de eficiencia energética F.

Características Luminotécnicas

Flujo luminoso (fuente)	21440 lm
Temperatura de color	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Índice de rendimientos cromático	90 Ra
Temperatura estándar del ambiente de servicio	-20 / +45°C

LED Life / Failure Ratio


L70 B50 C0 50000h

Silicone 130 LEDs/m



LED Strip | 1 topLED 207 W DC 48 V | 13.8 W/m | 1429.33 Lm/m | CRI 90
C0055NDI15000


Components



LUNO_20/27 - Profili | Modular

Code


C-K100017



LUNO_20/27 - Profili | Modular

Code

C-K100018



Tabulo_35/14 - Profili | Modular

Code

C-K100025

Silicone 130 LEDs/m



Silicone 130 LEDs/m | LED Strip | Accessories
C0055NDI15000

	<p>Bolsa / Kit de fijación - Kit de fijación para Silicone_C 5 m 1 x pegamento, 10 x tacos</p>	<p>Code <u>C-V400002</u></p>
	<p>Soporte - Kit de soportes para PU_C 5 m y Silicone_C 5 m 10 x soportes, 20 x tornillos M3 x 25</p>	<p>Code <u>89223</u></p>
	<p>Difusor Material:PC, color:opalino.</p>	<p>Finish Opaline Code <u>C-K200001</u></p>
	<p>Difusor Material:PC, color:negro.</p>	<p>Finish Black Code <u>C-K200002</u></p>
	<p>Soporte L=9mm, H=8.8mm, D=21.8mm. Material:Hierro, color:pulido, elaboración :Lavado.</p>	<p>Code <u>98931</u></p>
	<p>Difusor Material:PC, color:opalino.</p>	<p>Finish Opaline Code <u>C-K200003</u></p>
	<p>Difusor Material:PC, color:negro.</p>	<p>Finish Black Code <u>C-K200004</u></p>
	<p>Difusor</p>	<p>Code <u>98898</u></p>

Silicone 130 LEDs/m




Silicone 130 LEDs/m | LED Strip | Accessories
C0055NDI15000

		Difusor	Code 98899
		Difusor	Code 98900
		Tapón	Code 98902
		Soporte	Finish White Code 98901
		Tapón	Code 98907
	Difusor	Finish Black Code C-K200009	
		Tapón	Code C-V400041
		Difusor	Finish Opaline Code 98395

Silicone 130 LEDs/m




Silicone 130 LEDs/m | LED Strip | Accessories
C0055NDI15000




Tapón

Code
98418




Muelles para empotrar - 5 piezas

Code
98420



Tapón
Material:plástico, color:gris.

Code
C-V400019




Tapón
Material:Plástico ABS, color:negro.

Code
C-V400020



Tapón
Material:plástico, color:gris.

Code
C-V400021



Tapón
Material:Plástico ABS, color:negro.

Code
C-V400022