





Uplights | 1 x powerLED 3 W DC 1000 mA | CRI 80  
**C01052ISMFL**

Single emission uplights for outdoor application. The super warm white LED light source with a flood light distribution is composed of 1 poweredLEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 417 lm, with a 139.0 lm/W nominal luminous efficacy.

The device body is made of aisi 316l steel and features a steel finish, processed by means of shot peening. The ingress protection degree is IP67; the total weight is of 0.130 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 3 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 84918(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Clase de eficiencia energética

Este producto contiene una fuente de luz de clase de eficiencia energética D.

### Características Luminotécnicas

Light Output Ratio (LOR)	51 %
Flujo luminoso (fuente)	417 lm
Flujo luminoso de luminaria	215 lm
Consumption	3 W
Rendimiento luminoso de las luminarias	71 lm/W
Temperatura de color	2700 K
Standard Deviation of Colour Matching	1.5 Step
Índice de rendimientos cromático	80 Ra

Temperatura estándar del ambiente de servicio -20 / +50°C

Temperatura típica sobre el vidrio 40°C

### LED Life / Failure Ratio


L70 B10 C0 361980h (at Tj 60 Ta 25 )

### UGR

UGR axial	22.5
UGR transversal	22.5
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

Óptica C0/C180	21°
Light distribution simmetry	Symmetrical

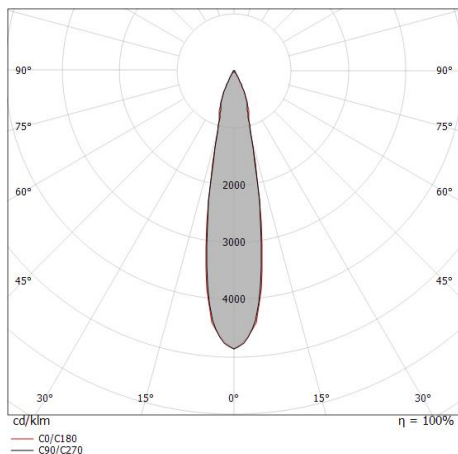

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.19 0.19	E(0°) 4182 E(C90) 2007 E(C0) 1993
1.0	0.37 0.38	E(0°) 1045 E(C90) 502 E(C0) 498
1.5	0.56 0.57	E(0°) 465 E(C90) 223 E(C0) 221
2.0	0.75 0.76	E(0°) 261 E(C90) 125 E(C0) 125
2.5	0.94 0.94	E(0°) 167 E(C90) 80 E(C0) 80
3.0	1.12 1.13	E(0°) 116 E(C90) 56 E(C0) 55

— C0/C180 (Half-peak divergence: 21.4°)  
 — C90/C270 (Half-peak divergence: 21.2°)



Beret\_2R | Uplights | Accessories  
**C01052ISMFL**



Caja de empotrar

posición de instalación: piso; tipo instalación: albañilería L=87mm, H=60mm, D=60mm.

Material:Plástico ABS, color:negro.

**Code**

84918