



Uplights | 1 x powerLED 3 W DC 1000 mA | CRI 80
C01052ISNWF

Single emission uplights for outdoor application. The natural white LED light source with a wide flood light distribution is composed of 1 poweredLEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 642 lm, with a 214.0 lm/W nominal luminous efficacy.

The device body is made of aisi 316l steel and features a steel finish, processed by means of shot peening. The ingress protection degree is IP67; the total weight is of 0.130 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 3 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 84918(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Clase de eficiencia energética

Este producto contiene una fuente de luz de clase de eficiencia energética D.

Características Luminotécnicas

Light Output Ratio (LOR)	39 %
Flujo luminoso (fuente)	642 lm
Flujo luminoso de luminaria	256 lm
Consumption	3 W
Rendimiento luminoso de las luminarias	85 lm/W
Temperatura de color	4000 K
Standard Deviation of Colour Matching	1.5 Step
Índice de rendimientos cromático	80 Ra

Temperatura estándar del ambiente de servicio	-20 / +50°C
Temperatura típica sobre el vidrio	40°C

LED Life / Failure Ratio


L70 B10 C0 361980h (at Tj 60 Ta 25)

UGR

UGR axial	24.5
UGR transversal	24.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Óptica C0/C180	56°
Light distribution simmetry	Symmetrical

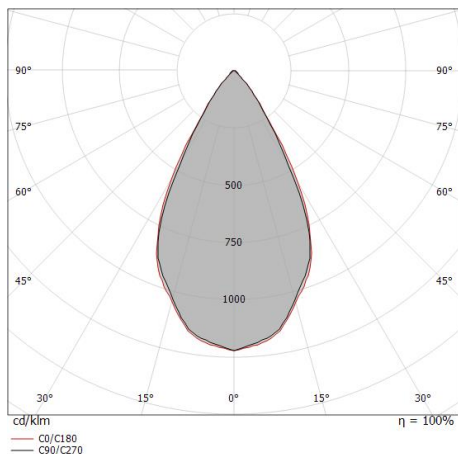

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.53 0.55	E(0°) 1249 E(C90) 432 E(C0) 421
1.0	1.06 1.10	E(0°) 312 E(C90) 108 E(C0) 105
1.5	1.59 1.65	E(0°) 139 E(C90) 48 E(C0) 47
2.0	2.12 2.20	E(0°) 78 E(C90) 27 E(C0) 26
2.5	2.65 2.75	E(0°) 50 E(C90) 17 E(C0) 17
3.0	3.18 3.30	E(0°) 35 E(C90) 12 E(C0) 12

— C0/C180 (Half-peak divergence: 57.6°)
 — C90/C270 (Half-peak divergence: 55.8°)



Beret_2R | Uplights | Accessories
C01052ISNWF



Caja de empotrar

posición de instalación: piso; tipo instalación: albañilería L=87mm, H=60mm, D=60mm.

Material:Plástico ABS, color:negro.

Code

84918