





Uplights | 198-264 V AC /--- V DC | 1 arrayLED 8 W DC - 9 W AC | CRI 80  
82267N35

### Classe d'efficacité énergétique

Ce produit contient une source lumineuse de classe d'efficacité énergétique E.

### Caractéristiques Techniques de l'éclairage

|  |                |
|--|----------------|
| Light Output Ratio (LOR)                   | 85 %           |
| Flux lumineux (source)                     | 1016 lm        |
| Flux lumineux du luminaire                 | 867 lm         |
| Consumption                                | 9 W            |
| Efficacité lumineuse du luminaire          | 96 lm/W        |
| Température de couleur                     | 4000 K         |
| Standards de Concordance de Couleur        | 2 Step MacAdam |
| Indice de rendu chromatique                | 80 Ra          |
| Black Body Locus                           | On             |
| Température standard de l'environnement de | -20 / +50°C    |
| Température typique sur le verre           | 40°C           |

### LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25 )

### UGR

|                   |          |
|-------------------|----------|
| UGR axial         | 8.2      |
| UGR transversal   | 8.4      |
| X=4H   Y=8H       | S=0.25H  |
| Reflection factor | 70/50/20 |

### OPTICAL

|                             |             |
|-----------------------------|-------------|
| Optique C0/C180             | 25°         |
| Light distribution simmetry | Symmetrical |





Single emission uplights for outdoor application. The natural white LED light source with a flood light distribution is composed of 1 arrayed LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 1016 lm, with a 127.0 lm/W nominal luminous efficacy.

The device body is made of ot58 brass and features a raw brass finish; the diffuser is made of extra clear glass - tempered. The ingress protection degree is IP68; the total weight is of 2.5 kg.

The total absorbed power is 9 W. The power supply cable is included and features a 1 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 84900(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

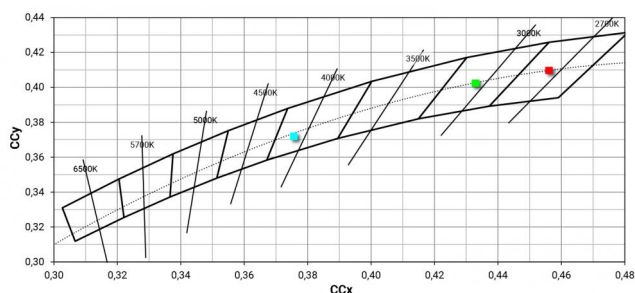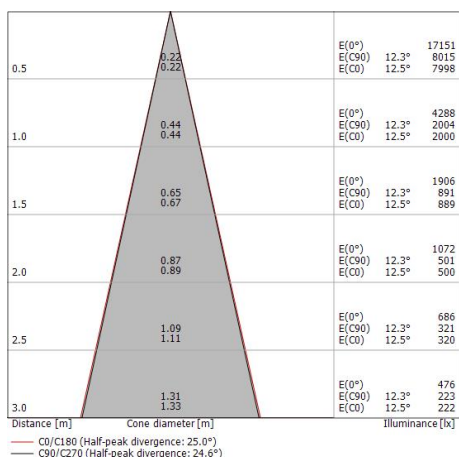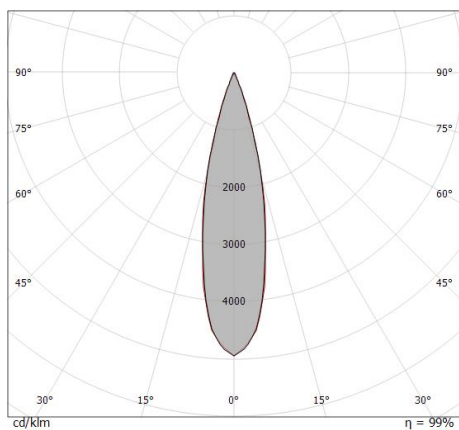



Suelo\_Brass | Uplights | Accessories  
**82267N35**



Boîtier d'encastrement

position d'installation: sol; type installation: maçonnerie L=220mm, H=110mm, D=110mm.

Matériau:Plastique ABS, couleur:noir.

**Code**

84900