





Éléments linéaires | 198-264 V | 9 x powerLEDs 19.8 W DC - 22 W AC | CRI 80  
**82304W08**

Single emission lines for outdoor application. The warm white LED light source with a narrow spot light distribution is composed of 9 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 2718 lm, with a 137.3 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised black finish, processed by means of 15 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 2.8 kg.

The total absorbed power is 22 W. The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 98725(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Classe d'efficacité énergétique

Ce produit contient 2 sources lumineuses de classe d'efficacité énergétique D.

### Caractéristiques Techniques de l'éclairage

Light Output Ratio (LOR)	56 %
Flux lumineux (source)	2718 lm
Flux lumineux du luminaire	1545 lm
Consumption	22 W
Efficacité lumineuse du luminaire	70 lm/W
Température de couleur	3000 K
Standards de Concordance de Couleur	1.5 Step
Indice de rendu chromatique	80 Ra


Température standard de l'environnement de	-20 / +50°C
Température typique sur le verre	40°C

### LED Life / Failure Ratio

L70 B10 C0 361980h (at Tj 60 Ta 25 )

### OPTICAL

Optique C90/C270	26°
Optique C0/C180	16°
Light distribution symmetry	Symmetrical 2 assis

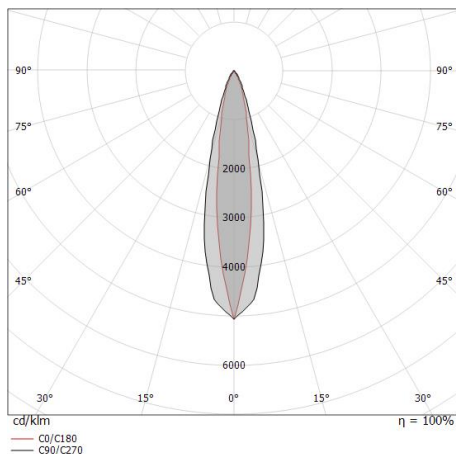



	<p>Câble et connecteur                  Longueur 2000 mm; isolation doppio; section 1.5 mm<sup>2</sup>; serre-câble: non; diamètre externe: 9.5 mm; couleurs: bleu - brun - jaune-vert.</p>	<p><b>Code</b>  <u>99057</u></p>
--	---	--------------------------------------

	<p>Câble et connecteur                  Longueur 5000 mm; isolation doppio; section 1.5 mm<sup>2</sup>; serre-câble: non; diamètre externe: 9.5 mm; couleurs: bleu - brun - jaune-vert.</p>	<p><b>Code</b>  <u>98147</u></p>
--	---	--------------------------------------

		<p>Câble et connecteur                  Longueur 10000 mm; isolation doppio; section 1.5 mm<sup>2</sup>; serre-câble: non; diamètre externe: 9.5 mm; couleurs: bleu - brun - jaune-vert.</p>	<p><b>Code</b>  <u>98146</u></p>
--	--	--	--------------------------------------

		<p>Boîtier d'encastrement                  position d'installation: sol; type installation: maçonnerie L=511mm, H=140mm, D=75mm.                  Matériau:Aluminium 6060, couleur:Noir anodisé, fabrication :Anodisation 15 ?m.</p>	<p><b>Finish</b>  <span style="background-color: black; color: black;">XXXXXXXXXX</span> <b>Code</b>  <u>98725</u></p>
--	--	--	--

	<p>Clé</p>	<p><b>Code</b>  <u>98957</u></p>
--	------------	--------------------------------------