

Éléments linéaires | 198-264 V | 18 x powerLED 39.6 W DC - 44 W AC | CRI 80
82306N27

Single emission lines for outdoor application. The natural white LED light source with a asymmetric wallwasher light distribution is composed of 18 powerLED LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 5796 lm, with a 146.4 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised black finish, processed by means of 15 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 4.8 kg.

The total absorbed power is 44 W. The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 98726(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Classe d'efficacité énergétique

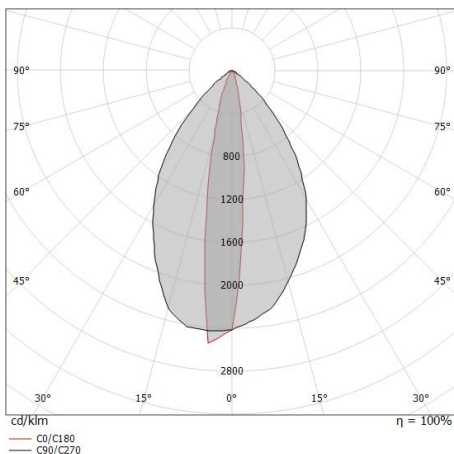
Ce produit contient 4 sources lumineuses de classe d'efficacité énergétique D.

Caractéristiques Techniques de l'éclairage


Light Output Ratio (LOR)	66 %
Flux lumineux (source)	5796 lm
Flux lumineux du luminaire	3868 lm
Consumption	44 W
Efficacité lumineuse du luminaire	87 lm/W
Température de couleur	4000 K
Standards de Concordance de Couleur	1.5 Step
Indice de rendu chromatique	80 Ra
Température standard de l'environnement de	-20 / +50°C
Température typique sur le verre	40°C


LED Life / Failure Ratio



L70 B10 C0 361980h (at Tj 60 Ta 25)









	<p>Câble et connecteur Longueur 2000 mm; isolation doppio; section 1.5 mm²; serre-câble: non; diamètre externe: 9.5 mm; couleurs: bleu - brun - jaune-vert.</p>	<p>Code <u>99057</u></p>
--	---	--------------------------------------

	<p>Câble et connecteur Longueur 5000 mm; isolation doppio; section 1.5 mm²; serre-câble: non; diamètre externe: 9.5 mm; couleurs: bleu - brun - jaune-vert.</p>	<p>Code <u>98147</u></p>
--	---	--------------------------------------

		<p>Câble et connecteur Longueur 10000 mm; isolation doppio; section 1.5 mm²; serre-câble: non; diamètre externe: 9.5 mm; couleurs: bleu - brun - jaune-vert.</p>	<p>Code <u>98146</u></p>
---	---	--	--------------------------------------

		<p>Boîtier d'encastrement position d'installation: sol; type installation: maçonnerie L=1001mm, H=140mm, D=75mm. Matériau:Aluminium 6060, couleur:Noir anodisé, fabrication :Anodisation 15 ?m.</p>	<p>Finish  Code <u>98726</u></p>
--	---	---	---

	<p>Clé</p>	<p>Code <u>98957</u></p>
--	------------	--------------------------------------