





## Downlights | 1 arrayLED 8 W DC 220 mA | CRI 80 82452W60



Single emission recessed downlights for outdoor application. The warm white LED light source is composed of 1 arrayLEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1182 lm, with a 147.8 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 0.5 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 8 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be ceiling-mounted, with a 86 mm diameter hole (in plasterboard) with an outer casing, code 99749(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

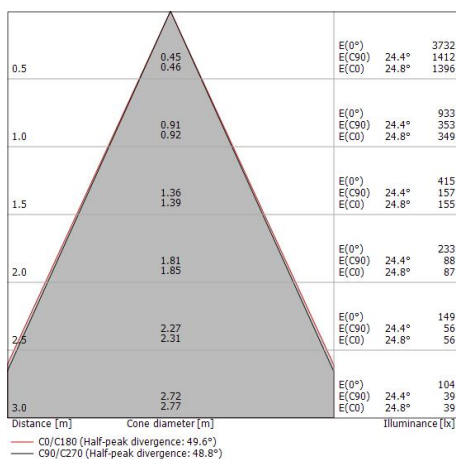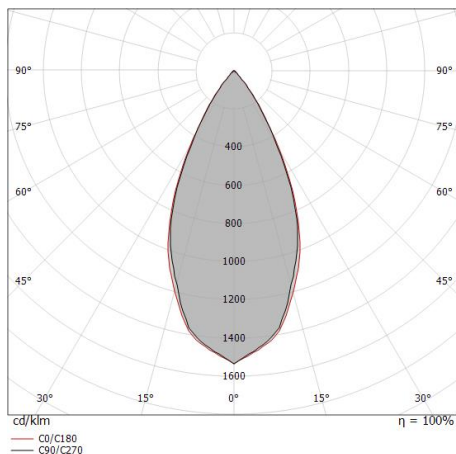

### Classe d'efficacité énergétique

Ce produit contient une source lumineuse de classe d'efficacité énergétique E.

### Caractéristiques Techniques de l'éclairage

Light Output Ratio (LOR)	51 %
Flux lumineux (source)	1182 lm
Flux lumineux du luminaire	608 lm
Consumption	8 W
Efficacité lumineuse du luminaire	76 lm/W
Température de couleur	3000 K
Standards de Concordance de Couleur	2 Step MacAdam
Indice de rendu chromatique	80 Ra

Température standard de l'environnement de -20 / +50°C

Température typique sur le verre 40°C

### LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25 )

### UGR

UGR axial	16.1
UGR transversal	16.1
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

Optique C0/C180	49°
Light distribution simmetry	Symmetrical




Boîtier d'encastrement  
position d'installation: plafond; type installation: maçonnerie L=200mm, H=113mm,  
D=137mm.  
Matériau:polypropylène, couleur:blanc.

**Code**  
89373




Boîtier d'encastrement  
position d'installation: plafond; type installation: maçonnerie L=370mm, H=120mm,  
D=200mm.  
Matériau:polypropylène, couleur:blanc.

**Code**  
89374



Boîtier d'encastrement - (à compléter avec le gril universel 99750)  
position d'installation: plafond; type installation: maçonnerie L=290mm, H=125mm,  
D=190mm

**Code**  
99749



Accessoires pour boîtiers extérieurs - Grille universelle pour caisson extérieur 99749

**Code**  
99750