





Uplights | 100-250 V | 1 x powerLED 1.6 W DC - 3 W AC | CRI 80  
83568N08

Single emission uplights for outdoor application. The natural white LED light source with a narrow spot light distribution is composed of 1 powerLED LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 266 lm, with a 166.3 lm/W nominal luminous efficacy.

The device body is made of ot58 brass and features a white finish, processed by means of powder coating. The ingress protection degree is IP67; the total weight is of 0.230 kg.

The total absorbed power is 3 W. The power supply cable is included and features a 1 m length.

The device features protection class II and can be wall lights or floor-mounted with an outer casing, code 84918(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Classe d'efficacité énergétique

Ce produit contient une source lumineuse de classe d'efficacité énergétique D.

### Caractéristiques Techniques de l'éclairage

Light Output Ratio (LOR)	68 %
Flux lumineux (source)	266 lm
Flux lumineux du luminaire	181 lm
Consumption	3 W
Efficacité lumineuse du luminaire	60 lm/W
Température de couleur	4000 K
Standards de Concordance de Couleur	1.5 Step
Indice de rendu chromatique	80 Ra
Température standard de l'environnement de	-20 / +50°C
Température typique sur le verre	50°C

### LED Life / Failure Ratio


L70 B10 C0 361980h (at Tj 60 Ta 25 )

### UGR

UGR axial	12.3
UGR transversal	12.4
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

Optique C0/C180	10°
Light distribution simmetry	Symmetrical

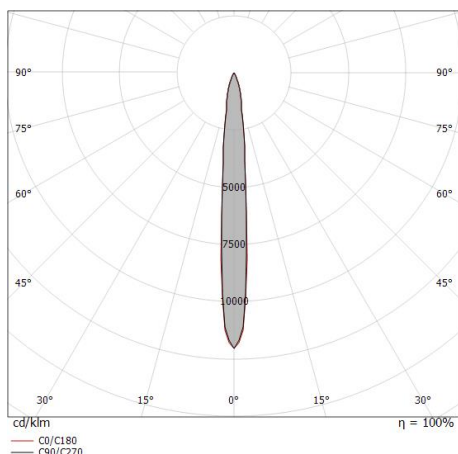

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.09 0.09	E(0°) 8693 E(C90) 5.1° 4318 E(C0) 5.2° 4362
1.0	0.18 0.18	E(0°) 2173 E(C90) 5.1° 1079 E(C0) 5.2° 1090
1.5	0.27 0.27	E(0°) 966 E(C90) 5.1° 480 E(C0) 5.2° 485
2.0	0.36 0.36	E(0°) 543 E(C90) 5.1° 270 E(C0) 5.2° 273
2.5	0.45 0.46	E(0°) 348 E(C90) 5.1° 173 E(C0) 5.2° 174
3.0	0.54 0.55	E(0°) 241 E(C90) 5.1° 120 E(C0) 5.2° 121

Distance [m] Cone diameter [m] illuminance [lx]

— C0/C180 (Half-peak divergence: 10.4°)  
— C90/C270 (Half-peak divergence: 10.2°)



Beret\_2R | Uplights | Accessories  
**83568N08**



Boîtier d'encastrement

position d'installation: sol; type installation: maçonnerie L=87mm, H=60mm, D=60mm.

Matériau:Plastique ABS, couleur:noir.

**Code**

84918