



Suspension | 220-240 V | 312 topLED 36 W DC - 42 W AC | CRI 90  
9197


Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 312 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 5950 lm, with a 165.3 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a white finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of aluminium, with a white finish, processed by means of coating. The ingress protection degree is IP20;

The total absorbed power is 42 W. The power supply cable is included and features a 2.2 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

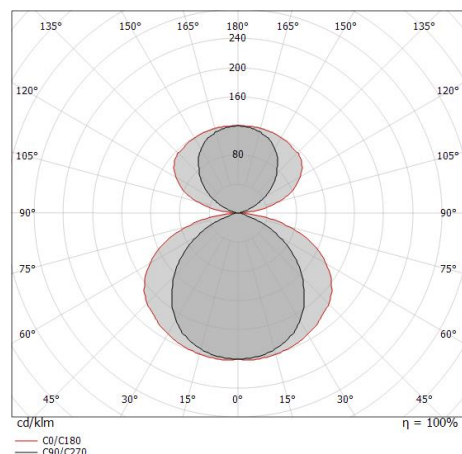

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.26 2.70	E(0°) 3157 E(C90) 379 E(C0) 66
1.0	2.52 5.41	E(0°) 789 E(C90) 95 E(C0) 17
1.5	3.79 8.11	E(0°) 351 E(C90) 42 E(C0) 7
2.0	5.05 10.81	E(0°) 197 E(C90) 24 E(C0) 4
2.5	6.31 13.52	E(0°) 126 E(C90) 15 E(C0) 3
3.0	7.57 16.22	E(0°) 88 E(C90) 11 E(C0) 2

— C0/C180 (Half-peak divergence: 139.4°)  
— C90/C270 (Half-peak divergence: 103.2°)

### Classe d'efficacité énergétique

Ce produit contient 6 sources lumineuses de classe d'efficacité énergétique D.

### Caractéristiques Techniques de l'éclairage

Light Output Ratio (LOR)	66 %
Flux lumineux (source)	5950 lm
Flux lumineux du luminaire	3929 lm
Consumption	42 W
Efficacité lumineuse du luminaire	93 lm/W
Température de couleur	3000 K
Standards de Concordance de Couleur	3 Step MacAdam
Indice de rendu chromatique	90 Ra
Température de jonction (appareil)	80
Température standard de l'environnement de	25°C

### LED Life / Failure Ratio

L70 B20 C0 72500h

### UGR

UGR axial	21.8
UGR transversal	27.6
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

Optique C90/C270	103°
Optique C0/C180	139°
Light distribution simmetry	Symmetrical 2 assis