





Éléments linéaires | 198-264 V | 11 x powerLEDs 12.1 W DC - 13.5 W AC | CRI 80  
**92049M60**

Single emission lines for outdoor application. The super warm white LED light source is composed of 11 powered LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 1716 lm, with a 141.8 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised black finish, processed by means of 15 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 1.5 kg.

The total absorbed power is 13.5 W. The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 98724(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

## Classe d'efficacité énergétique

Ce produit contient une source lumineuse de classe d'efficacité énergétique D.


## Caractéristiques Techniques de l'éclairage

Light Output Ratio (LOR)	45 %
Flux lumineux (source)	1716 lm
Flux lumineux du luminaire	789 lm
Consumption	13.5 W
Efficacité lumineuse du luminaire	58 lm/W
Température de couleur	2700 K
Standards de Concordance de Couleur	1.5 Step
Indice de rendu chromatique	80 Ra

Température standard de l'environnement de	-20 / +50°C
Température typique sur le verre	40°C

## LED Life / Failure Ratio

L70 B10 C0 361980h (at Tj 60 Ta 25 )

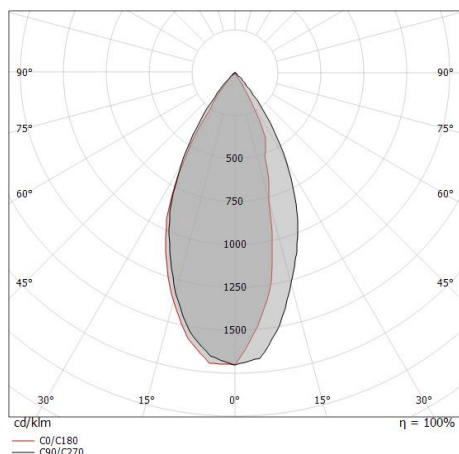



	<p>Câble et connecteur                      Longueur 2000 mm; isolation doppio; section 1.5 mm<sup>2</sup>; serre-câble: non; diamètre externe: 9.5 mm; couleurs: bleu - brun - jaune-vert.</p>	<p><b>Code</b>  <u>99057</u></p>	
	<p>Câble et connecteur                      Longueur 5000 mm; isolation doppio; section 1.5 mm<sup>2</sup>; serre-câble: non; diamètre externe: 9.5 mm; couleurs: bleu - brun - jaune-vert.</p>	<p><b>Code</b>  <u>98147</u></p>	
		<p>Câble et connecteur                      Longueur 10000 mm; isolation doppio; section 1.5 mm<sup>2</sup>; serre-câble: non; diamètre externe: 9.5 mm; couleurs: bleu - brun - jaune-vert.</p>	<p><b>Code</b>  <u>98146</u></p>
		<p>Boîtier d'encastrement                      position d'installation: sol; type installation: maçonnerie L=320mm, H=140mm, D=75mm.                      Matériau:Aluminium 6060, couleur:Noir anodisé, fabrication :Anodisation 15 ?m.</p>	<p><b>Finish</b>  <span style="background-color: black; color: black;">XXXXXXXXXX</span>  <b>Code</b>  <u>98724</u></p>
	<p>Clé</p>	<p><b>Code</b>  <u>98957</u></p>	