



Аплайты | 1 arrayLED 8 W DC 220 mA | CRI 80  
77317W30


Single emission uplights for outdoor application. The warm white LED light source with a flood light distribution is composed of 1 arrayed LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1126 lm, with a 140.8 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 0.65 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 8 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code C-C100003(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

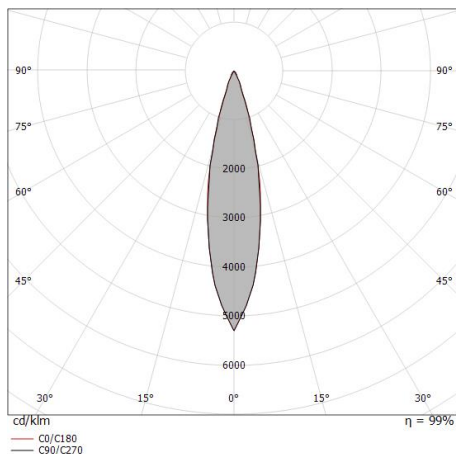

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.20 0.21	E(0°) 12178 E(C90) 11.5° 5776 E(C0) 11.6° 5766
1.0	0.41 0.41	E(0°) 3045 E(C90) 11.5° 1444 E(C0) 11.6° 1442
1.5	0.61 0.62	E(0°) 1353 E(C90) 11.5° 842 E(C0) 11.6° 641
2.0	0.81 0.82	E(0°) 761 E(C90) 11.5° 361 E(C0) 11.6° 360
2.5	1.02 1.03	E(0°) 487 E(C90) 11.5° 231 E(C0) 11.6° 231
3.0	1.22 1.23	E(0°) 338 E(C90) 11.5° 160 E(C0) 11.6° 160

— C0/C180 (Half-peak divergence: 23.2°)  
— C90/C270 (Half-peak divergence: 23.0°)

### Класс энергоэффективности

Этот продукт содержит источник света класса энергоэффективности E.

### Иlluminotechnical Особенности

Light Output Ratio (LOR)	50 %
Световой поток (источник)	1126 lm
Световой поток светильника	574 lm
Consumption	8 W
КПД светильника	71 lm/W
Температура цвета	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Коэффициент цветопередачи	80 Ra
Black Body Locus	On

Стандартная температура рабочей среды -20 / +50°C

Обычная температура стекла 50°C

### LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25)

### UGR

UGR axial 7.1

UGR transversal 6.9

X=4H | Y=8H S=0.25H


Reflection factor 70/50/20

### OPTICAL

Оптика C0/C180 23°

Light distribution symmetry Symmetrical

### COLOR VECTOR GRAPHIC

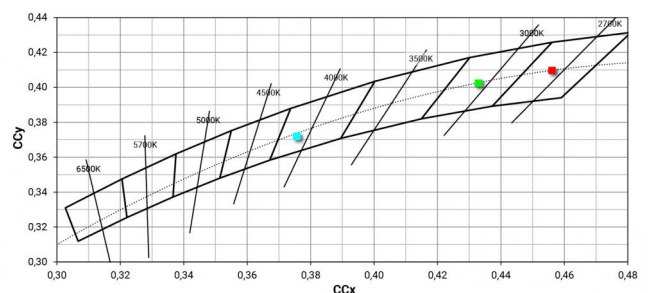



Orma\_QFJ | Uplights | Accessories  
77317W30



Инструмент - Присоска для извлечения продукта  
Материал:пластик, Цвет:оранжевый, обработки :Окраска.

**Code**  
83235



Монтажный корпус  
Место установки: Пол; Тип установки: Стена из кладки L=114mm, H=93mm, D=114mm.  
Материал:АБС-пластик, Цвет:черный.

**Code**  
C-C100003