





Линейные элементы | 220-240 V | 6 x powerLEDs 12.2 W DC - 13.5 W AC | CRI 80  
**82303W25**



Single emission lines for outdoor application. The warm white LED light source with an elliptical light distribution is composed of 6 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1812 lm, with a 148.5 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised black finish, processed by means of 15 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 1.5 kg.

The total absorbed power is 13.5 W. The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 98724(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

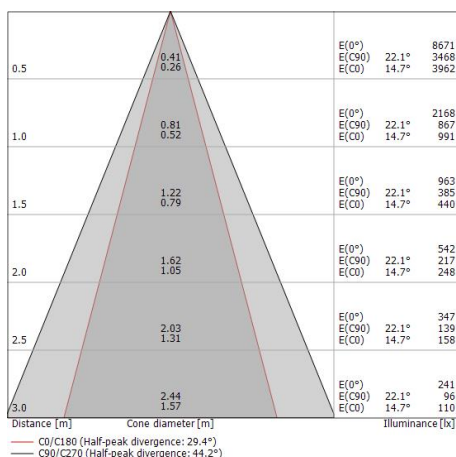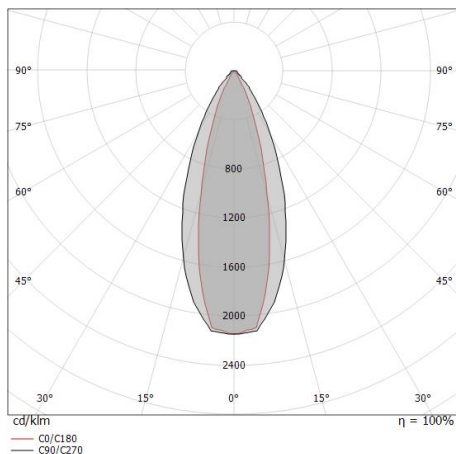

### Класс энергоэффективности

Этот продукт содержит источник света класса энергоэффективности D .

### Иlluminotechnical Особенности

Light Output Ratio (LOR)	55 %
Световой поток (источник)	1812 lm
Световой поток светильника	1009 lm
Consumption	13.5 W
КПД светильника	74 lm/W
Температура цвета	3000 K
Standard Deviation of Colour Matching	1.5 Step MacAdam
Коэффициент цветопередачи	80 Ra

Стандартная температура рабочей среды -20 / +50°C

Обычная температура стекла 40°C

### LED Life / Failure Ratio

L70 B10 C0 361980h (at Tj 60 Ta 25 )









### UGR

UGR axial	18.9
UGR transversal	7.2
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

Оптика C90/C270	44°
Оптика C0/C180	29°
Light distribution symmetry	Symmetrical 2 assis



 	<p>Монтажный корпус</p> <p>Место установки: Пол; Тип установки: Стена из кладки L=320mm, H=140mm, D=75mm.</p> <p>Материал:Алюминий 6060, Цвет:Анодированный черный, обработки :Анодирование 15 мкм.</p>	<p><b>Finish</b></p> <p></p> <p><b>Code</b></p> <p>98724</p>
	<p>Кабель и соединитель</p> <p>Длина 5000 mm.</p>	<p><b>Code</b></p> <p>99822</p>
	<p>Кабель и соединитель</p> <p>Длина 1000 mm.</p>	<p><b>Code</b></p> <p>99823</p>
	<p>Кабель и соединитель</p> <p>Длина 5000 mm.</p>	<p><b>Code</b></p> <p>99824</p>
	<p>Кабель и соединитель</p> <p>Длина 10000 mm.</p>	<p><b>Code</b></p> <p>99825</p>
	<p>Кабель и соединитель</p> <p>Длина 1000 mm.</p>	<p><b>Code</b></p> <p>99826</p>