



Линейные элементы | 220-240 V | 9 x powerLED 18.3 W DC - 20.5 W AC | CRI 80
82305N30



Single emission lines for outdoor application. The natural white LED light source with a medium flood light distribution is composed of 9 powerLEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 2898 lm, with a 158.4 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised black finish, processed by means of 15 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 2.8 kg.

The total absorbed power is 20.5 W. The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 98725(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

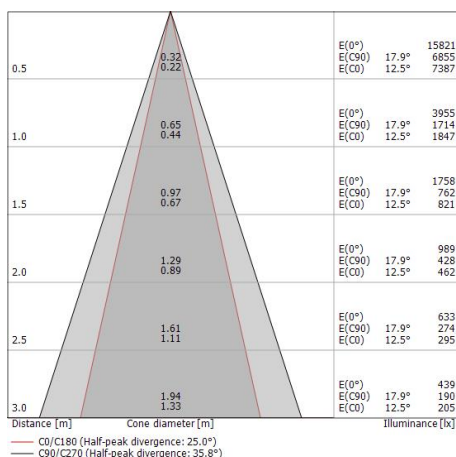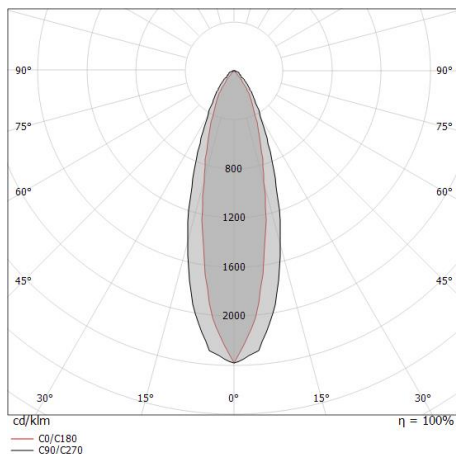

Класс энергоэффективности

Этот продукт содержит 2 источника света класса энергоэффективности D.

Иlluminotechnical Особенности

Light Output Ratio (LOR)	57 %
Световой поток (источник)	2898 lm
Световой поток светильника	1658 lm
Consumption	20.5 W
КПД светильника	80 lm/W
Температура цвета	4000 K
Standard Deviation of Colour Matching	1.5 Step MacAdam
Коэффициент цветопередачи	80 Ra

Стандартная температура рабочей среды -20 / +50°C

Обычная температура стекла 40°C

LED Life / Failure Ratio

L70 B10 C0 361980h (at Tj 60 Ta 25)









UGR

UGR axial	19.2
UGR transversal	12.2
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Оптика C90/C270	36°
Оптика C0/C180	25°
Light distribution symmetry	Symmetrical 2 assis



 	<p>Монтажный корпус</p> <p>Место установки: Пол; Тип установки: Стена из кладки L=511mm, H=140mm, D=75mm.</p> <p>Материал:Алюминий 6060, Цвет:Анодированный черный, обработки :Анодирование 15 мкм.</p>	<p>Finish</p> <p></p> <p>Code</p> <p>98725</p>
	<p>Кабель и соединитель</p> <p>Длина 5000 mm.</p>	<p>Code</p> <p>99822</p>
	<p>Кабель и соединитель</p> <p>Длина 1000 mm.</p>	<p>Code</p> <p>99823</p>
	<p>Кабель и соединитель</p> <p>Длина 5000 mm.</p>	<p>Code</p> <p>99824</p>
	<p>Кабель и соединитель</p> <p>Длина 10000 mm.</p>	<p>Code</p> <p>99825</p>
	<p>Кабель и соединитель</p> <p>Длина 1000 mm.</p>	<p>Code</p> <p>99826</p>