



Линейные элементы | 220-240 V | 18 x powerLEDs 36.5 W DC - 41 W AC | CRI 80
82307W15



Single emission lines for outdoor application. The warm white LED light source with a spot light distribution is composed of 18 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 5436 lm, with a 148.9 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised black finish, processed by means of 15 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 4.8 kg.

The total absorbed power is 41 W. The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 98726(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

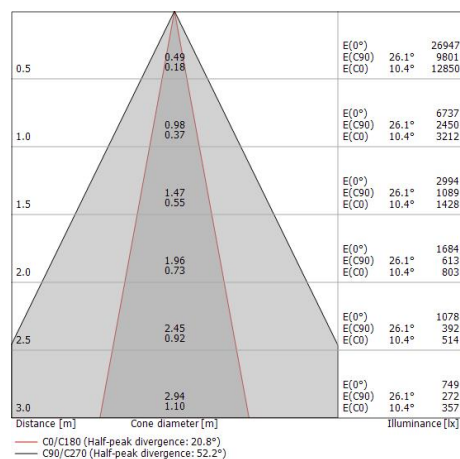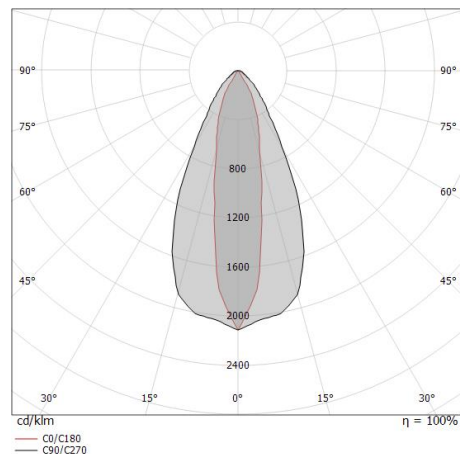

Класс энергоэффективности

Этот продукт содержит 4 источника света класса энергоэффективности D.

Лuminotechnical Особенности

Light Output Ratio (LOR)	58 %
Световой поток (источник)	5436 lm
Световой поток светильника	3185 lm
Consumption	41 W
КПД светильника	77 lm/W
Температура цвета	3000 K
Standard Deviation of Colour Matching	1.5 Step MacAdam
Коэффициент цветопередачи	80 Ra
Стандартная температура рабочей среды	-20 / +50°C
Обычная температура стекла	40°C

LED Life / Failure Ratio

L70 B10 C0 361980h (at Tj 60 Ta 25)







UGR

UGR axial	20.7
UGR transversal	9.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

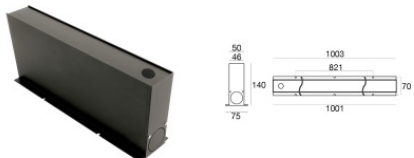Оптика C90/C270	52°
Оптика C0/C180	21°
Light distribution simmetry	Symmetrical 2 assis



	<p>Монтажный корпус Место установки: Пол; Тип установки: Стена из кладки L=1001mm, H=140mm, D=75mm. Материал:Алюминий 6060, Цвет:Анодированный черный, обработки :Анодирование 15 мкм.</p>	<p>Finish [Black Box]</p> <p>Code 98726</p>
	<p>Кабель и соединитель Длина 5000 mm.</p>	<p>Code 99822</p>
	<p>Кабель и соединитель Длина 1000 mm.</p>	<p>Code 99823</p>
	<p>Кабель и соединитель Длина 5000 mm.</p>	<p>Code 99824</p>
	<p>Кабель и соединитель Длина 10000 mm.</p>	<p>Code 99825</p>
	<p>Кабель и соединитель Длина 1000 mm.</p>	<p>Code 99826</p>