



Аплайты | 198-264 V | 2 x powerLED 8 W DC - 9 W AC | CRI 80
82640M12

Double emission uplights for outdoor application. The super warm white LED light source with a radial bi-directional emission light distribution is composed of 2 powered LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 980 lm, with a 122.5 lm/W nominal luminous efficacy.

The diffuser is made of extra clear glass - tempered with a sandblasting treatment. The ingress protection degree is IP67; the total weight is of 1.32 kg.

The total absorbed power is 9 W. The power supply cable is included and features a 1 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 84900(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Класс энергоэффективности

Этот продукт содержит 2 источника света класса энергоэффективности E .

Phototechnical Особенности

Light Output Ratio (LOR)	19 %
Световой поток (источник)	980 lm
Световой поток светильника	189 lm
Consumption	9 W
КПД светильника	21 lm/W
Температура цвета	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Коэффициент цветопередачи	80 Ra
Black Body Locus	On




Стандартная температура рабочей среды	-20 / +50°C
Обычная температура стекла	50°C

LED Life / Failure Ratio

L70 B10 C0 247450h (at Tj 60 Ta 25)

OPTICAL

Оптика C0/C180	180°
Light distribution symmetry	Symmetrical

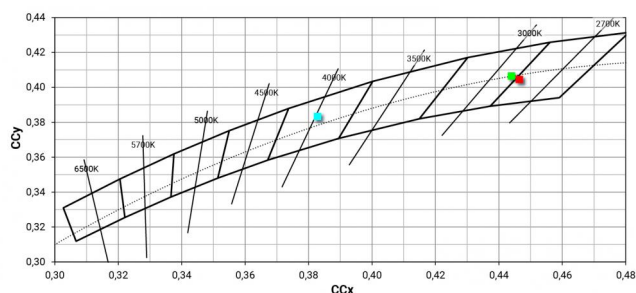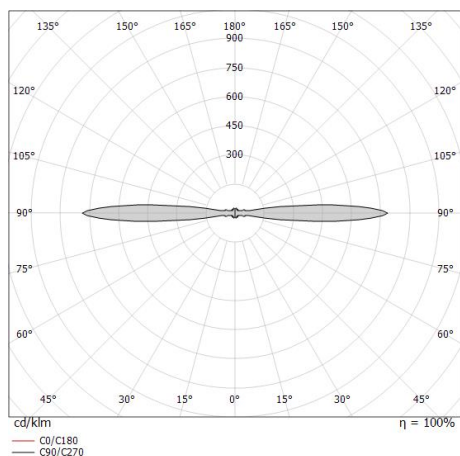



Alcor_R2 Blade | Step Lights | Accessories
82640M12



Монтажный корпус

Место установки: Пол; Тип установки: Стена из кладки L=220mm, H=110mm, D=110mm.

Материал: АБС-пластик, Цвет: черный.

Code

84900