


**Luminaire**  
 Code C00016GGMSR  
 Name Buzzer Pro Bollards 9.3W DC DALI  
**Measurem.**  
 Code RF\_221116\_03\_5+  
 Name Buzzer Pro Bollards 9.3W DC DALI

Luminaire Flux	122 lm	Luminaire Power	11.0 W	Efficacy	11.122 lm/W	Efficiency	100.00%
Source Flux	122 lm	Maximum value	765.49 cd/klm	Position	C=85.00 G=72.50	CG	Sym. on planes 270-90


US ROAD STANDARDS

% Lamp lm

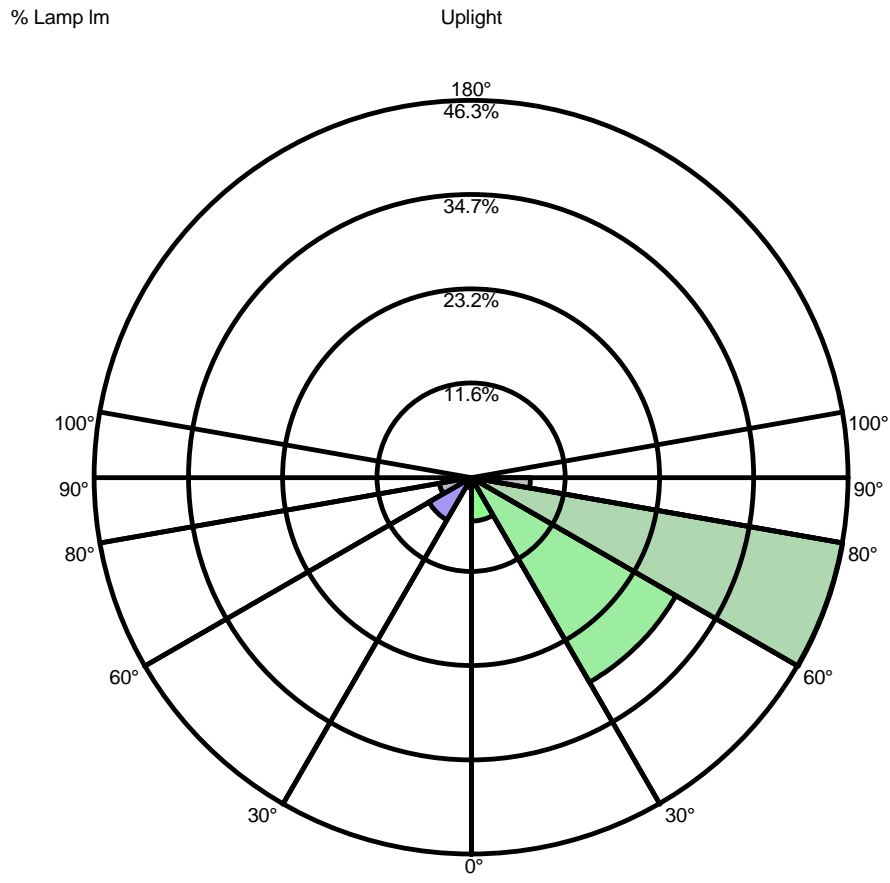

Back

Front

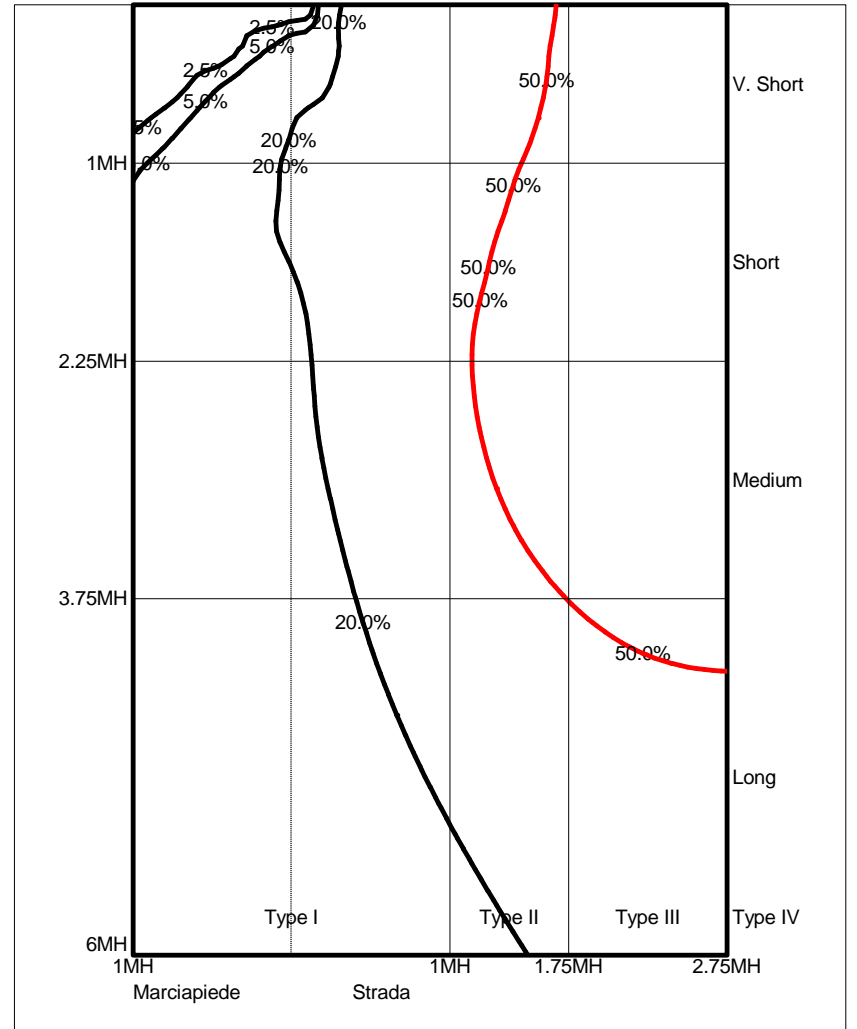

Luminaire Classification System (LCS)			
LCS Zone		Lumens	%Lamp %Lum
FL	0° -- 30°	6.5 lm	5.3 % 5.3 %
FM	30° -- 60°	35.5 lm	29.0 % 29.0 %
FH	60° -- 80°	56.7 lm	46.3 % 46.3 %
FVH	80° -- 90°	8.9 lm	7.2 % 7.2 %
BL	0° -- 30°	1.5 lm	1.3 % 1.3 %
BM	30° -- 60°	7.4 lm	6.0 % 6.0 %
BH	60° -- 80°	4.9 lm	4.0 % 4.0 %
BVH	80° -- 90°	1.0 lm	0.8 % 0.8 %
UL	90° -- 100°	0.0 lm	0.0 % 0.0 %
UH	100° -- 180°	0.0 lm	0.0 % 0.0 %
TOTALS		122.3 lm	100.0 % 100.0 %
BUG B0 U0 G0 Type II Very Short Asymmetrical			