

A detailed line-art illustration of an industrial factory setting. In the foreground, a worker wearing safety glasses and a hard hat is shown in profile, looking towards the right. Behind him, a large gear mechanism is visible. To the right, another worker is standing near a conveyor belt. In the background, there are various industrial structures, including a large cylindrical tank and a building with a recycling symbol on its side. The overall style is clean and technical.


MAESTRO 3.0

PROFESSIONAL
ARCHITECTURAL
LIGHTING

Flex light

The logo for i-LèD, featuring the lowercase letters 'i-LèD' in a bold, sans-serif font. The 'i' and 'L' are black, while the 'è' is red and the 'D' is black. The logo is positioned in the lower right area of the page, partially overlapping the worker's arm.


i-LèD

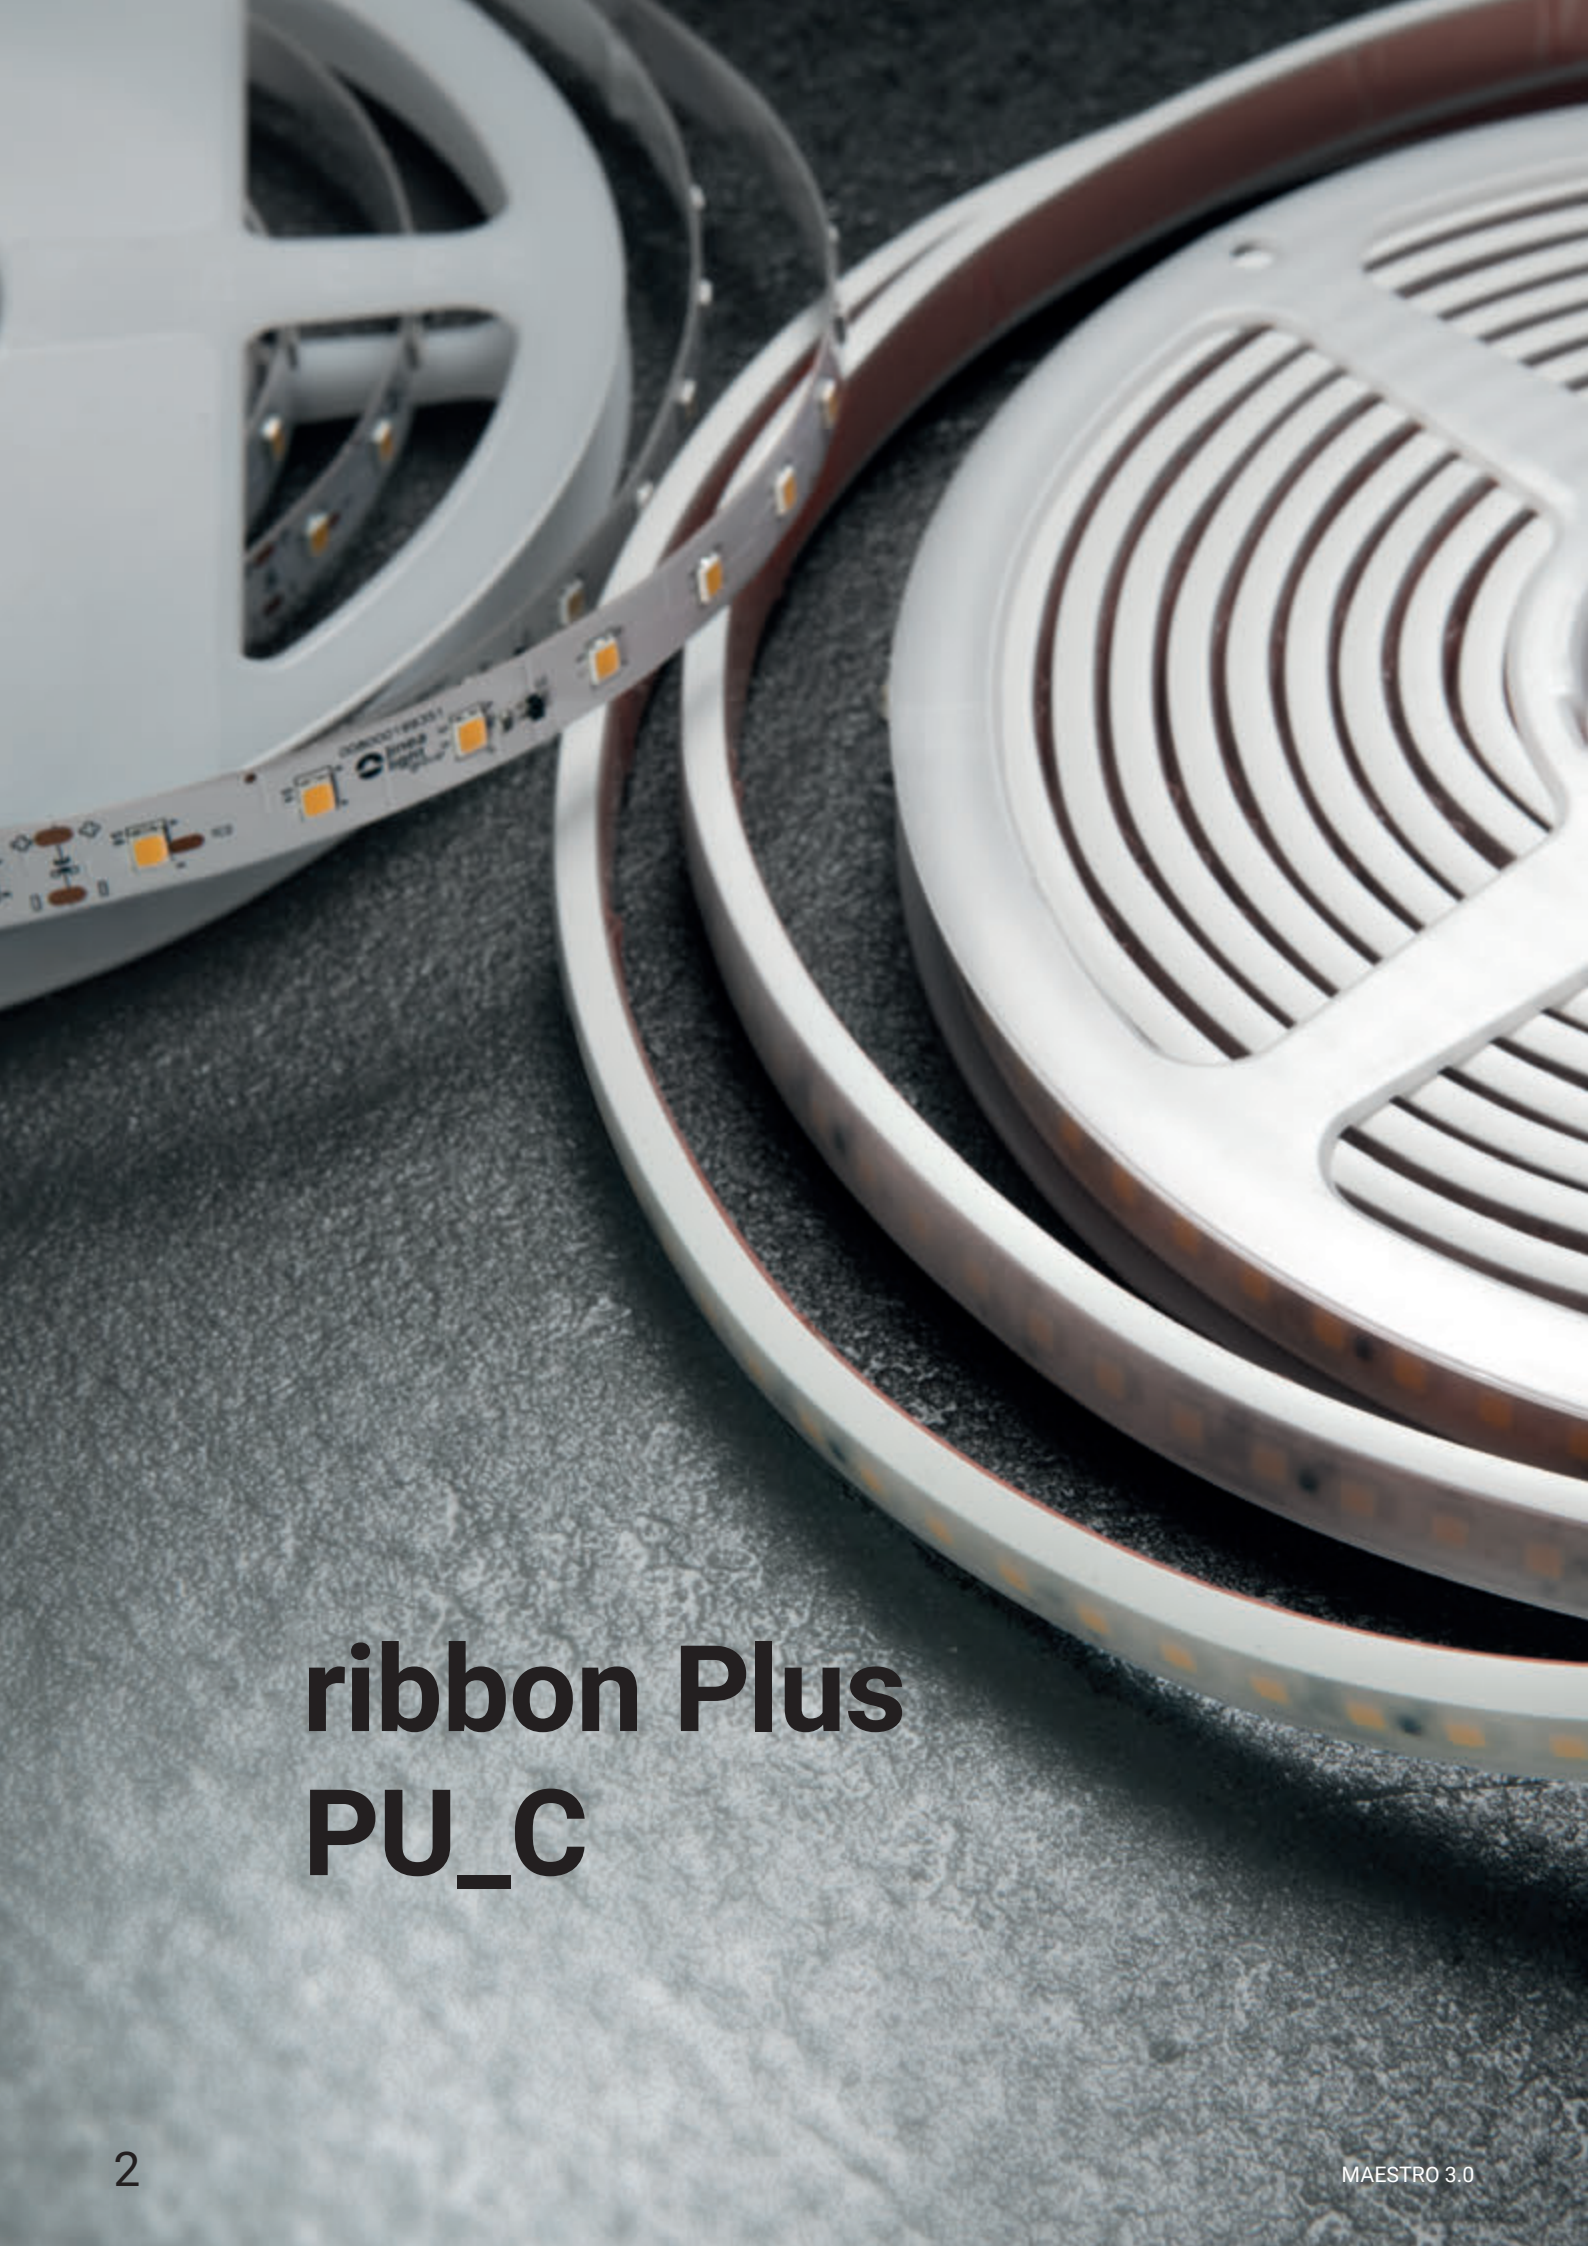

ribbon Plus PU_C



QUALITY, MATERIAL, SECURITY MEASURE, TEST AND CONTROL SPEAK ONLY ONE LANGUAGE

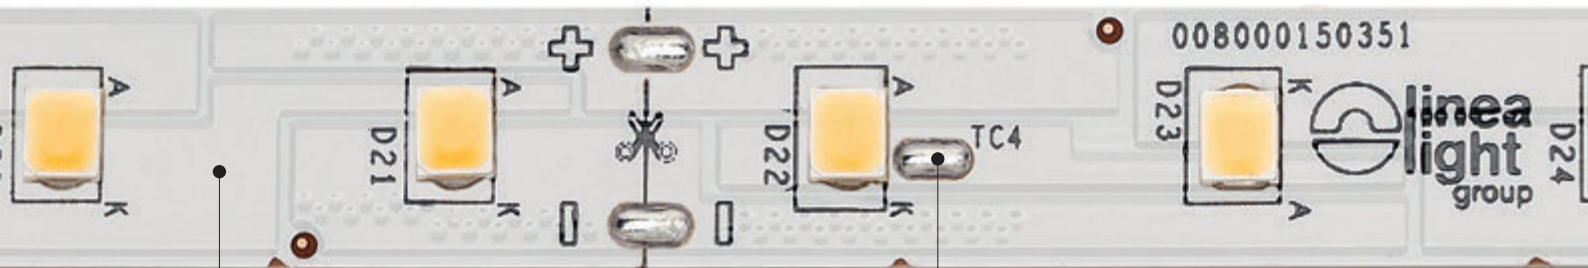

Quality

Rubber and Strip, like all the Light Group Line products, are certified and guaranteed for 3 years and up to 5 upon request. The various types, colour temperatures, and power, thanks to a short and controlled supply chain totally Made in Italy, are available immediately. The company is ISO 9001 certified. The materials and components used for the creation of our products are guaranteed by international certifying bodies such as IMQ and UL, and are marked and tested in accordance with EC standards.





Material

All the material used to create Rubber and Strip is of very high quality. Rubber has its structure in stabilised polyurethane and the diffuser in polyurethane resin, which guarantees maximum flexibility and versatility thanks to the quality raw materials used. Strip LED is covered in polyurethane, a material capable of resisting stresses and high temperatures. In addition, they are all prepared to resist ageing and yellowing over time. The copper used for the circuits, which is 99.9% pure, guarantees the perfect continuity of the electronic connections. The Flex Light range is by its very nature self-dissipating, it does not need additional dissipating bodies or systems.




Dissipation

Rubber is made up of different materials: the structure in polyurethane and the diffuser in polyurethane resin. Strip is coated in silicone. Like all plastic materials, these are also subject to chromatic and physical variations over time. Linea Light Group has selected materials that prevent these side effects. The purpose of the UV rays test is to predict ageing in the products, simulating extreme conditions (up to 80°C) and thermal shocks. This allows us to guarantee the material and their performance over time.

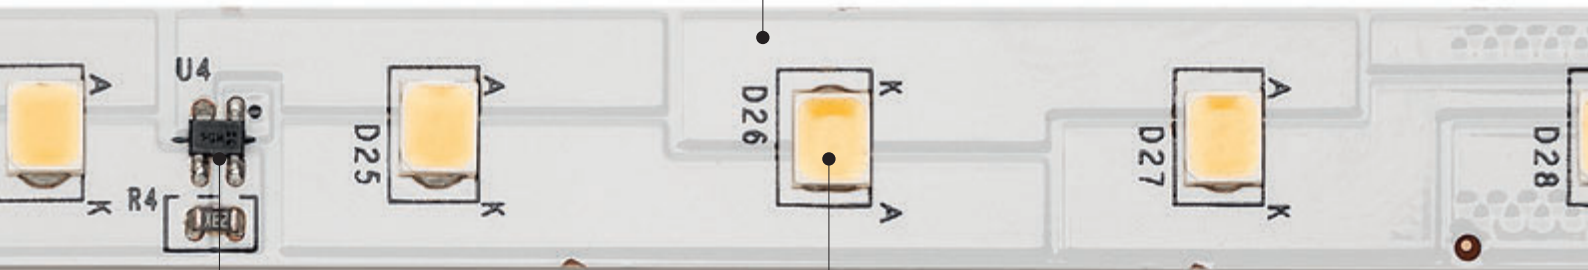

IC regulators

The entire Flex Light range has a reverse polarity system, which works as a guarantee and protection in case of assembly with reversed poles. Furthermore, the presence of IC regulators guarantee light uniformity and homogeneity the entire installed length.




Test e control

Rubber and Strip LEDs have been designed and created to ensure the best visual comfort possible. The entire range is set up to support the circadian rhythm, simply by regulating the light intensity and the colour temperature gradually from 3000 K to 6000 K. This makes it possible to control the melatonin and set the cortisol, both indispensable for the visual and vital well-being of man. Moreover, the numerous tests serve as guarantee of durability and retention of the efficacy and quality of the light, factors of great importance in closed or protected environments, such as offices or hospitals.




Ribbon Plus 70 LEDs/m | LED strip | 3,2 W/m 24 V DC

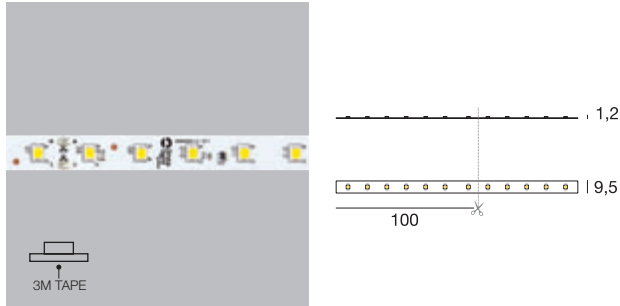

CRI 85 - 5 m 16W	Cct	lm S - D
98635	2700	1970 - On req
98636	3000	2140 - On req
98637	4000	2309 - On req

99374	99331	99332	83062	99787
ON/OFF 75 W p 210 x 148 x h 25	ON/OFF 150 W p 150 x 160 x h 35	0/1-10V 150 W p 150 x 160 x h 35	DALI PUSH 150 W p 280 x 143 x h 30	DALI 240 W p 244 x 171 x h 38


Ribbon Plus 140 LEDs/m | LED strip | 7,2 W/m 24 V DC

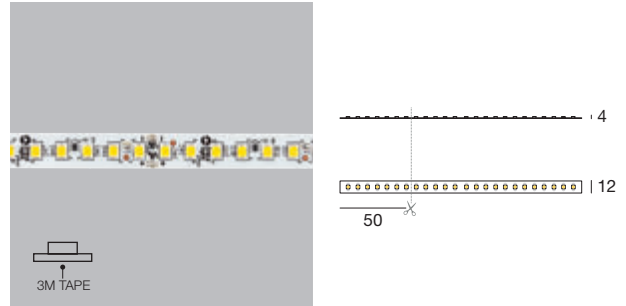

CRI 85 - 5 m 36W	Cct	lm S - D
98945	2700	4115 - On req
98946	3000	4400 - On req
98948	4000	4490 - On req

99374	99331	99332	83062	99787
ON/OFF 75 W p 210 x 148 x h 25	ON/OFF 150 W p 150 x 160 x h 35	0/1-10V 150 W p 150 x 160 x h 35	DALI PUSH 150 W p 280 x 143 x h 30	DALI 240 W p 244 x 171 x h 38


Ribbon Plus Hi-Flux 70 LEDs/m | LED strip | 12,6 W/m 24 V DC

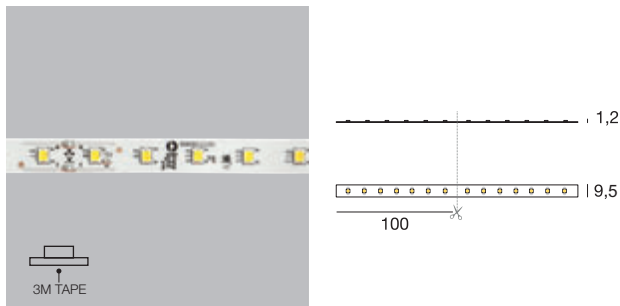

CRI 85 - 5 m 63W	Cct	lm S - D
98638	2700	7375 - On req
98639	3000	7975 - On req
98640	4000	8550 - On req

99374	99331	99332	83062	99787
ON/OFF 75 W p 210 x 148 x h 25	ON/OFF 150 W p 150 x 160 x h 35	0/1-10V 150 W p 150 x 160 x h 35	DALI PUSH 150 W p 280 x 143 x h 30	DALI 240 W p 244 x 171 x h 38

Ribbon Plus 140 Hi-Flux LEDs/m | LED strip | 25 W/m 24 V DC

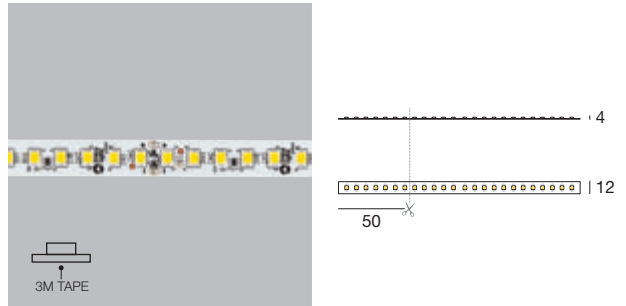

CRI 85 - 5 m 125W	Cct	lm S - D
81956	2700	11500 - On req
81957	3000	12050 - On req
81958	4000	12500 - On req

99331	99332	83062	99787
ON/OFF 150 W p 150 x 160 x h 35	0/1-10V 150 W p 150 x 160 x h 35	DALI PUSH 150 W p 280 x 143 x h 30	DALI 240 W p 244 x 171 x h 38

Ribbon Plus WT 70+70 LEDs/m | LED strip | 13 W/m 24 V DC



CRI 85 - 5 m 65W
99671 1800-3000 K

99694+99700	99331	99278	DMX	99331
Dimmer RF	CV 24V 150 W p 150 x l 60 x h 35	Dimmer DMX	DMX Controllers Pag. 952 - 953	CV 24V 150 W p 150 x l 60 x h 35


Ribbon Plus Dynamic White 70+70 LEDs/m | LED strip | 12,8 W/m 24 V DC



CRI 85 - 5 m 64W
99672 1800-5000 K

99695+99701	99331	99278	DMX	99331
Dimmer RF	CV 24V 150 W p 150 x l 60 x h 35	Dimmer DMX	DMX Controllers Pag. 952 - 953	CV 24V 150 W p 150 x l 60 x h 35


Ribbon Plus RGBW | LED strip 60+60 LEDs/m | 19,6 W/m 24 V DC

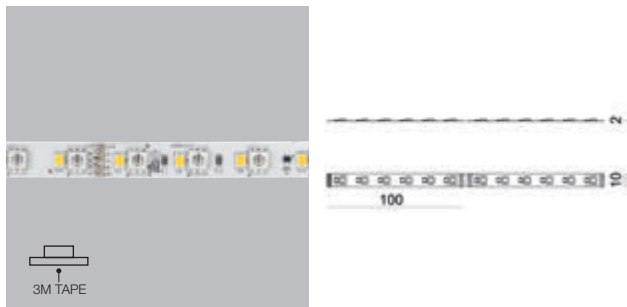

5 m 98W
99670 RBGW - 3000 K (CRI 85)

99696+99702	99331	99278	DMX	99331
Dimmer RF	CV 24V 150 W p 150 x l 60 x h 35	Dimmer DMX	DMX Controllers Pag. 952 - 953	CV 24V 150 W p 150 x l 60 x h 35


PU_C Plus 70 LEDs/m | LED strip | 3,2 W/m 24 V DC

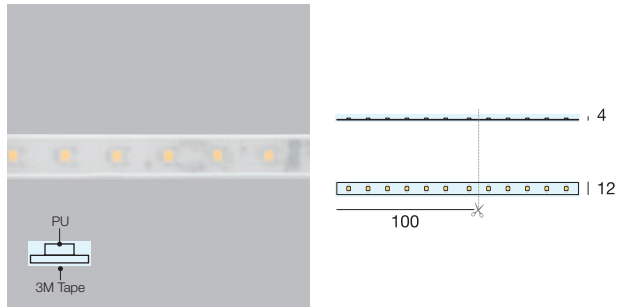

CRI 85 - 5 m 16W	Cct	lm S - D
98774	2700	2070 - 1495
98776	3000	2245 - 1625
98775	4000	2425 - 1895

99374	99331	99332	83062	99787
ON/OFF 75 W p 210 x 148 x h 25	ON/OFF 150 W p 150 x 160 x h 35	0/1-10V 150 W p 150 x 160 x h 35	DALI PUSH 150 W p 280 x 143 x h 30	DALI 240 W p 244 x 171 x h 38


PU_C Plus 140 LEDs/m | LED strip | 7,2 W/m 24 V DC

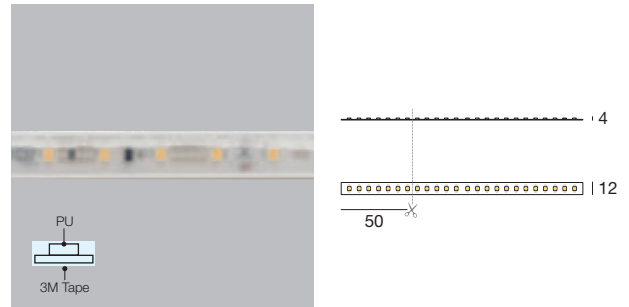

CRI 85 - 5 m 36W	Cct	lm S - D
81959	2700	4315 - 3450
81960	3000	4615 - 3700
81961	4000	4715 - 3775

99374	99331	99332	83062	99787
ON/OFF 75 W p 210 x 148 x h 25	ON/OFF 150 W p 150 x 160 x h 35	0/1-10V 150 W p 150 x 160 x h 35	DALI PUSH 150 W p 280 x 143 x h 30	DALI 240 W p 244 x 171 x h 38


PU_C Plus Hi-Flux 70 LEDs/m | LED strip | 12,6 W/m 24 V DC

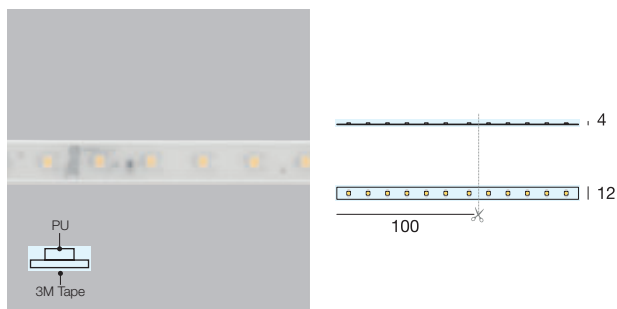

CRI 85 - 5 m 63W	Cct	lm S - D
98777	2700	7745 - 5890
98779	3000	8385 - 6495
98778	4000	8980 - 6935

99374	99331	99332	83062	99787
ON/OFF 75 W p 210 x 148 x h 25	ON/OFF 150 W p 150 x 160 x h 35	0/1-10V 150 W p 150 x 160 x h 35	DALI PUSH 150 W p 280 x 143 x h 30	DALI 240 W p 244 x 171 x h 38


PU_C Plus 140 Hi-Flux LEDs/m | LED strip | 25 W/m 24 V DC

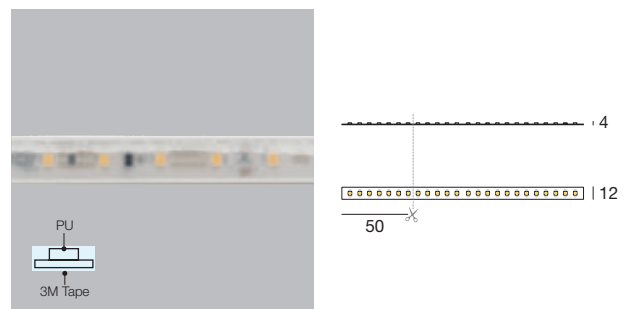

CRI 85 - 5 m 125W	Cct	lm S - D
81962	2700	12080 - 9000
81963	3000	12655 - 9550
81964	4000	13130 - 10000

99374	99331	99332	83062	99787
ON/OFF 75 W p 210 x 148 x h 25	ON/OFF 150 W p 150 x 160 x h 35	0/1-10V 150 W p 150 x 160 x h 35	DALI PUSH 150 W p 280 x 143 x h 30	DALI 240 W p 244 x 171 x h 38

PU_C RGBW 60+60 LEDs/m | LED strip | 19,6 W/m 24 V DC

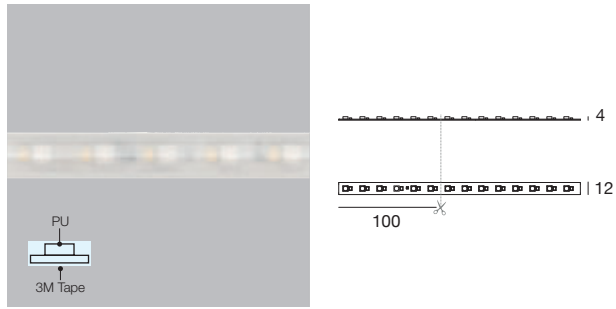


5 m 98W
81965 | RGBW - 3000 K (CRI 85)

99696+99702	99331	99278	DMX	99331
Dimmer RF	CV 24V 150 W p 150 x 160 x h 35	Dimmer DMX	DMX Controllers Pag. 952 - 953	CV 24V 150 W p 150 x 160 x h 35

Cables

PU_C | Extension + connector



	description
98947	Conn. M. 5 pin (L 0,25 m) + conn. F. 5 pin (L 1 m)
suitable for: PU_C	


PU_C | Extension + connector



	description
99542	Conn. M. 2 pin (L 0,25 m) + conn. F. 2 pin (L 1 m)
suitable for: PU_C	

Accessories

PU_C Plus | Fixing kit



	description
98964	1 x glue 20 x brackets 40 x M3x25 screws 10 x caps
suitable for: 5 m PU_C	

PU_C Plus | Fixing brackets




	description
89223	10 x brackets 20 x M3x25 screws
suitable for: 5 m PU_C	

ribbon dropper silicone_C






Ribbon Basic 60 LEDs/m | LED strip | 4,8 W/m 24 V DC

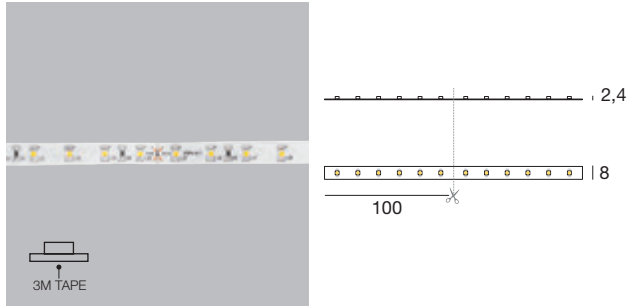


CRI 80 - 5 m 25W	Cct	lm S - D
98011	2700	1800 - On req
98556	3000	1825 - On req
98012	4000	1850 - On req

Ribbon 120 LEDs/m | LED strip | 9,6 W/m 24 V DC

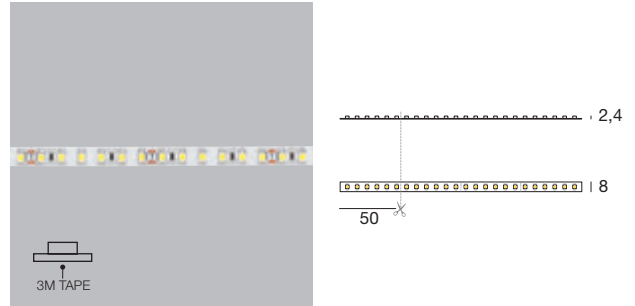


CRI 80 - 5 m 48W	Cct	lm S - D
83659	2700	4250 - On req
83657	3000	4400 - On req
83658	4000	4800 - On req

Ribbon Hi-Flux 60 LEDs/m | LED strip | 12 W/m 24 V DC

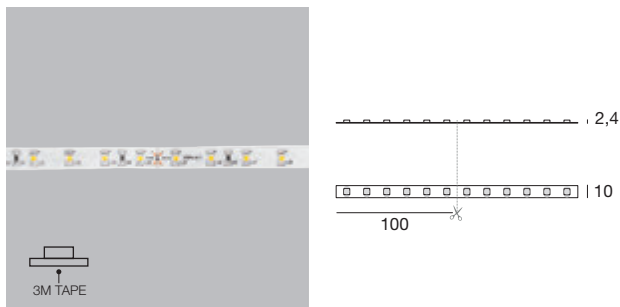


CRI 80 - 5 m 60W	Cct	lm S - D
99608	2700	4900 - On req.
99612	3000	5100 - On req.
99610	4000	5500 - On req.

Ribbon 240 LEDs/m | LED strip | 19,2 W/m 24 V DC

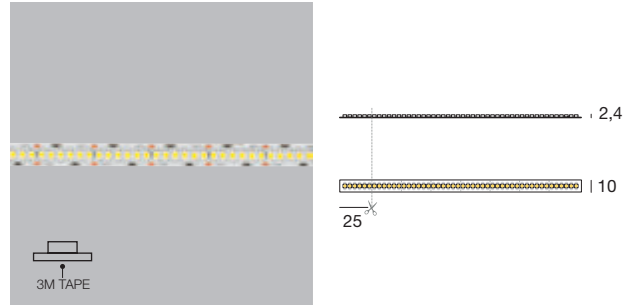


CRI 80 - 5 m 96W	Cct	lm S - D
98084	2700	7200 - On req
98570	3000	7250 - On req
98083	4000	7400 - On req

Ribbon 120 LEDs/m | LED strip | 12 W/m 24 V DC

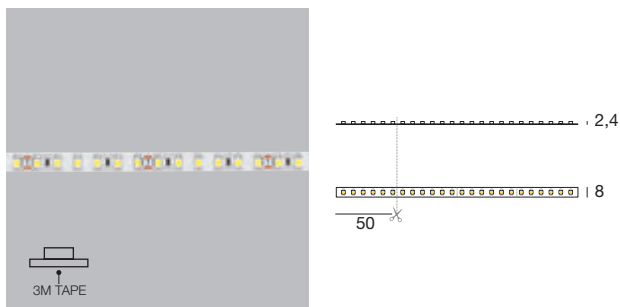

CRI 80 - 5 m 60W	Cct	lm S - D
98078	2700	4900 - On req
98568	3000	5100 - On req
98077	4000	6000 - On req

Ribbon Slim 120 LEDs/m | LED strip | 9,6 W/m 24 V DC

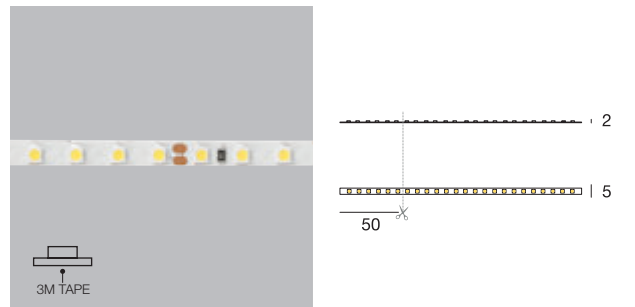


CRI 80 - 5 m 48W	Cct	lm S - D
84219	2700	3350 - On req
84220	3000	3450 - On req
84221	4000	3750 - On req

Electronics

99374	99331	99332	83062	99787
ON/OFF 75 W p 210 x 148 x h 25	ON/OFF 150 W p 150 x 160 x h 35	0/1-10V 150 W p 150 x 160 x h 35	DALI PUSH 150 W p 280 x 143 x h 30	DALI 240 W p 244 x 171 x h 38


Ribbon Hi-Flux 150 LEDs/m | LED strip | 20 W/m 48 V DC

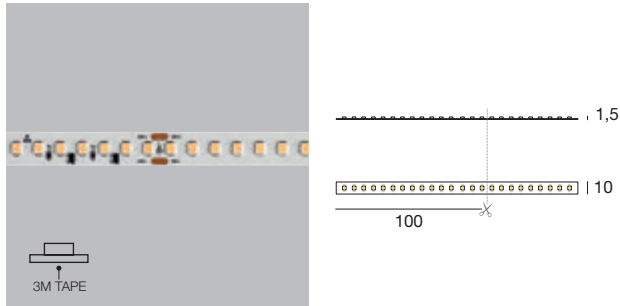

CRI 95 - 10 m 200W	Cct	lm S - D
84195	3000	17250 - On req
84196	4000	19500 - On req

99784	99785	83179	Switching	83177
ON/OFF 150W CV 48V	ON/OFF 240W CV 48V	DALI 150W CV 48V	Switching CV 48V Pag. 932	Dimmer DMX 312W


Ribbon RGB 60 LEDs/m | LED strip | 14,4 W/m 24 V DC

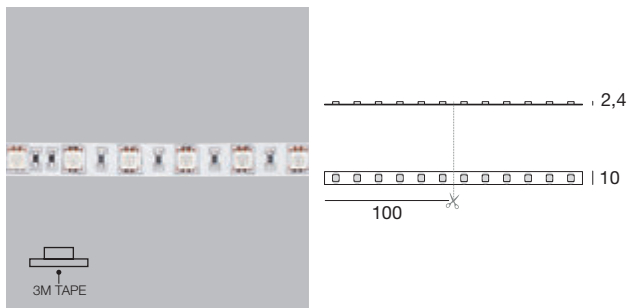

5 m 72W	98017	RGB
---------	-------	-----

99696+99702	99331	99278	DMX	99331
Dimmer RF	CV 24V 150 W p 150 x l 60 x h 35	Dimmer DMX	DMX Controllers Pag. 952 - 953	CV 24V 150 W p 150 x l 60 x h 35


Ribbon RGBW 54 LEDs/m | LED strip | 13,5 W/m 48 V DC

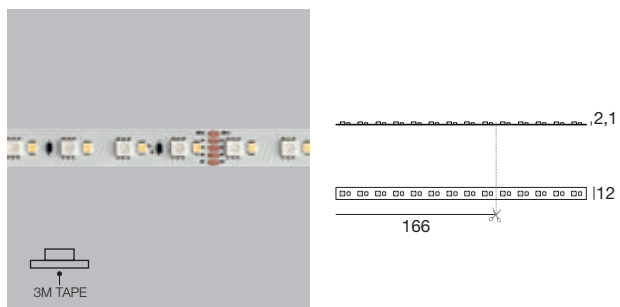

CRI 80 - 5 m 67,5W	84197	84198
	RGBW - 3000 K (CRI 80)	RGBW - 4000 K (CRI 80)

99784	99785	Switching	83178
ON/OFF 150W CV 48V	ON/OFF 240W CV 48V	Switching CV 48V Pag. 932	Dimmer DMX 384W


Ribbon Dynamic White 60+60 LEDs/m | LED strip | 19,2 W/m 24 V DC

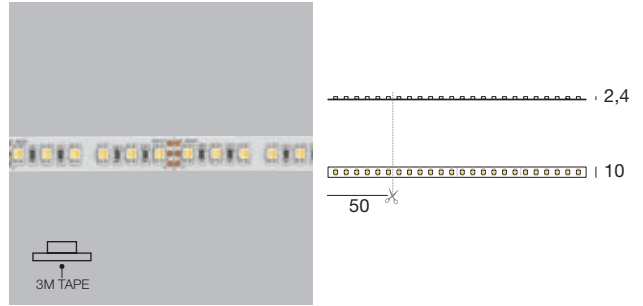

CRI 85 - 5 m 96W	98548
	3000 - 6000 K

99695+99701	99331	99278	DMX	99331
Dimmer RF	CV 24V 150 W p 150 x l 60 x h 35	Dimmer DMX	DMX Controllers Pag. 952 - 953	CV 24V 150 W p 150 x l 60 x h 35


Dropper Basic 60 LEDs/m | LED strip | 5 W/m 24 V DC

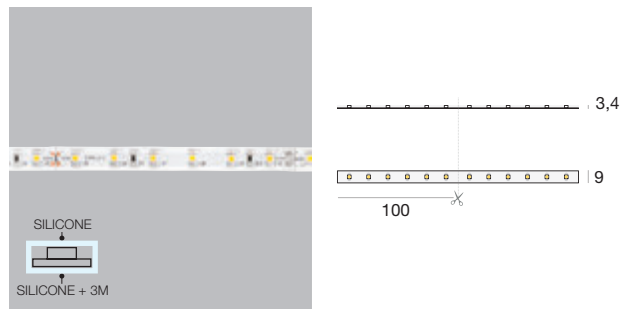

CRI 80 - 5 m 25W	Cct	lm S - D
99588	2700	2300 - On req
99592	3000	2400 - On req
99590	4000	2500 - On req

*** Electronics**


Dropper Hi-Flux 60 LEDs/m | LED strip | 12 W/m 24 V DC

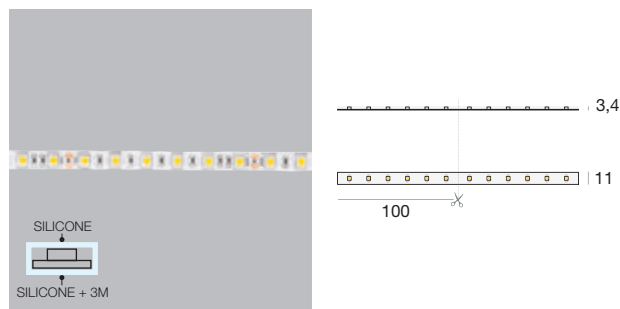

CRI 80 - 5 m 60W	Cct	lm S - D
99628	2700	4750 - On req
99632	3000	4875 - On req
99630	4000	5250 - On req

*** Electronics**


Dropper Hi-Flux 60 LEDs/m | LED strip | 14,4 W/m 24 V DC

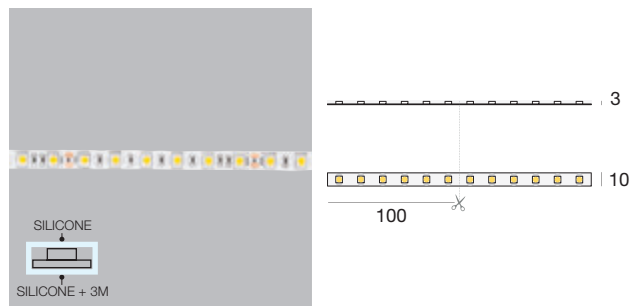

CRI 80 - 5 m 72W	Cct	lm S - D
98092	2700	5400 - On req

*** Electronics**


Dropper 120 LEDs/m | LED strip | 9,6 W/m 24 V DC

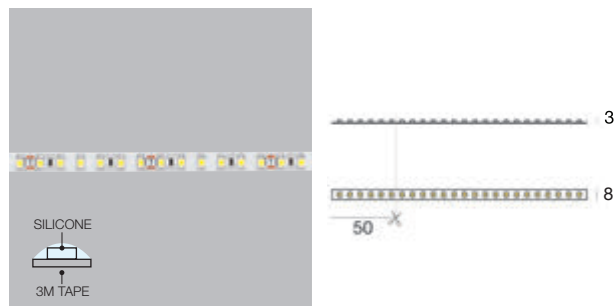

CRI 80 - 5 m 48W	Cct	lm S - D
98572	3000	3610 - On req
98574	4000	3700 - On req

*** Electronics**

Dropper RGB 60 LEDs/m | LED strip | 14,4 W/m 24 V DC

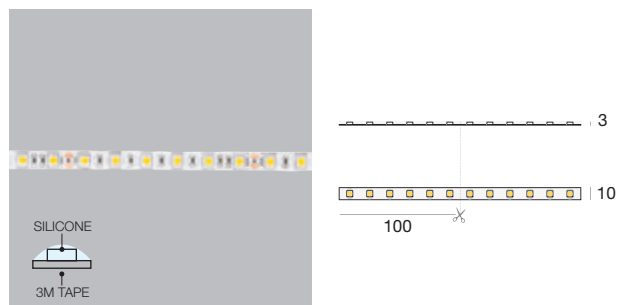


5 m 72W	
98025	RGB

**** Electronics**

*	99374	99331	99332	83062	99787
	ON/OFF 75 W p 210 x l 148 x h 25	ON/OFF 150 W p 150 x l 60 x h 35	0/1-10V 150 W p 150 x l 60 x h 35	DALI PUSH 150 W p 280 x l 43 x h 30	DALI 240 W p 244 x l 71 x h 38

**	99696+99702	99331	99278	DMX	99331
	Dimmer RF	CV 24V 150 W p 150 x l 60 x h 35	Dimmer DMX	DMX Controllers Pag. 952 - 953	CV 24V 150 W p 150 x l 60 x h 35


Silicone_C Basic 60 LEDs/m | LED strip | 5 W/m 24 V DC

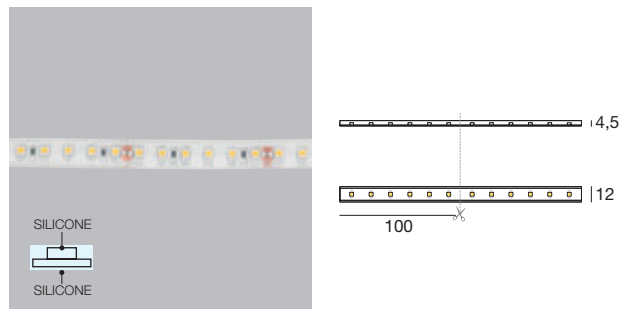

CRI 80 - 5 m 25W	Cct	lm S - D
99598	2700	2250 - On req
99602	3000	2300 - On req
99600	4000	2400 - On req

★ Electronics


Silicone_C Hi-Flux 60 LEDs/m | LED strip | 12 W/m 24 V DC

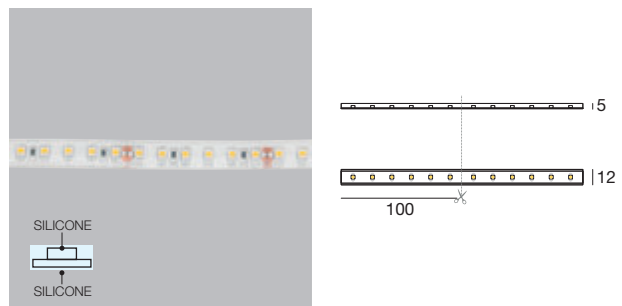

CRI 80 - 5 m 60W	Cct	lm S - D
99622	3000	4750 - On req
99620	4000	5100 - On req

★ Electronics


Silicone_C Hi-Flux 60 LEDs/m | LED strip | 14,4 W/m 24 V DC

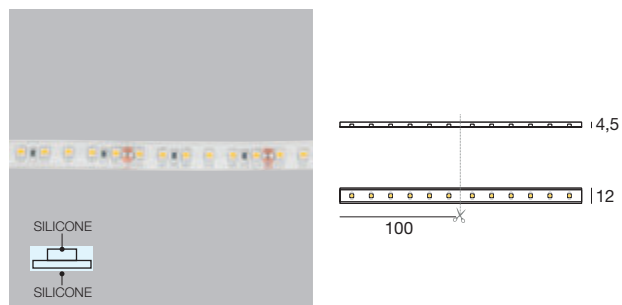

CRI 80 - 5 m 72W	Cct	lm S - D
98042	2700	5400 - On req.

★ Electronics


Silicone_C 120 LEDs/m | LED strip | 14,4 W/m 24 V DC

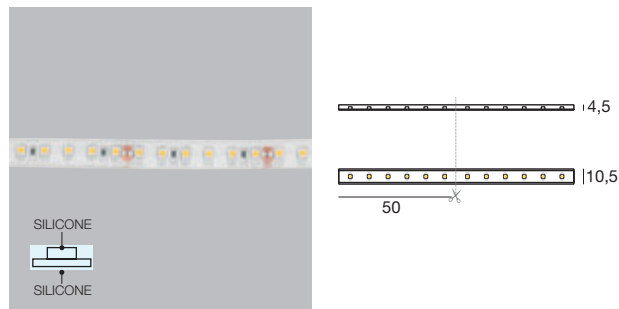

CRI 80 - 5 m 72W	Cct	lm S - D
62403	3000	7230 - On req
62403N	4000	7495 - On req

★ Electronics


Silicone_C Basic RGB 60 LEDs/m | LED strip | 14,4 W/m 24 V DC

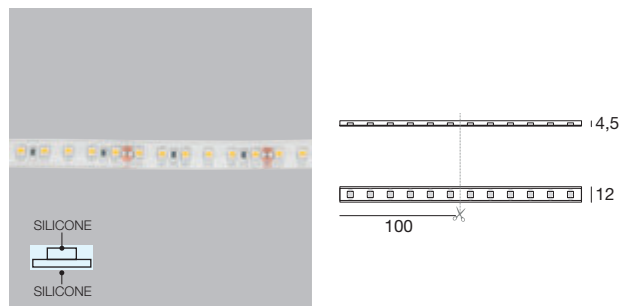

5 m 72W	
98033	RGB

★★ Electronics

Silicone_C | Fixing kit



	description
98373	1 x glue 20 x brackets 40 x M3x25 screws 10 x caps

suitable for: 5 m Silicone_C

Silicone_C | Fixing brackets



	description
89223	10 x brackets 20 x M3x25 screws

suitable for: 5 m Silicone_C

★	99374	99331	99332	83062	99787
	ON/OFF 75 W p 210 x 148 x h 25	ON/OFF 150 W p 150 x 160 x h 35	0/1-10V 150 W p 150 x 160 x h 35	DALI PUSH 150 W p 280 x 143 x h 30	DALI 240 W p 244 x 171 x h 38

★★	99696+99702	99331	99278	DMX	99331
	Dimmer RF	CV 24V 150 W p 150 x 160 x h 35	Dimmer DMX	DMX Controllers Pag. 952 - 953	CV 24V 150 W p 150 x 160 x h 35

LED Strips | Multiple outlet cable



	connector	L mm	sec. Ø	available for
89121	F	300	2 x 0,35 mm ²	Ribbon mono
				Dropper mono

LED Strips | Extension for multiple outlets



	connector	L mm	sec. Ø	available for
89123	M + F	1000	2 x 0,35 mm ²	Ribbon mono
89125	M + F	3000	2 x 0,35 mm ²	Dropper mono

LED Strips | Quick connector



	connector	L mm	sec. Ø	available for
98384	1 clip	150	2 x 0,35 mm ²	Ribbon basic mono
				Ribbon Hi-Flux mono

LED Strips | Extension of the quick connector



	connector	L mm	sec. Ø	available for
98379	2 clip	150	2 x 0,70 mm ²	Ribbon basic mono
				Ribbon Hi-Flux mono

LED Strips | Quick connector joint



	connector	available for
98383	2 clip	Ribbon basic mono
		Ribbon Hi-Flux mono
		Ribbon basic RGB
		Ribbon Hi-Flux RGB

LED Strips | Multiple outlet cable



	connector	L mm	sec. Ø	available for
89119	6 M	1000	2 x 0,35 mm ²	Ribbon basic mono
				Dropper mono

LED Strips | Extension for multiple outlets



	connector	sec. Ø	available for
99357	F	3 x 0,35 mm ²	Ribbon Dynamic White
99358	M	3 x 0,35 mm ²	Ribbon Dynamic White

LED Strips | Extension for multiple outlets



	connector	L mm	sec. Ø	available for
98551	M + F	1000 m	3 x 0,35 mm ²	Ribbon Dynamic White
98552	M + F	3000 m	3 x 0,35 mm ²	Ribbon Dynamic White

RGB Strips | Multiple outlet cable



	connector	L mm	sec. Ø	available for
89122	F	300	4 x 0,35 mm ²	Ribbon RGB Dropper RGB

RGB Strips | Extension for multiple outlets



	connector	L mm	sec. Ø	available for
89124	M + F	1000	2 x 0,35 mm ²	Ribbon RGB

LED Strips | IP66 cable



	connector	L mm	sec. Ø	available for
89629	1 M	1000	2 x 0,75 mm ²	Silicone_C mono

LED Strips | IP66 extension



	connector	L mm	sec. Ø	available for
99000	1 F	2000	2 x 0,75 mm ²	Silicone_C mono

RGB Strips | IP66 cable




	connector	L mm	sec. Ø	available for
89630	1 M	2000	4 x 0,35 mm ²	Silicone_C RGB

RGB Strips | IP66 extension



	connector	L mm	sec. Ø	available for
99001	1 F	2000	4 x 0,35 mm ²	Silicone_C RGB

Vojo_17/08 | Low surface profile | Indoor LED Strips

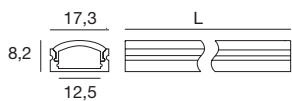

		L mm	
Anod. AL	98891	2000	Profilo - Profile
Black	83129	2000	Profilo - Profile
Transp.	98941	2000	Diffusore - Diffuser
Satinized	98942	2000	Diffusore - Diffuser
Opaline	98943	2000	Diffusore - Diffuser
Black	83132	2000	Diffusore - Diffuser
	98892	2 x	Tappi - Caps
Black	83133	2 x	Tappi - Caps
	98944	5 x	Staffe - Brackets

KIT composition


98954	98955
1 x (98891-98943 98892-98944)	10 x (98891 98943)

KIT composition Black

84446	84447
1 x (83129-83132 83133-98944)	10 x (83129 83132)

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper

Vojo_17/08 | Low surface profile | Indoor LED Strips




		L mm	
Anod. AL	98891	2000	Profilo - Profile
Satinized	98925	2000	Diffusore - Diffuser (90°)
	98928	2 x	Tappi - Caps
	98944	5 x	Staffe - Brackets

KIT composition

99983	99984
1 x (98891-98925 98928-98944)	10 x (98891 98925)

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper

Luno_20/27 | High square surface profile | Indoor LED Strips

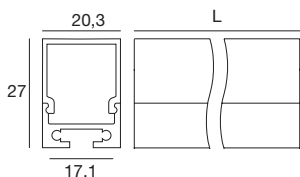

		L mm	
Anod. AL	98929	2000	Profilo - Profile
Black	83137	2000	Profilo - Profile
Opaline	98930	2000	Diffusore - Diffuser
Black	83138	2000	Diffusore - Diffuser
	98932	2 x	Tappi - Caps
Black	83139	2 x	Tappi - Caps
	98931	5 x	Staffe - Brackets

KIT composition


84452	99986
1 x (98929-98930 98932-98931)	10 x (98929 98930)

KIT composition Black

84450	84451
1 x (83137-83138 83139-98931)	10 x (83137 83138)

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper

Luno_20/27 | High round surface profile | Indoor LED Strips

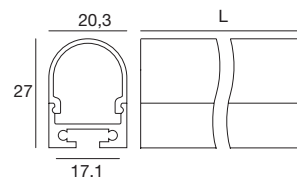

		L mm	
Anod. AL	98929	2000	Profilo - Profile
Black	83137	2000	Profilo - Profile
Opaline	98934	2000	Diffusore - Diffuser
Black	83183	2000	Diffusore - Diffuser
	98936	2 x	Tappi - Caps
Black	83184	2 x	Tappi - Caps
	98931	5 x	Staffe - Brackets

KIT composition


84453	99988
1 x (98929-98934 98936-98931)	10 x (98929 98934)

KIT composition Black

84454	84455
1 x (83137-83183 83184-98931)	10 x (83137 83183)

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper

Rive_17/16 | High surface profile | Indoor LED Strips


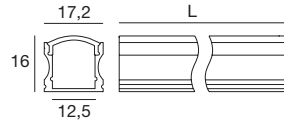


		L mm	
Anod. AL	98893	2000	Profilo - Profile
Black	83130	2000	Profilo - Profile
Transp.	98941	2000	Diffusore - Diffuser
Satinized	98942	2000	Diffusore - Diffuser
Opaline	98943	2000	Diffusore - Diffuser
Black	83132	2000	Diffusore - Diffuser
	98894	2 x	Tappi - Caps
Black	83135	2 x	Tappi - Caps
	98944	5 x	Staffe - Brackets


KIT composition		KIT composition Black	
99905	99906	84448	84449
1 x (98893-98943 98894-98944)	10 x (98893 98943)	1 x (83130-83132 83135-98944)	10 x (83130 83132)

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper - Silicone_C - PU_C Plus

Example with black profile + black diffuser.

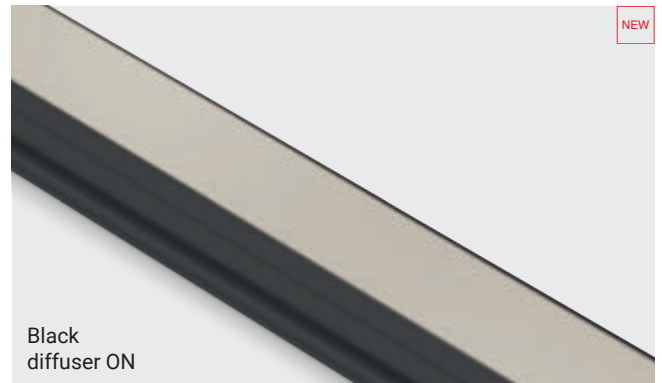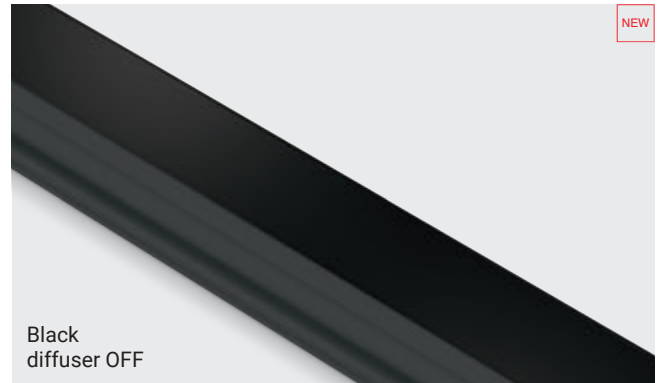

Sageto_24/08 | Low recessed profile | Indoor LED Strips




		L mm	
Anod. AL	98895	2000	Profilo - Profile
Transp.	98941	2000	Diffusore - Diffuser
Satinized	98942	2000	Diffusore - Diffuser
Opaline	98943	2000	Diffusore - Diffuser
	98896	2 x	Tappi - Caps
	98944	5 x	Staffe - Brackets

KIT composition	
98965	99907
1 x (98895-98943 98896-98944)	10 x (98895 98943)

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper

Roko_33/15 | Low recessed profile | Indoor LED Strips




		L mm	
Anod. AL	98897	2000	Profilo - Profile
Transp.	98898	2000	Diffusore - Diffuser
Satinized	98899	2000	Diffusore - Diffuser
Opaline	98900	2000	Diffusore - Diffuser
	98902	2 x	Tappi - Caps
	98901	5 x	Staffe - Brackets

KIT composition	
99908	
1 x (98897-98900 98902-98901)	

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper - Silicone_C - PU_C Plus

Ghost_64/14 | Low integrated profile | Indoor LED Strips



		L mm	
Anod. Al.	98906	2000	Profilo - Profile
Transp.	98898	2000	Diffusore - Diffuser
Satinized	98899	2000	Diffusore - Diffuser
Opaline	98900	2000	Diffusore - Diffuser
	98907	2 x	Tappi - Caps


KIT composition

99989

1 x (98906-98900
98907)

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper - Silicone_C - PU_C Plus


Armita_58/15 | Integrated linear profile | Indoor LED Strips



		L mm	
Anod. Al.	98916	2000	Profilo - Profile
Opaline	98917	2000	Diffusore - Diffuser
	98918	2 x	Tappi - Caps

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper


Papilio_41/41 | Integrated corner profile | Indoor LED Strips



		L mm	
Anod. Al.	98919	2000	Profilo - Profile
Opaline	98917	2000	Diffusore - Diffuser
	98920	2 x	Tappi - Caps

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper


Tabulo_35/14 | Integrated side profile | Indoor LED Strips



		L mm	
Anod. Al.	98921	2000	Profilo - Profile
Opaline	98917	2000	Diffusore - Diffuser
	98922	2 x	Tappi - Caps

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper

Ribba_09/15 | High slim surface profile | Indoor LED Strips

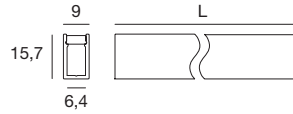

		L mm	
Anod. AL	98908	2000	Profilo - Profile
Opaline	98909	2000	Diffusore - Diffuser
	98911	2 x	Tappi - Caps
	98910	5 x	Staffe - Brackets


KIT composition

99998

10 x (98908
90909)

Compatible with: Ribbon slim

Fonis_06/11 | Low slim surface profile | Indoor LED Strips

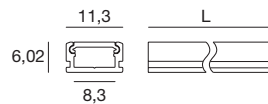

		L mm	
Anod. AL	98885	2000	Profilo - Profile
Transp.	98886	2000	Diffusore - Diffuser
Satinized	98887	2000	Diffusore - Diffuser
Opaline	98888	2000	Diffusore - Diffuser
	98890	2 x	Tappi - Caps
	98889	5 x	Staffe - Brackets


KIT composition

83003 **83004**

1 x (98885-98888) 10 x (98885
98890-98889) 98888)

Compatible with: Ribbon slim

Alise_10/10 | Square slim surface profile | Indoor LED Strips

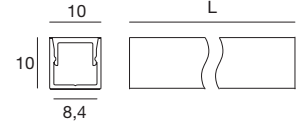

		L mm	
Anod. AL	98912	2000	Profilo - Profile
Opaline	98913	2000	Diffusore - Diffuser
	98915	2 x	Tappi - Caps
	98914	5 x	Staffe - Brackets


KIT composition

99998

10 x (98908
90909)

Compatible with: Ribbon slim

Suo_56/10 | Flat surface profile | Indoor LED Strips



		L mm	
Anod. AL	98937	2000	Profilo - Profile
Opaline	98938	2000	Diffusore - Diffuser
	98940	2 x	Tappi - Caps
	98939	5 x	Staffe - Brackets


KIT composition

83006

10 x (98937
98943)

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - PU_C Plus


Ozner_25/10 | Low surface profile | Indoor LED Strips



		L mm	
Anod. AL	98419	2000	Profilo - Profile
Opaline	98395	2000	Diffusore - Diffuser
	98418	2 x	Tappi - Caps
	98420	5 x	Staffe - Brackets

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper - Silicone_C - PU_C Plus

Svik_00/00 | Heat sink | Indoor LED Strips



		L mm	
Anod. AL	98956	2000	Dissipatore - Heat sink

KIT composition

10 x **99999**
99895

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper - Silicone_C - PU_C Plus

Cela_18/18 | Corner profile | Indoor LED Strips



		L mm	
Anod. AL	98903	2000	Profilo - Profile
Black	83131	2000	Profilo - Profile
Transp.	98941	2000	Diffusore - Diffuser
Satinized	98942	2000	Diffusore - Diffuser
Opaline	98943	2000	Diffusore - Diffuser
Black	83132	2000	Diffusore - Diffuser
	98905	2 x	Tappi - Caps
Black	83136	2 x	Tappi - Caps
	98904	5 x	Staffe - Brackets

KIT composition

99910
1 x (98903-98943
98905-98904)

99911
10 x (98903
98943)

KIT composition Black

84456
1 x (83131-83132
83136-98904)


84457
10 x (83131
83132)

Compatible with: Ribbon - Ribbon Plus - Ribbon slim - Dropper - PU_C Plus

Example with black profile + black diffuser.




Narp_12/12 | Slim profile kit | Indoor LED Strips



		L mm	
Anod. AL	63560L02	2000	Profilo + diffusore - Profile + diffuser

Compatible with: Ribbon - Dropper


Ice_14/11 | Low recessed profile | Indoor LED Strips

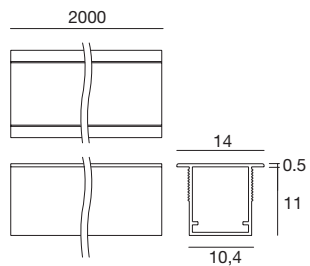

		L mm	
Opaline	99977	2000	Profilo - Profile
	99976	2 x	Tappi - Caps

Compatible with: Ribbon (max 8 mm) - Ribbon slim - Dropper (max 8 mm)

Ice_10/10 | Low square surface profile | Indoor LED Strips



		L mm	
Opaline	99979	2000	Profilo - Profile
	99978	2 x	Tappi - Caps
	98398	5 x	Clips di fissaggio - Fixing clips

Compatible with: Ribbon (max 8 mm) - Ribbon slim - Dropper (max 8 mm)

GavriiLux FourSeasons Astir | Greece



Addresses

Linea Light HQ Italy

via della Fornace, 59 z.i.
31023 Castelmolin di Resana (TV) - Italy
Phone: +39 0423 7868
Fax: +39 0423 786900
info@linealight.com

Linea Light Milano

via Morimondo, 26 int. 17G
20143 Milano - Italy
Phone: +39 02 36750915
Fax: +39 02 36750915
milano@linealight.com

Linea Light Roma

Via La Spezia, 34
00182 Roma - Italy
Phone: +39 06 68589134
info@linealightroma.com

Linea Light UK

Suite 109 - The Business Design Centre
52 Upper Street - Islington N10QH
London - UK
Phone: +44 0203 6371983
info@linealight-uk.com

Linea Light France

Z.A. Heiden Est, 12 rue des Pays-Bas
68310 Wittelsheim - France
Phone: +33 389 75 52 23
Fax: +33 389 75 59 07
info@linealight.fr

Linea Light Deutschland

Aktienstraße 214
45473 Mülheim Ruhr - Germany
Phone: +49 208 299979-0
Fax: +49 208 299979-10
service@linealight.de

Linea Light USA - Inter Lux

3741 Commerce Drive
Suites 306-308
Baltimore, MD 21227 - USA
Phone: +1 410 381 1497
Fax: +1 410 381 1589
answers@inter-lux.com

Linea Light Russia

Design Center Artplay
Nizhnyaya Syromyatnicheskaya 10/2 enter B,
3rd floor, office 14
105120 Moscow - Russia Federation
Phone: +7 495 639 9941
info@linealight.ru

Linea Light Spain

C/ Longares, 48
28022 Madrid - Spain
Phone: +34 912534773
info@linealight.es

Linea Light Singapore


21 Kaki Bukit Place, 5th Fl.
Eunos Techpark Singapore
416199 Singapore
Phone: +65-6908 5758
info.sg@linealight.com

Linea Light GCC

Jumeirah Lake Towers
JBC2 - 35th Floor Cluster V - Dubai - UAE
P.O. Box 125902
Phone: +971 4 4218275
Fax: +971 4 4218274
info@linealight.ae

Linea Light Asia - Pacific

No. 7, Nanyi Huayuan Road, Industry Avenue,
528478 Xiaolan Town, Zhongshan City,
Guangdong Province - China
Phone: +86 760 87618355
info@linealight.com.cn

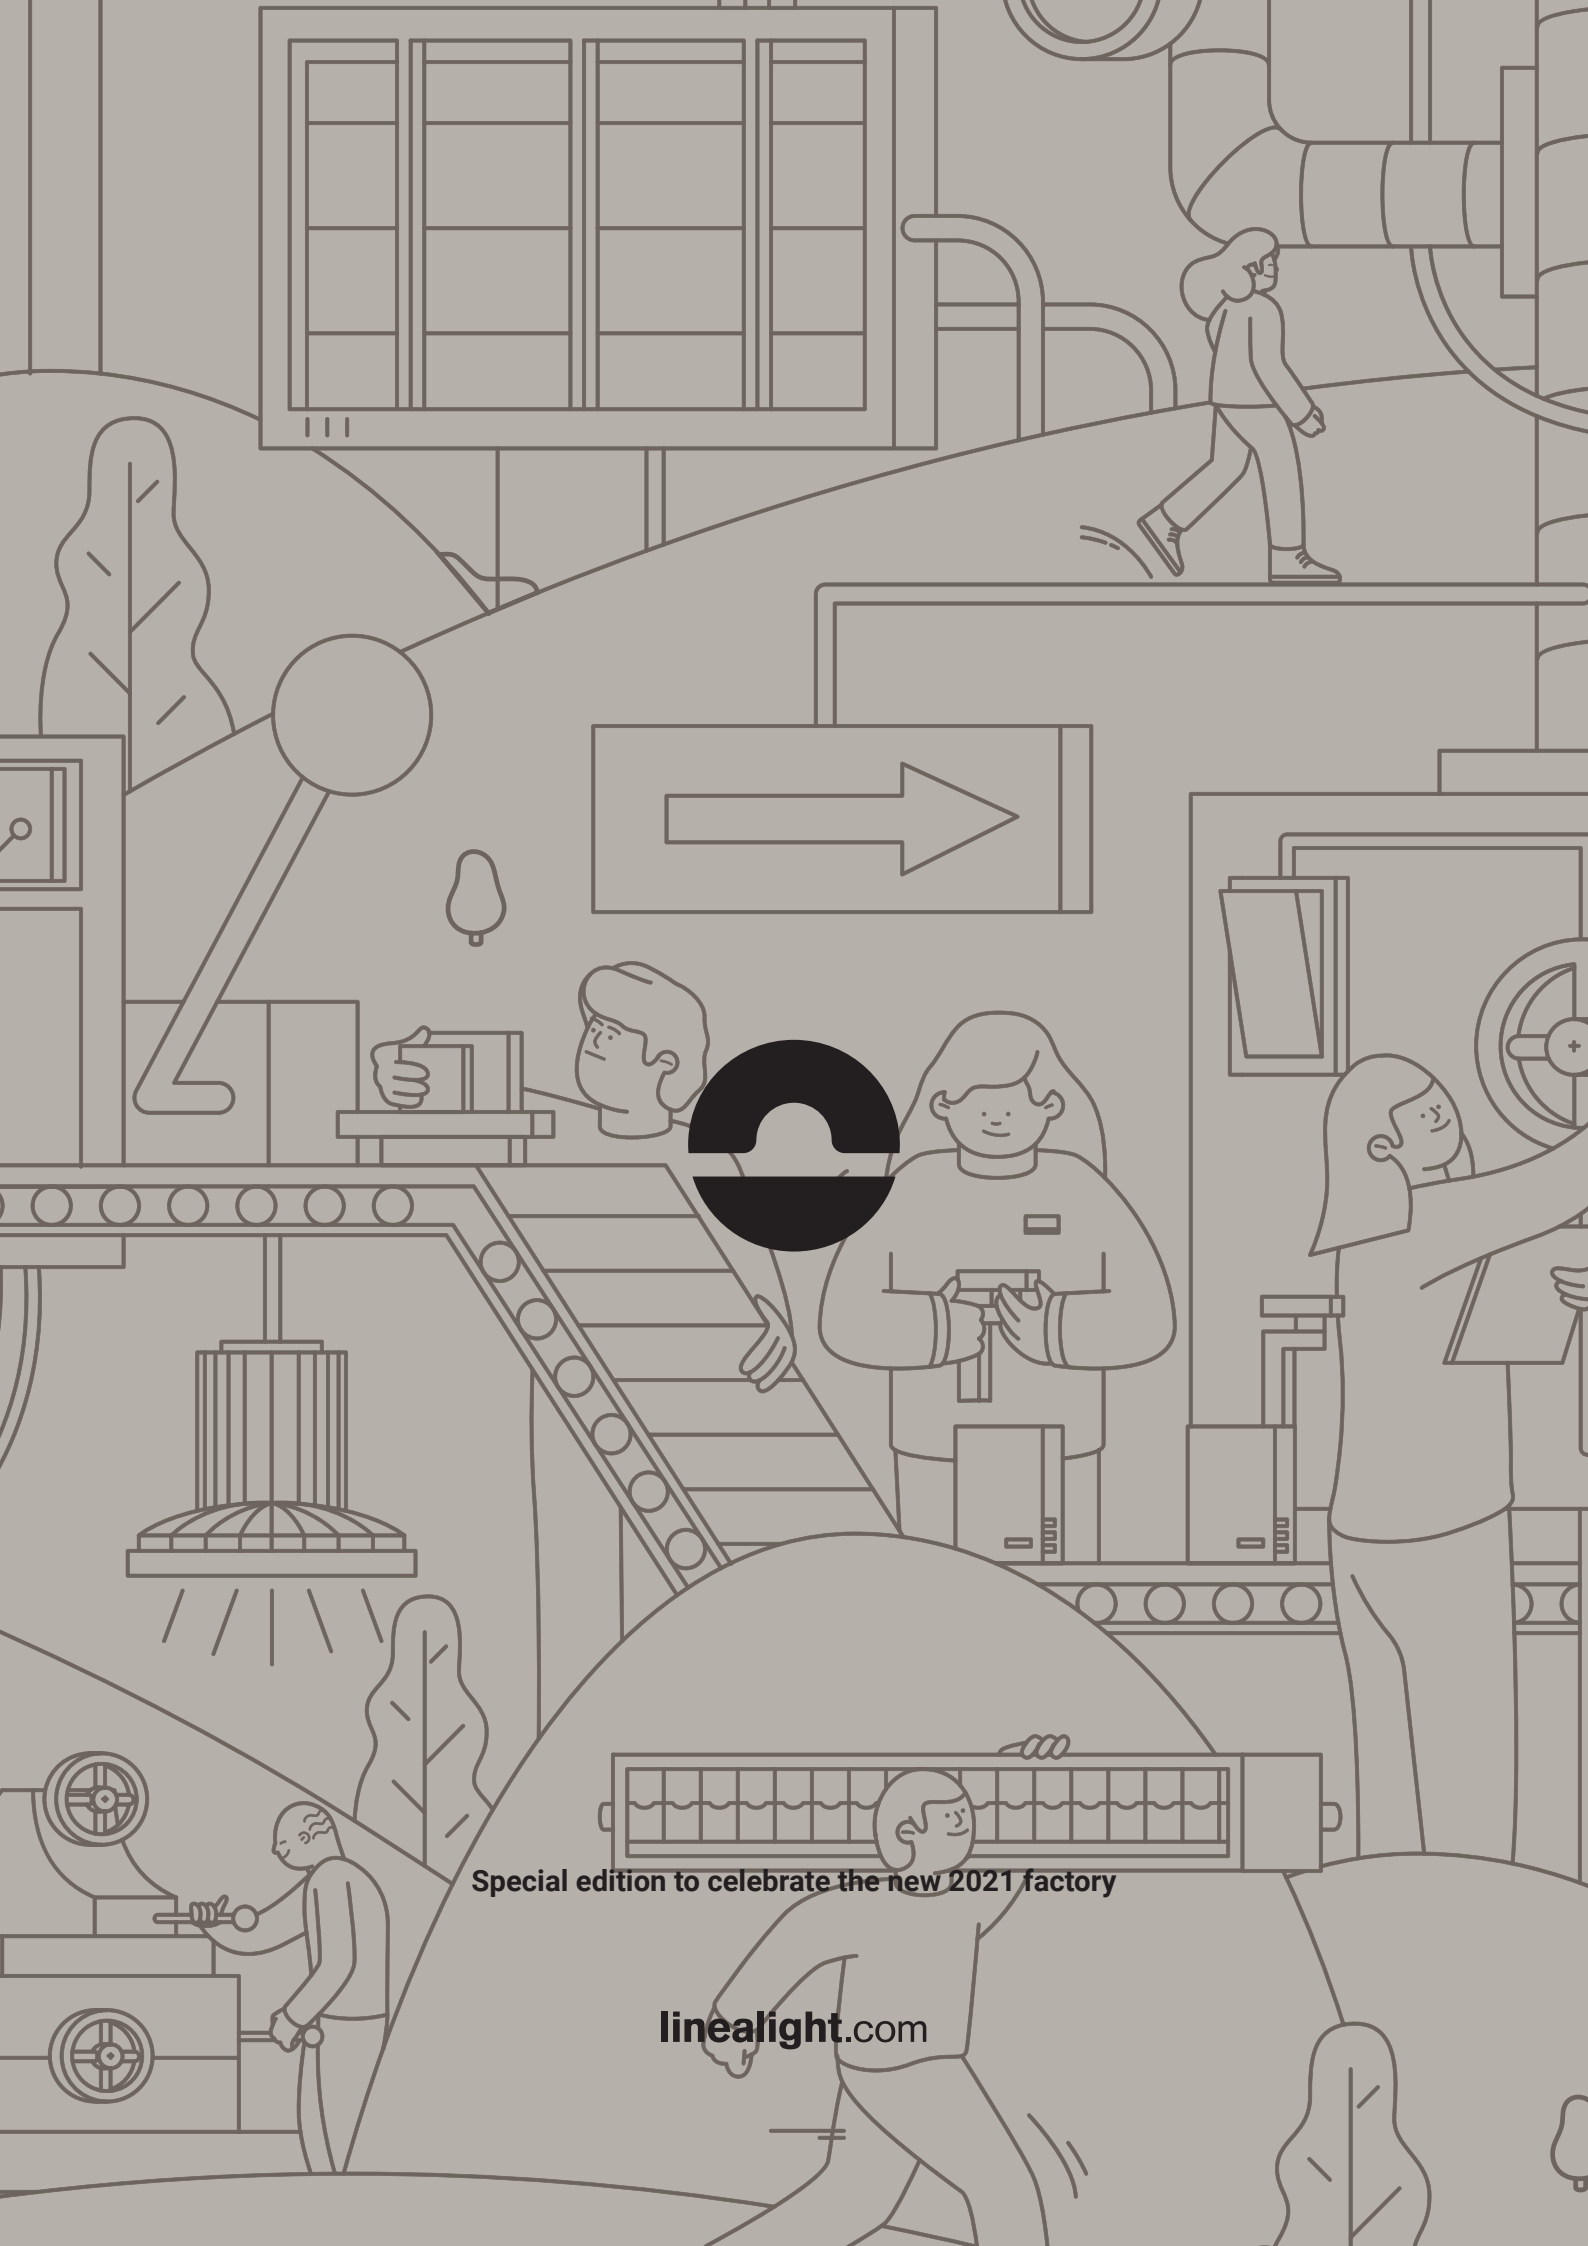

Special edition to celebrate the new 2021 factory

linealight.com