


Luminaire							
Code	C00008GGWSR						
Name	Buzzer Pro Bollards 6.5W DC						
Measurem.							
Code	RF_221109_01_5+						
Name	Buzzer Pro Bollards 6.5W DC						
Luminaire Flux	66 lm	Luminaire Power	8.5 W	Efficacy	7.809 lm/W	Efficiency	100.00%
Source Flux	66 lm	Maximum value	456.45 cd/klm	Position	C=50.00 G=52.50	CG	Sym. on planes 270-90

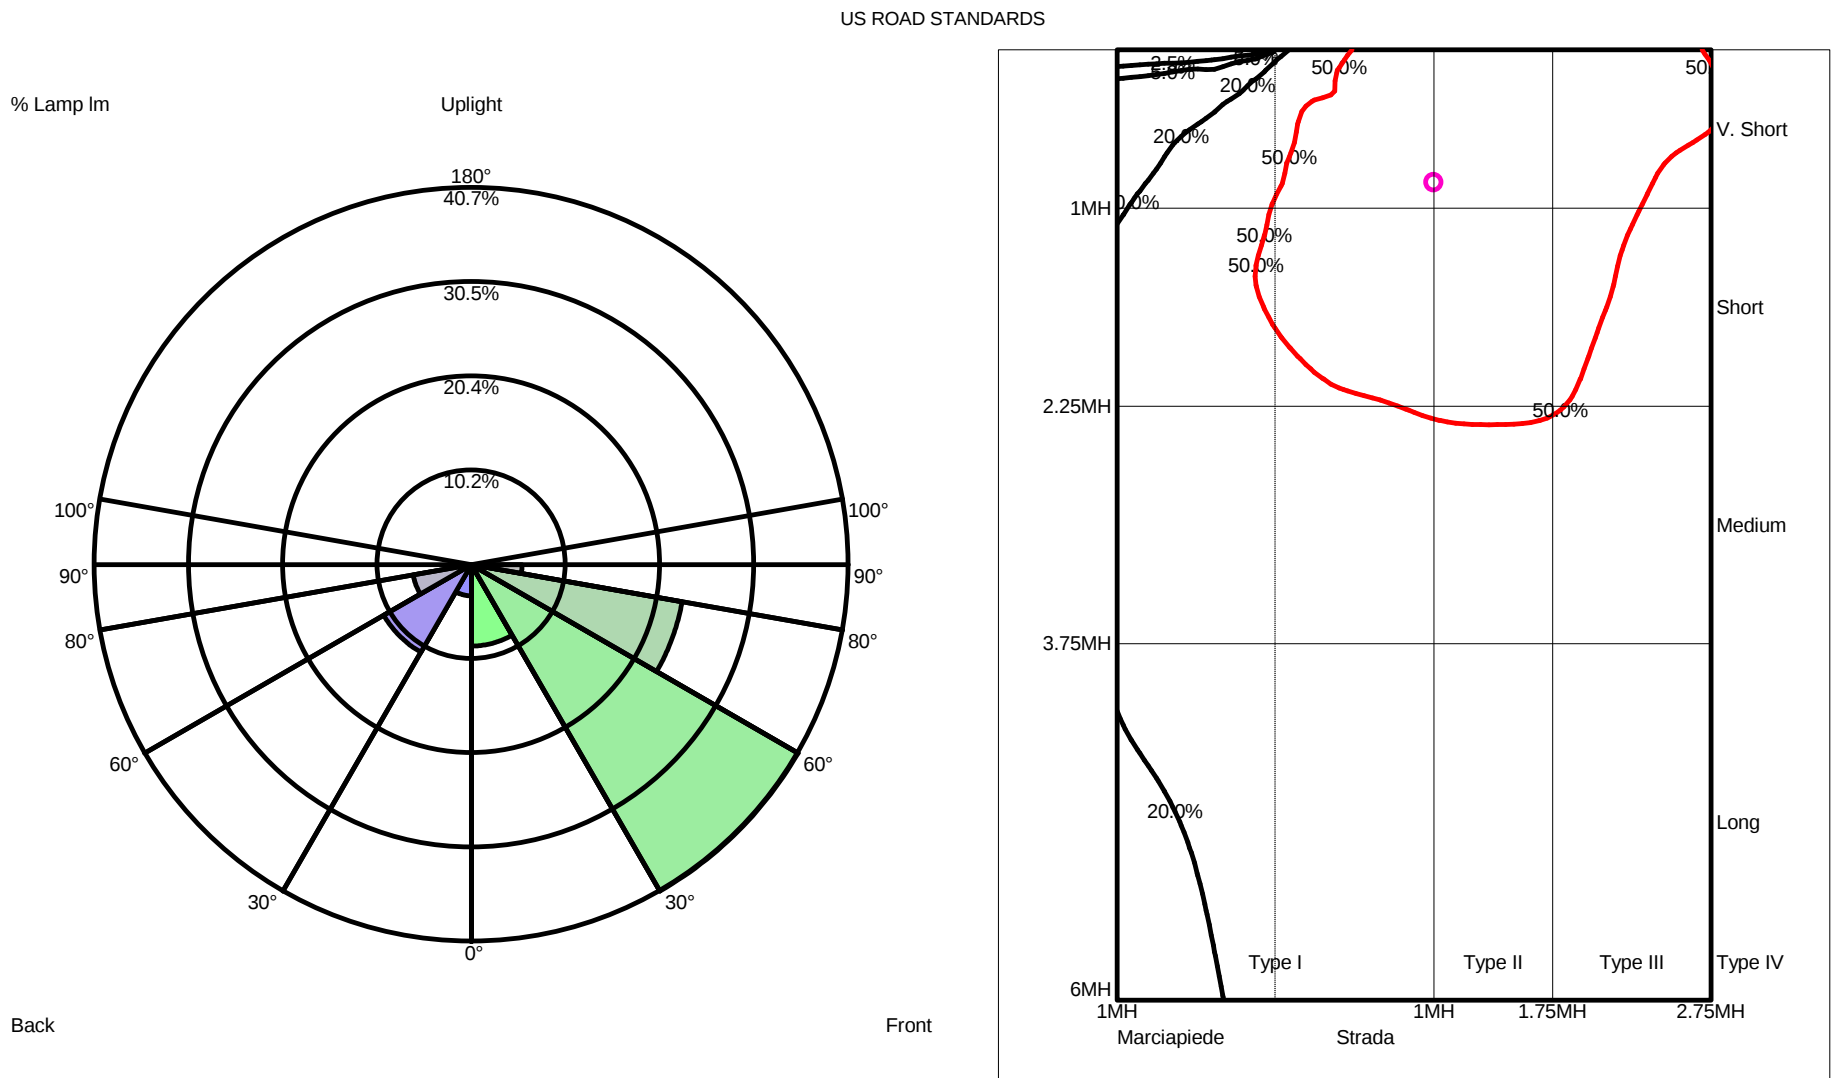

Luminaire Classification System (LCS)				
LCS Zone		Lumens	%Lamp	%Lum
FL	0° -- 30°	5.8 lm	8.8 %	8.8 %
FM	30° -- 60°	27.0 lm	40.7 %	40.7 %
FH	60° -- 80°	15.3 lm	23.1 %	23.1 %
FVH	80° -- 90°	3.6 lm	5.5 %	5.5 %
BL	0° -- 30°	2.2 lm	3.4 %	3.4 %
BM	30° -- 60°	7.3 lm	10.9 %	10.9 %
BH	60° -- 80°	4.2 lm	6.4 %	6.4 %
BVH	80° -- 90°	0.8 lm	1.2 %	1.2 %
UL	90° -- 100°	0.0 lm	0.0 %	0.0 %
UH	100° -- 180°	0.0 lm	0.0 %	0.0 %
TOTALS		66.4 lm	100.0 %	100.0 %
BUG B0 U0 G0 Type IV Very Short Asymmetrical				