





Uplights | 198-264 V AC /186-275 V DC | 1 x powerLED 1.6 W DC - 3 W AC | CRI 80  
**83565W08**

Single emission uplights for outdoor application. The warm white LED light source with a narrow spot light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 249 lm, with a 155.6 lm/W nominal luminous efficacy.

The device body is made of ot58 brass and features a chrome finish, processed by means of galvanic chromium plating. The ingress protection degree is IP67;

The total absorbed power is 3 W. The power supply cable is included and features a 1 m length.

The device features protection class II and can be wall lights or floor-mounted with an outer casing, code 84918(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Energieeffizienzklasse

ieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D.

### Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	68 %
Lichtstrom (Lichtquelle)	249 lm
Leuchten Lichtstrom	170 lm
Consumption	3 W
Leuchten Lichtausbeute	56 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	1.5 Step
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	50°C

### LED Life / Failure Ratio


L70 B10 C0 361980h (at Tj 60 Ta 25 )

### UGR

UGR axial	12.1
UGR transversal	12.2
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

Optik C0/C180	10°
Light distribution simmetry	Symmetrical

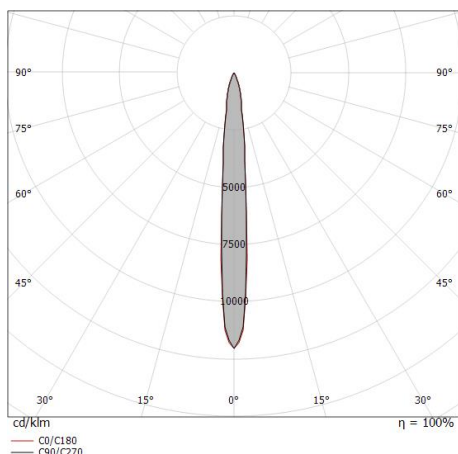

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.09 0.09	E(0°) 8135 E(C90) 5.1° 4041 E(C0) 5.2° 4081
1.0	0.18 0.18	E(0°) 2034 E(C90) 5.1° 1010 E(C0) 5.2° 1020
1.5	0.27 0.27	E(0°) 904 E(C90) 5.1° 449 E(C0) 5.2° 453
2.0	0.36 0.36	E(0°) 508 E(C90) 5.1° 253 E(C0) 5.2° 255
2.5	0.45 0.46	E(0°) 325 E(C90) 5.1° 162 E(C0) 5.2° 163
3.0	0.54 0.55	E(0°) 226 E(C90) 5.1° 112 E(C0) 5.2° 113

Distance [m] Cone diameter [m] illuminance [lx]

— C0/C180 (Half-peak divergence: 10.4°)  
 — C90/C270 (Half-peak divergence: 10.2°)



Beret\_2R | Uplights | Accessories  
**83565W08**



## Einbaugehäuse

installationsposition: boden; typ installation: mauerwerk L=87mm, H=60mm, D=60mm.

Material:Kunststoff ABS, farbe:Schwarz.

**Code**

84918