




Ceiling Downlights | 220-240 V AC /176-276 V DC  
3 x powerLEDs 5 W DC - 6 W AC | CRI 90  
**65191W45**



Technical data	
Type	Surface
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	powerLEDs
Optics	Medium Wide Flood
Light emission direction	downward
Nominal power	5 W DC
Total Power	6 W
Source lumens	543 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.170 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.350 Kg
Electrostatic discharge protection	Yes
Surge protection	Yes
Product technological characteristics	TVS

### Finishing casing

Material	Aluminium 6060 - PC
Colour	Black - black
Processing	Powder coating

### Finishing diffuser

Material	UV Resistant Polycarbonate
Colour	chrome
Processing	Metallization

### Cables Electrification

Cable connector	No
-----------------	----

The driver contained in the device complies with IEC 61347-2-13 annex J, and can therefore be powered by centralized power systems.

Ceiling Downlights | 220-240 V AC /176-276 V DC | 3 x powerLEDs 5 W DC - 6 W AC | CRI 90 | Base 65191W45

Single emission ceiling downlights for indoor application. The warm white LED light source is composed of 3 powered LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 543 lm, with a 108.6 lm/W nominal luminous efficacy.

The device body is made of PC and features a black finish. The device body is made of aluminium 6060 and features a black finish, processed by means of powder coating; the diffuser is made of uv resistant polycarbonate with a metallization treatment. The ingress protection degree is IP20; the total weight is of 0.350 kg.

The total absorbed power is 6 W. The power supply cable is included and features a 0.170 m length.

The device features protection class II and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class F.

### Illuminotechnical Features

Light Output Ratio (LOR)	65 %
Source lumens	543 lm
Delivered lumens	358 lm
Consumption	6 W
Luminaire efficacy	59 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### LED Life / Failure Ratio


L70 B20 C0 214455h (at Tj 60 Ta 25 )

### UGR

UGR axial	9.7
UGR transversal	10.9
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C0/C180 optics	49°
Light distribution symmetry	Symmetrical

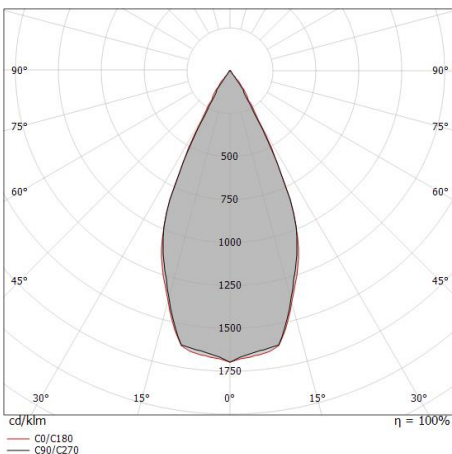

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.46	E(0°) 2422 E(C0) 916
1.0	0.92	E(0°) 606 E(C0) 229
1.5	1.38	E(0°) 269 E(C0) 102
2.0	1.84	E(0°) 151 E(C0) 57
2.5	2.30	E(0°) 97 E(C0) 37
3.0	2.76	E(0°) 67 E(C0) 25

Distance [m] Cone diameter [m] Illuminance [lx]  
— C0/C180 (Half-peak divergence: 49.4°)