
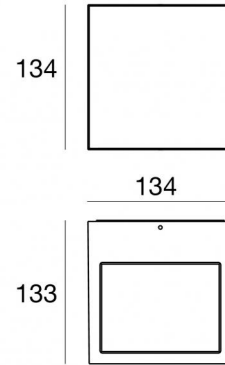


Wall Lights | arrayLED 0 W AC 200-264 V AC
CRI 80
76313N30

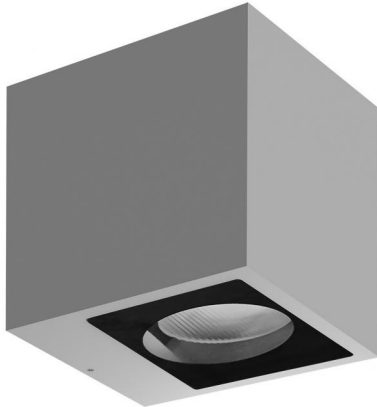

| Technical data | |
|--|-----------------|
| Type | Surface |
| Installation position | Wall lights |
| Installation environment | Outdoor |
| Light Source | LED |
| Circuit structure | arrayLED |
| Optics | Medium Flood |
| Light emission direction | upward |
| Nominal power | 0 W AC |
| Input voltage range | 200-264V |
| CCT / Tone | 4000 K |
| Colour rendering index | 80 Ra |
| C.C. / C.V. | AC |
| Safety class | 1 |
| IP | IP65 |
| IK | IK08 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Dimmable article | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |
| Type of light emission | Single emission |
| Net weight | 1.93 Kg |
| Electrostatic discharge protection | No |
| Surge protection | 1,5 KV |

| Finishing casing | |
|------------------|--------------------------------------|
| Material | Die-cast Aluminium EN AB - 46100 |
| Colour | Grey |
| Processing | Open pore anodizing + Powder Coating |

| Finishing diffuser | |
|--------------------|------------------------------|
| Material | Extra clear glass - Tempered |
| Colour | transparent |
| Processing | Silk-screening |