

Warp_R EVO



Downlights | 1 arrayLED 14 W DC 400 mA | CRI 90
77342N30



Technical data

Type	Encasement with flange
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	arrayLED
Optics	Medium Flood
Light emission direction	downward
Nominal power	14 W DC
Source lumens	2411 lm
Input voltage range	400mA
CCT / Tone	4000 K
Colour rendering index	90 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP40
Optical compartment IP	IP65
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.2 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.3 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Technopolymer
Colour	White RAL 9003



Finishing diffuser

Material	UV Resistant Polycarbonate
Colour	transparent

Finishing radiator

Material	Die-cast Aluminium EN AB - 46100
Colour	Aluminium
Processing	Polishing

Electronics



Cables Electrification

Cable connector	JST Quick connector Male + Female
-----------------	-----------------------------------



Downlights | 1 arrayLED 14 W DC 400 mA | CRI 90 | Base 77342N30

Single emission recessed downlights for indoor application. The natural white LED light source with a medium flood light distribution is composed of 1 arrayed LEDs with CCT of 4000 K and a CRI 90; the source luminous flux is 2411 lm, with a 172.2 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white ral 9003 finish; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP40; the total weight is of 0.3 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 14 W. The power supply cable is included and features a 0.2 m length.

The device features protection class III and can be ceiling-mounted, with a 92 mm diameter hole (in plasterboard) with an outer casing, code 89374(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	84 %
Source lumens	2411 lm
Delivered lumens	2043 lm
Consumption	14 W
Luminaire efficacy	145 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	90 Ra
Colour Rendering Index	60 R9
Black Body Locus	On
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

LED Life / Failure Ratio


L70 B10 C0 252000h (at Tj 65 Ta 25)

UGR

UGR axial	11.4
UGR transversal	11.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	32°
Light distribution simmetry	Symmetrical

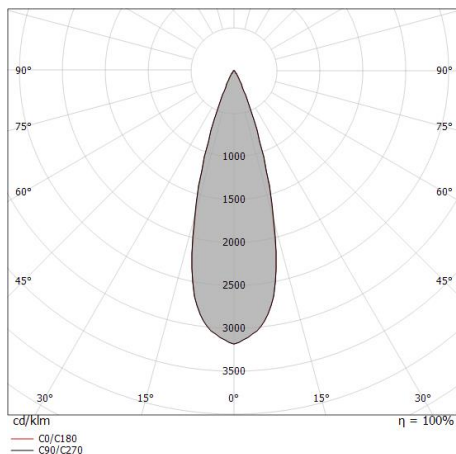

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.29 0.28	E(0°) 26013 E(C90) 11649 E(C0) 11574
1.0	0.57 0.57	E(0°) 6503 E(C90) 2912 E(C0) 2894
1.5	0.86 0.85	E(0°) 2890 E(C90) 1294 E(C0) 1286
2.0	1.15 1.14	E(0°) 1626 E(C90) 728 E(C0) 723
2.5	1.43 1.42	E(0°) 1041 E(C90) 466 E(C0) 463
3.0	1.72 1.71	E(0°) 723 E(C90) 324 E(C0) 322

— C0/C180 (Half-peak divergence: 31.8°)
— C90/C270 (Half-peak divergence: 32.0°)

COLOR VECTOR GRAPHIC



Warp_R EVO




Warp_R EVO | Downlights | Accessories
77342N30



Outer casing
installation position: ceiling; type of installation: masonry L=200mm, H=113mm, D=137mm.
Material:polypropylene, colour:white.

Code
89373




Outer casing
installation position: ceiling; type of installation: masonry L=370mm, H=120mm, D=200mm.
Material:polypropylene, colour:white.

Code
89374




White Quantum_R EVO frontal Kit

Code
83373



Black Vos_R EVO frontal Kit

Code
83378



White Vos_R EVO frontal Kit

Code
83377



Black Quantum_R EVO frontal Kit

Code
83374




White Warp_R EVO frontal Kit

Code
83375




Black Warp_R EVO frontal Kit

Code
83376



White front adaptive flange for Warp EVO

Code
83395



Black front adaptive flange for Warp EVO

Code
83390



Gold Quantum_R EVO frontal Kit

Code
C-K400046



Copper Quantum EVO frontal Kit

Code
C-K400047



Copper Warp_R EVO frontal Kit

Code
C-K400049



Gold Warp_R EVO frontal Kit

Code
C-K400048



Gold Vos_R EVO frontal Kit









Code
C-K400050



Copper Vos_R EVO frontal Kit

Code
C-K400051



 <p>Ø109</p>	<p>Gold front adaptive flange for Warp EVO</p>	<p>Code <u>C-K400052</u></p>
 <p>Ø109</p>	<p>Copper front adaptive flange for Warp EVO</p>	<p>Code <u>C-K400053</u></p>
 <p>Ø106</p>	<p>Gold front adaptive flange for Quantum EVO</p>	<p>Code <u>C-K400054</u></p>
 <p>Ø106</p>	<p>Copper front adaptive flange for Quantum EVO</p>	<p>Code <u>C-K400055</u></p>
	<p>Anti-glare Anti-glare Type: honeycomb louvre. Material:Pom-C, colour:Black.</p>	<p>Code <u>83379</u></p>
	<p>Diffuser Diffuser Type: elliptical filter</p>	<p>Code <u>83380</u></p>
	<p>Diffuser Diffuser Type: aesthetic filter</p>	<p>Code <u>83381</u></p>
	<p>Optics - Steel AISI 304L Light distribution: flood,Cover material: uv resistant polycarbonate</p>	<p>Code <u>83382</u></p>



Optics

Light distribution: medium flood,Cover material: ,uv resistant polycarbonate,uv resistant polycarbonate,uv resistant polycarbonate

Code

83383



Optics

Light distribution: wide flood,Cover material: ,uv resistant polycarbonate,uv resistant polycarbonate,uv resistant polycarbonate

Code

83384