



Uplights | 1 x powerLED 8 W DC 630 mA | CRI 80  
80546M06



Technical data	
Type	Drive Over
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Ultra Spot
Light emission direction	upward
Nominal power	8 W DC
Source lumens	877 lm
Input voltage range	630mA
CCT / Tone	2700 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP68
Installation limitations	Not for underwater use
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	2500 Kg
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.678 Kg
Electrostatic discharge protection	No
Surge protection	No
Product technological characteristics	Acquastop - TVS

### Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	black
Processing	Open pore anodizing + Powder Coating

### Finishing flange

Material	AISI 316L steel
Colour	steel
Processing	Brushing

### Electronics



99186  
On/Off Driver 198-264V AC (1 - 3 art.)



C-E200008  
On/Off Driver 198-264V AC / 180-275V DC (1 art.)

### Cables Electrification

Cable connector	No
-----------------	----

## Uplights | 1 x powerLED 8 W DC 630 mA | CRI 80 | Base 80546M06

Single emission uplights for outdoor application. The super warm white LED light source with a ultra spot light distribution is composed of 1 powered LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 877 lm, with a 109.6 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating. The ingress protection degree is IP68; the total weight is of 0.678 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 8 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 99680(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class E.

### Illuminotechnical Features

Light Output Ratio (LOR)	69 %
Source lumens	877 lm
Delivered lumens	613 lm
Consumption	8 W
Luminaire efficacy	76 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra
Black Body Locus	On

Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### LED Life / Failure Ratio


L70 B10 C0 247450h (at Tj 60 Ta 25 )

### UGR

UGR axial	16.1
UGR transversal	16.1
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C0/C180 optics	9°
Light distribution simmetry	Symmetrical


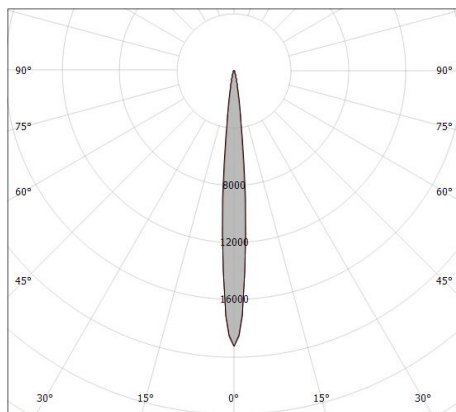


Distance [m]	Cone diameter [m]	illuminance [lx]	E(0°)	E(C90)	E(C0)
0.5	0.08 0.08		47156	4.7° 23725	4.6° 23993
1.0	0.16 0.16		11789	4.7° 5931	4.6° 5998
1.5	0.25 0.24		5240	4.7° 2636	4.6° 2666
2.0	0.33 0.32		2947	4.7° 1483	4.6° 1500
2.5	0.41 0.40		1886	4.7° 949	4.6° 960
3.0	0.49 0.48		1310	4.7° 659	4.6° 666

Distance [m]      Cone diameter [m]      illuminance [lx]

— C0/C180 (Half-peak divergence: 9.2°)  
— C90/C270 (Half-peak divergence: 9.4°)

### COLOR VECTOR GRAPHIC

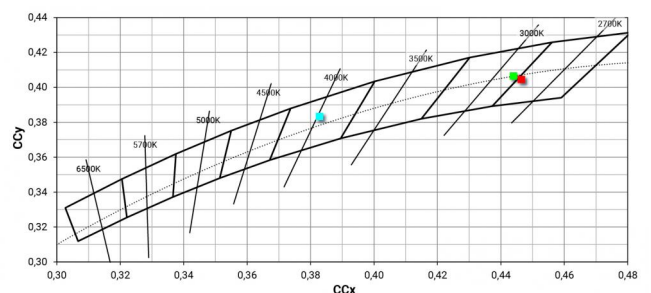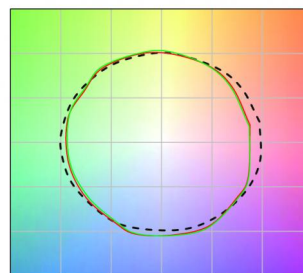



Suelo\_R | Uplights | Accessories  
**80546M06**



Outer casing

installation position: floor, land; type of installation: masonry L=85mm, H=155mm,  
D=85mm.

Material:ABS Plastic, colour:black.

**Code**

99680