




Uplights | 1 x powerLED 8 W DC 630 mA | CRI 80  
80549W15

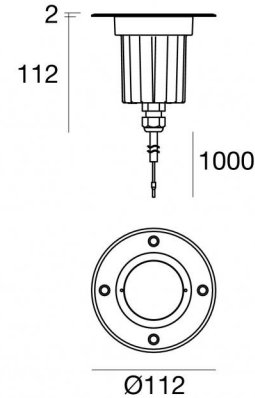

Technical data	
Type	Drive Over
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	powerLED
Optics	Spot
Light emission direction	upward
Nominal power	8 W DC
Source lumens	945 lm
Input voltage range	630mA
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP68
Installation limitations	Not for underwater use
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	2500 Kg
Cable included	Yes
Cable length	1 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.700 Kg
Electrostatic discharge protection	No
Surge protection	No
Optics technology	Honey comb
Product technological characteristics	Acquastop - TVS

### Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	black
Processing	Open pore anodizing + Powder Coating

### Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent

### Finishing flange

Material	AISI 316L steel
Colour	steel
Processing	Brushing

### Electronics



99186  
On/Off Driver 198~264V AC (1 - 3 art.)



C-E200008  
On/Off Driver 198~264V AC / 180~275V DC (1 art.)

### Cables Electrification

Cable connector	No
-----------------	----



## Uplights | 1 x powerLED 8 W DC 630 mA | CRI 80 | Base 80549W15

Single emission uplights for outdoor application. The warm white LED light source with a spot light distribution is composed of 1 powerLEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 945 lm, with a 118.1 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a black finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass - tempered. The ingress protection degree is IP68; the total weight is of 0.700 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 8 W. The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 98121 (for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

### Energy efficiency class

This product contains a light source of energy efficiency class E.

### Illuminotechnical Features

Light Output Ratio (LOR)	50 %
Source lumens	945 lm
Delivered lumens	478 lm
Consumption	8 W
Luminaire efficacy	59 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra
Standard Operating Ambient Temperature	-20 / +50°C
Ordinary temperature on the glass	40°C

### LED Life / Failure Ratio


L70 B10 C0 247450h (at Tj 60 Ta 25 )

### UGR

UGR axial	9.7
UGR transversal	9.6
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

### OPTICAL

C0/C180 optics	14°
Light distribution symmetry	Symmetrical

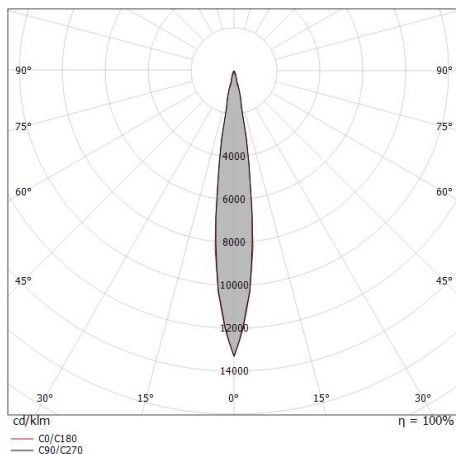

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	0.12 0.13	E(0°) 25409 E(C90) 7.1° 12449 E(C0) 7.2° 12454
1.0	0.25 0.25	E(0°) 6352 E(C90) 7.1° 3112 E(C0) 7.2° 3114
1.5	0.37 0.38	E(0°) 2823 E(C90) 7.1° 1383 E(C0) 7.2° 1384
2.0	0.50 0.51	E(0°) 1588 E(C90) 7.1° 778 E(C0) 7.2° 778
2.5	0.62 0.63	E(0°) 1016 E(C90) 7.1° 498 E(C0) 7.2° 498
3.0	0.75 0.76	E(0°) 706 E(C90) 7.1° 346 E(C0) 7.2° 346

— C0/C180 (Half-peak divergence: 14.4°)  
— C90/C270 (Half-peak divergence: 14.2°)



Suelo\_RX | Uplights | Accessories  
**80549W15**



Outer casing

installation position: floor, land; type of installation: masonry L=110mm, H=155mm,  
D=110mm.

Material:ABS Plastic, colour:black.

**Code**

98121